


Schottky Powermod

FST19235 — FST19245

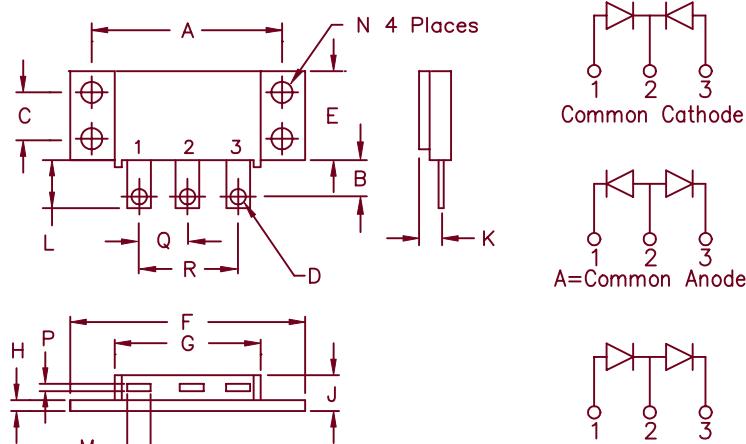

Notes:
Baseplate: Nickel plated copper;
electrically isolated
Pins: Nickel plated copper

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	1.995	2.005	50.67	50.93	
B	0.300	0.325	7.62	8.26	
C	0.495	0.505	12.57	12.83	
D	0.182	0.192	4.62	4.88	Dia.
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.500	1.525	38.10	38.70	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60 to Lead CL	
L	0.490	0.510	12.45	12.95	
M	0.330	0.350	8.38	6.90	
N	0.175	0.195	4.45	4.95	Dia.
P	0.035	0.045	0.89	1.14	
Q	0.445	0.455	11.30	11.56	
R	0.890	0.910	22.61	23.11	

TO-249

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST19235*	35V	35V
FST19240*	40V	40V
FST19245*	45V	45V

*Add the Suffix A for Common Anode, D for Doubler

- Guard Ring Protection
- Electrically Isolated Base
- Schottky Barrier Rectifier
- Low Forward Voltage
- Reverse Energy Tested
- V_{RRM} 35 to 45 Volts

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Peak Reverse Current per leg
Typical Junction Capacitance per leg

$I_F(AV)$ 200 Amps
 $I_F(AV)$ 100 Amps
 I_{FSM} 1500 Amps
 V_{FM} 0.40 Volts
 V_{FM} 0.52 Volts
 I_{RM} 2A
 I_{RM} 10 mA
 C_J 5500 pF

$T_C = 86^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.35^\circ\text{C}/\text{W}$
 $T_C = 86^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.7^\circ\text{C}/\text{W}$
8.3ms, half sine, $T_J = 150^\circ\text{C}$
 $|I_{FM} = 100\text{A}; T_J = 150^\circ\text{C}^*$
 $|I_{FM} = 100\text{A}, T_J = 25^\circ\text{C}^*$
 $V_{RRM}, T_J = 125^\circ\text{C}^*$
 $V_{RRM}, T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 150°C
Operating junction temp range	T_J	-55°C to 150 °C
Max thermal resistance per leg	$R_{\theta JC}$	0.7°C/W Junction to case
Max thermal resistance per pkg.	$R_{\theta JC}$	0.35°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.1°C/W Case to sink
Weight		2.3 ounces (58.5 grams) typical
Mounting Torque		15–20 inch pounds

FST19235 – FST19245

Figure 1
Typical Forward Characteristics – Per Leg

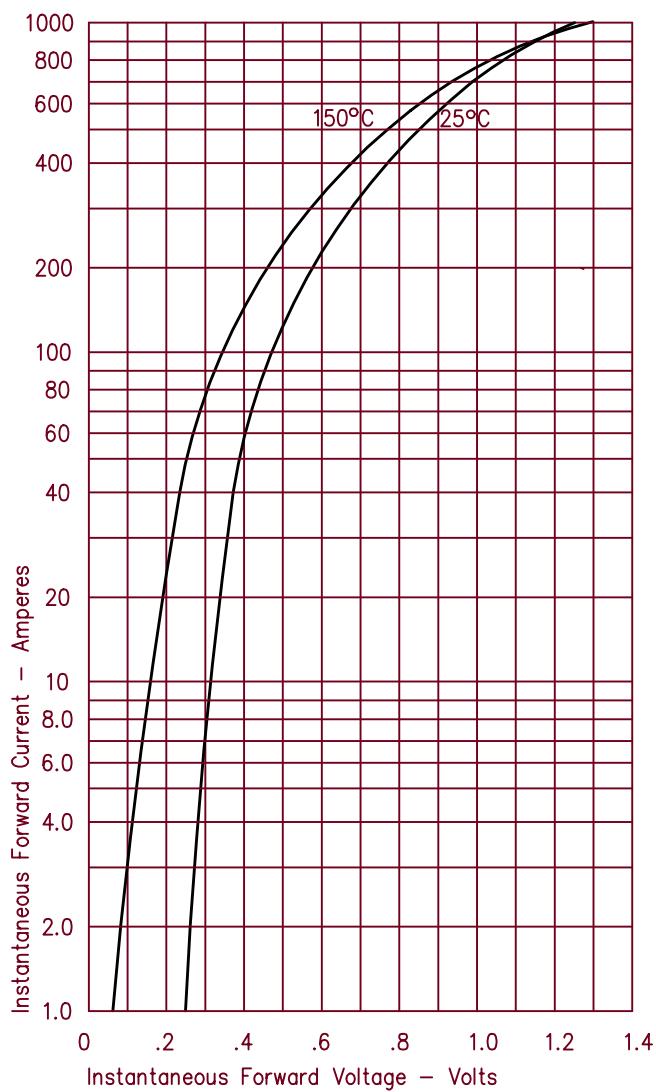


Figure 2
Typical Reverse Characteristics – Per Leg

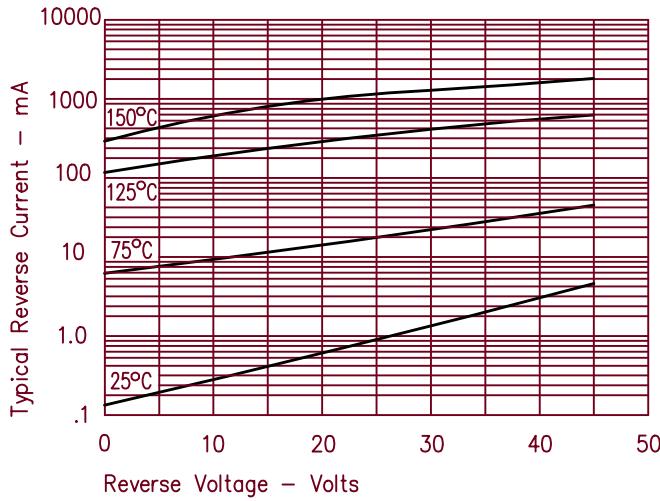


Figure 3
Typical Junction Capacitance – Per Leg

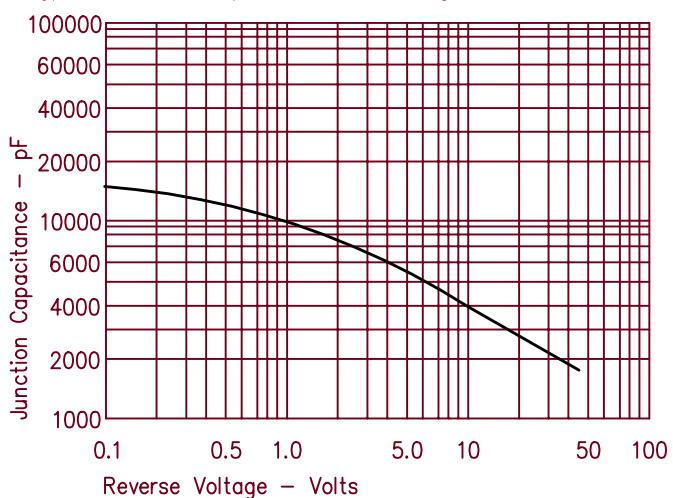


Figure 4
Forward Current Derating – Per Leg

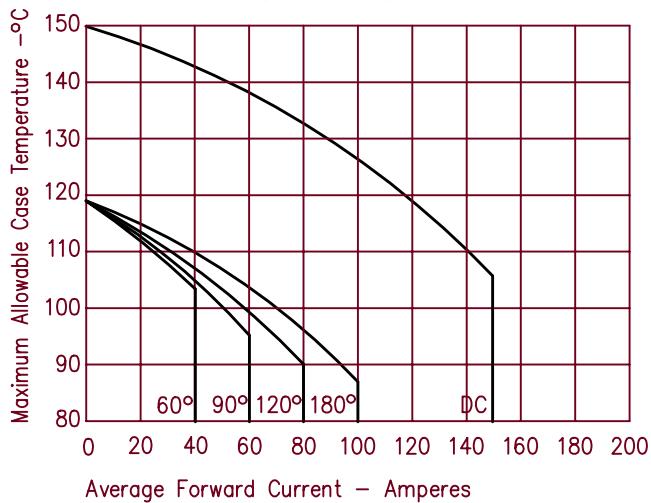


Figure 5
Maximum Forward Power Dissipation – Per Leg

