


Aluminum Capacitors Radial Semi-Professional



Fig.1 Component outline.

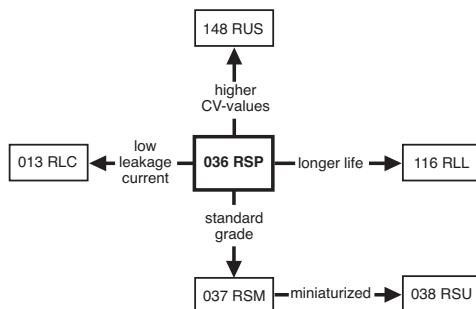

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes ($\text{ØD} \times \text{L}$ in mm)	5 × 11 and 8.2 × 11
Rated capacitance range, C_R	0.47 to 470 μF
Tolerance on C_R	$\pm 20\%$; $\pm 10\%$ on request
Rated voltage range, U_R	6.3 to 160 V
Category temperature range	-55 to +85 °C
Endurance test at 85 °C	2000 hours
Useful life at 105 °C	750 hours
Useful life at 85 °C	3000 hours
Useful life at 40 °C, 1.4 × I_R applied	80000 hours
Shelf life at 0 V, 85 °C	500 hours
Based on sectional specification	IEC 60384-4/EN130 300
Climatic category IEC 60068	55/085/56

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case, all-insulated (light blue)
- Natural pitch 2.5 mm and 5 mm
- Charge and discharge proof
- Miniaturized, high CV-product per unit volume
- Reduced leakage current
- Lead (Pb)-free versions are RoHS compliant.



RoHS
COMPLIANT

APPLICATIONS

- Automotive, telecommunication, industrial, EDP and audio-video
- Coupling, decoupling, smoothing, filtering, buffering, timing
- Portable and mobile equipment (small size, low mass).

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF).
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$).
- Rated voltage (in V).
- Date code in accordance with IEC 60062.
- Code indicating factory of origin.
- Name of manufacturer.
- Minus-sign on top to identify the negative terminal.
- Series number (036).

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\text{ØD} \times \text{L}$ in mm)

C_R (μF)	U_R (V)									
	6.3	10	16	25	35	40	50	63	100	160
0.47	—	—	—	—	—	—	—	5 × 11	—	—
1.0	—	—	—	—	—	—	—	5 × 11	—	—
2.2	—	—	—	—	—	—	—	5 × 11	—	8.2 × 11
3.3	—	—	—	—	—	—	—	5 × 11	—	—
4.7	—	—	—	—	—	—	—	5 × 11	—	8.2 × 11
6.8	—	—	—	—	—	—	—	5 × 11	—	—
10	—	—	—	—	—	—	—	5 × 11	5 × 11	8.2 × 11
15	—	—	—	—	—	—	5 × 11	—	5 × 11	—
22	—	—	—	—	5 × 11	—	—	5 × 11	8.2 × 11	—
33	—	—	5 × 11	—	—	—	5 × 11	8.2 × 11	—	—
47	—	5 × 11	—	—	5 × 11	—	8.2 × 11	8.2 × 11	—	—
68	—	—	—	5 × 11	—	8.2 × 11	—	8.2 × 11	—	—
100	5 × 11	—	5 × 11	8.2 × 11	—	—	8.2 × 11	—	—	—
150	—	5 × 11	8.2 × 11	—	8.2 × 11	—	—	—	—	—
220	—	8.2 × 11	8.2 × 11	8.2 × 11	—	—	—	—	—	—
330	8.2 × 11	—	8.2 × 11	—	—	—	—	—	—	—
470	—	8.2 × 11	—	—	—	—	—	—	—	—




DIMENSIONS in millimeters **AND AVAILABLE FORMS**


Fig.2 Form CA: Long leads




Case ØD x L = 8.2 x 11 mm only

Fig.3 Form CB: Cut leads

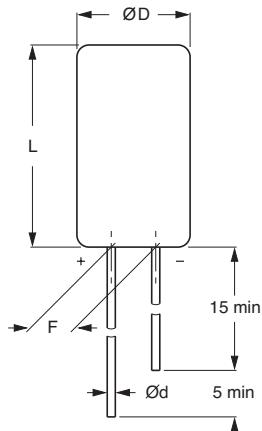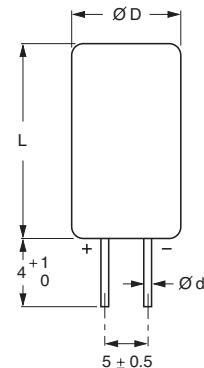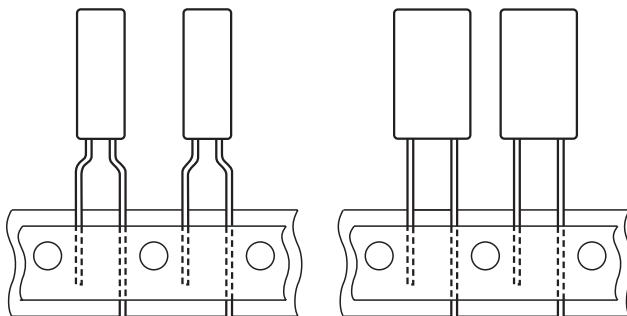

Pitch F = 5 mm.
 Case ØD x L = 5 x 11 and 8.2 x 11 mm.

Fig.4 Form TFA: Taped in box (AMMOPACK)

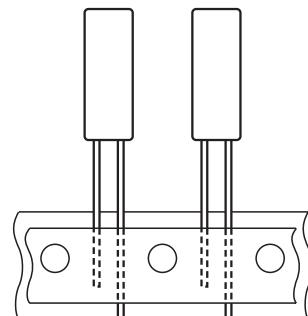

Pitch F = 2.5 mm.
 Case ØD x L = 5 x 11 mm only.

Fig.5 Form TNA: Taped in box (AMMOPACK)

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES								PACKAGING QUANTITIES	
NOMINAL CASE SIZE ØD x L	CASE CODE	Ød	ØD _{max}	L _{max}	F	MASS (g)	PACKAGING QUANTITIES		
							FORM CA, CB	FORM TFA, TNA	
5 x 11	11	0.5	5.5	12	2.5 ± 0.5	≈ 0.4	1000	2000	
8.2 x 11	13	0.6	8.7	12	5.0 ± 0.5	≈ 1.1	1000	1000	

Note

1. Tape dimensions see section 'PACKAGING'.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 Hz, 85 °C
I_{L1}	max. leakage current after 1 minute at U_R
Tan δ	max. dissipation factor at 100 Hz
Z	max. impedance at 10 kHz and 20 °C

Note

1. Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20$ °C, P = 86 to 106 kPa, RH = 45 to 75%.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION														
U_R (V)	C_R 100 Hz (μ F)	NOMINAL CASE SIZE $\emptyset D \times L$ (mm)	I_R 100 Hz 85 °C (mA)	I_{L1} 1 min 100 Hz (μ A)	Tan δ 100 Hz	Z 10 kHz (Ω)	CATALOG NUMBER 2222 036							
							BULK PACKAGING			TAPED AMMOPACK				
							FORM CA	F (mm)	FORM CB	F (mm)	FORM TFA	F (mm)	FORM TNA	F (mm)
6.3	100 330	5 × 11 8.2 × 11	130 300	7 16	0.20 0.20	1.7 0.52	53101 53331	2.5 5.0	— 63331	— 5.0	33101 33331	5.0 5.0	73101 —	2.5 —
10	47 150 220 470	5 × 11 5 × 11 8.2 × 11 8.2 × 11	95 150 260 400	6 12 17 31	0.16 0.20 0.16 0.20	2.8 1.3 0.59 0.43	54479 54151 54221 54471	2.5 2.5 5.0 5.0	— — 5.0 5.0	— — 34221 34471	34479 34151 34221 34471	5.0 5.0 5.0 5.0	74479 74151 — —	2.5 2.5 — —
16	33 100 150 220 330	5 × 11 5 × 11 8.2 × 11 8.2 × 11 8.2 × 11	90 160 230 280 390	7 13 18 24 35	0.14 0.16 0.14 0.16 0.16	2.7 1.6 0.6 0.55 0.48	55339 55101 55151 55221 55331	2.5 2.5 5.0 5.0 5.0	— — 65151 65221 65331	— — 5.0 5.0 5.0	35339 35101 35151 35221 35331	5.0 5.0 5.0 5.0 5.0	75339 75101 — — —	2.5 2.5 — — —
25	68 100 220	5 × 11 8.2 × 11 8.2 × 11	140 210 310	13 18 36	0.14 0.12 0.14	1.8 0.7 0.55	56689 56101 56221	2.5 5.0 5.0	— 66101 66221	— 5.0 5.0	36689 36101 36221	5.0 5.0 5.0	76689 — —	2.5 — —
35	22 47 150	5 × 11 5 × 11 8.2 × 11	87 130 270	8 13 35	0.10 0.12 0.12	2.7 1.9 0.6	90001 90094 90099	2.5 2.5 5.0	— — 90101	— — 5.0	90027 90098 90103	5.0 5.0 5.0	90389 90391 —	2.5 2.5 —
40	15 68	5 × 11 8.2 × 11	72 180	7 20	0.10 0.10	3.7 0.81	57159 57689	2.5 5.0	— 67689	— 5.0	37159 37689	5.0 5.0	77159 —	2.5 —
50	10 33 47 100	5 × 11 5 × 11 8.2 × 11 8.2 × 11	60 110 160 250	6 13 18 33	0.08 0.10 0.08 0.10	4.5 2.1 0.96 0.7	90004 90104 90011 90109	2.5 2.5 5.0 5.0	— — 90012 90111	— — 5.0 5.0	90028 90108 90031 90113	5.0 5.0 5.0 5.0	90392 90393 — —	2.5 2.5 — —
63	0.47 1.0 2.2 3.3 4.7 6.8 10 10 15 22 22 33 47 68	5 × 11 5 × 11 5 × 11 5 × 11 5 × 11 5 × 11 5 × 11 8.2 × 11 8.2 × 11 5 × 11 8.2 × 11 8.2 × 11 8.2 × 11 8.2 × 11	5 11 25 38 45 55 70 120 80 100 150 160 190 210	4 4 4 5 5 6 7 7 9 11 11 16 21 29	0.06 0.06 0.06 0.06 0.06 0.06 0.06 0.04 0.07 0.08 0.05 0.06 0.07 0.08	85 40 18 12 8.5 5.9 4.0 2.8 3.1 2.7 1.4 1.2 1.0 0.88	58477 58108 58228 58338 58478 58688 58109 90036 58159 58229 90117 58339 58479 58689	2.5 2.5 2.5 2.5 2.5 2.5 2.5 5.0 2.5 2.5 5.0 5.0 5.0 5.0	— — — — — — — 90041 — — — — — — —	38477 38108 38228 38338 38478 38688 38109 90181 38159 38229 90118 68339 68479 68689	5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0	78477 78108 78228 78338 78478 78688 78109 — 78159 78229 90139 38339 38479 38689	2.5 2.5 2.5 2.5 2.5 2.5 2.5 — 2.5 2.5 5.0 5.0 5.0 5.0	— — — — — — — — — — — — — —
100	10 22	8.2 × 11 8.2 × 11	80 110	9 16	0.06 0.06	3.5 1.8	59109 59229	5.0 5.0	69109 69229	5.0 5.0	39109 39229	5.0 5.0	— —	— —
160	2.2 4.7	8.2 × 11 8.2 × 11	45 62	75 115	0.05 0.07	14 9.6	90333 90337	5.0 5.0	90334 90338	5.0 5.0	90336 90341	5.0 5.0	— —	— —

ADDITIONAL ELECTRICAL DATA

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_S \leq 1.15 U_R$
Reverse voltage		$U_{rev} \leq 1 V$
Current		
Leakage current	after 1 minute: $U_R = 6.3$ to 100 V $U_R = 160$ V	$I_{L1} \leq 0.006 C_R \times U_R + 3 \mu A$ $I_{L1} \leq 0.1 C_R \times U_R + 40 \mu A$
	after 5 minutes: $U_R = 6.3$ to 100 V $U_R = 160$ V	$I_{L5} \leq 0.001 C_R \times U_R + 3 \mu A$ $I_{L5} \leq 0.015 C_R \times U_R + 10 \mu A$
Inductance		
Equivalent series inductance (ESL)	case $\emptyset D \times L = 5 \times 11$ mm	typ. 13 nH
	case $\emptyset D \times L = 8.2 \times 11$ mm	typ. 16 nH
Resistance		
Equivalent series resistance (ESR)	calculated from $\tan \delta_{max}$ and C_R (see Table 2)	$ESR = \tan \delta / 2\pi f C_R$




CAPACITANCE (C)

 C_0 = capacitance at 20°C , 100 Hz .

Fig.6 Typical multiplier of capacitance as a function of ambient temperature.


 C_0 = capacitance at 20°C , 100 Hz .


 $T_{amb} = 20^\circ\text{C}$.

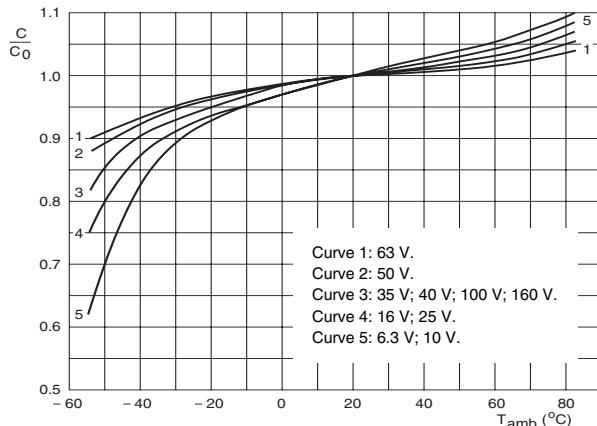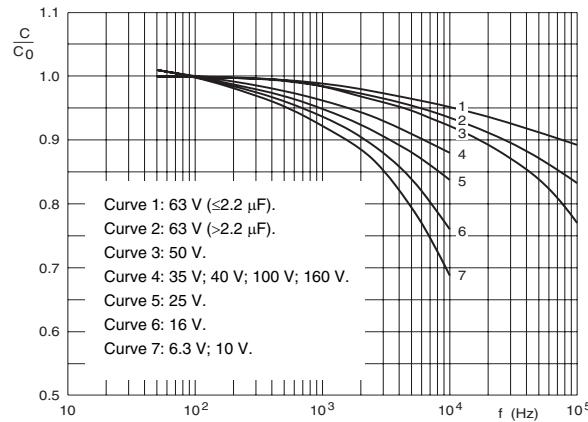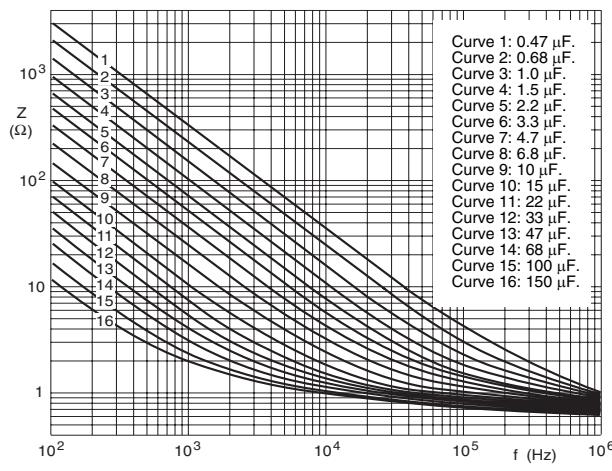Fig.7 Typical multiplier of capacitance as a function of frequency.

IMPEDANCE (Z)

Case $\emptyset D \times L = 5 \times 11$ mm.

 $T_{amb} = 20^\circ\text{C}$.

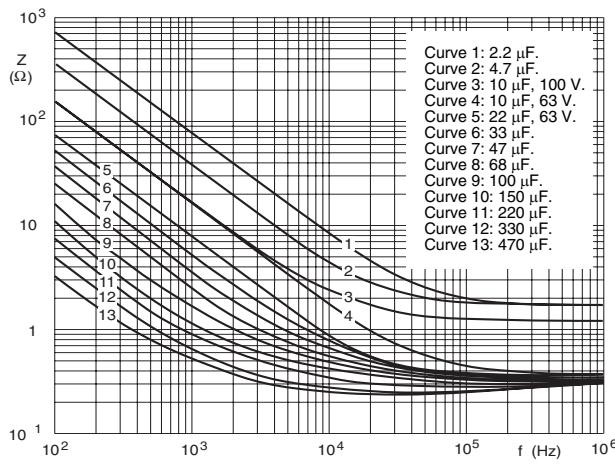Fig.8 Typical impedance as a function of frequency.


Case $\emptyset D \times L = 8.2 \times 11$ mm.

 $T_{amb} = 20^\circ\text{C}$.

Fig.9 Typical impedance as a function of frequency.

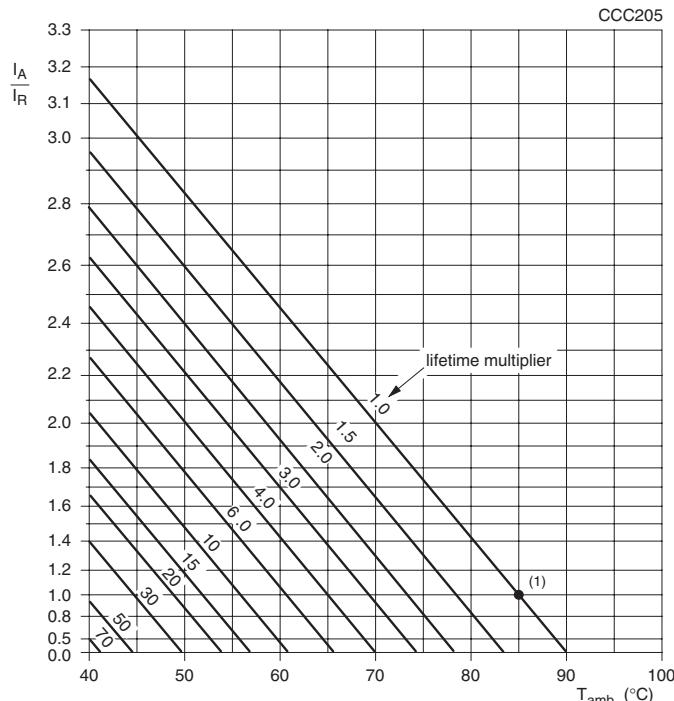
RIPPLE CURRENT AND USEFUL LIFE I_A = actual ripple current at 100 Hz. I_R = rated ripple current at 100 Hz, 85 °C.(1) Useful life at 85 °C and I_R applied: 3000 hours.

Fig.10 Multiplier of useful life as a function of ambient temperature and ripple current load.

Table 3

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3 \text{ to } 10 \text{ V}$	$U_R = 16 \text{ to } 35 \text{ V}$	$U_R = 40 \text{ to } 160 \text{ V}$
50	0.90	0.85	0.80
100	1.00	1.00	1.00
300	1.12	1.20	1.25
1000	1.20	1.30	1.40
3000	1.25	1.35	1.50
≥ 10000	1.30	1.40	1.60

Table 4

TEST PROCEDURES AND REQUIREMENTS			
TEST	PROCEDURE (quick reference)		REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{\text{amb}} = 85 \text{ °C}$; U_R applied; 2000 hours	$U_R \leq 6.3 \text{ V}$; $\Delta C/C: +15/-30\%$ $U_R > 6.3 \text{ V}$; $\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{\text{amb}} = 85 \text{ °C}$; U_R and I_R applied; 3000 hours	$U_R \leq 6.3 \text{ V}$; $\Delta C/C: +45/-50\%$ $U_R > 6.3 \text{ V}$; $\Delta C/C: \pm 45\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{\text{amb}} = 85 \text{ °C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$, $\tan \delta$, Z : for requirements see 'Endurance test' above $I_{L5} \leq \text{spec. limit}$