



0405-1000M

1000 Watts - 40 Volts, 300 μ s, 10%
UHF Pulsed Radar 400 - 450 MHz

GENERAL DESCRIPTION

The 0405-1000M is an internally matched, COMMON EMITTER transistor capable of providing 1000 Watts of pulsed RF output power in a push-pull configuration at three hundreds microsecond pulse width ten percent duty factor across the frequency band 400-450 MHz. This hermetically sealed transistor is specifically designed for medium pulse radar applications. It utilizes gold metallization and diffused emitter ballasting to provide high reliability and supreme ruggedness.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C¹ 1400 Watts

Maximum Voltage and Current

BVces	Collector to Emitter Voltage	85 Volts
BVebo	Emitter to Base Voltage	3.5 Volts
Ic	Collector Current	70 Amps

Maximum Temperatures

Storage Temperature	- 65 to + 200°C
Operating Junction Temperature	+ 200°C

CASE OUTLINE 55SL, STYLE 2



ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out (Note 2) Pulsed	F = 400-450 MHz Vcc = 40 Volts,	1000			Watts
Pg	Power Gain	Pulse Width = 300 μ s	9.5	10		dB
η_c	Collector Efficiency	Duty = 10 %	50			%
Pd	Pulse Amplitude Droop	As above			0.5	dB
VSWR¹	Load Mismatch Tolerance	F = 425MHz, Po =1000W			2:1	

FUNCTIONAL CHARACTERISTICS @ 25 °C

Bvces	Collector to Emitter Breakdown	Ic = 5 mA	80			Volts
Ices	Collector to Emitter Leakage	Vce = 50 Volts			30	mA
Iebo	Emitter to Base Leakage Current	Veb = 3.0 Volts			25	mA
Hfe	DC Current Gain	Vce = 5 V, Ic = 100mA	10			
θ_{jc}¹	Thermal Resistance	Rated Pulse Condition			0.08	°C/W

Issue Nov. 2006

Note 1: Pulse width = 300 us, duty = 10%

Note 2: Power Input = 110 Watts Peak Pulsed

Microsemi reserves the right to change, without notice, the specifications and information contained herein.


Visit our web site at www.microsemi.com or contact our factory direct.

Microsemi Corp. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 TEL. 408-986-8031 FAX 408-869-2324




0405-1000M

Performance Curves

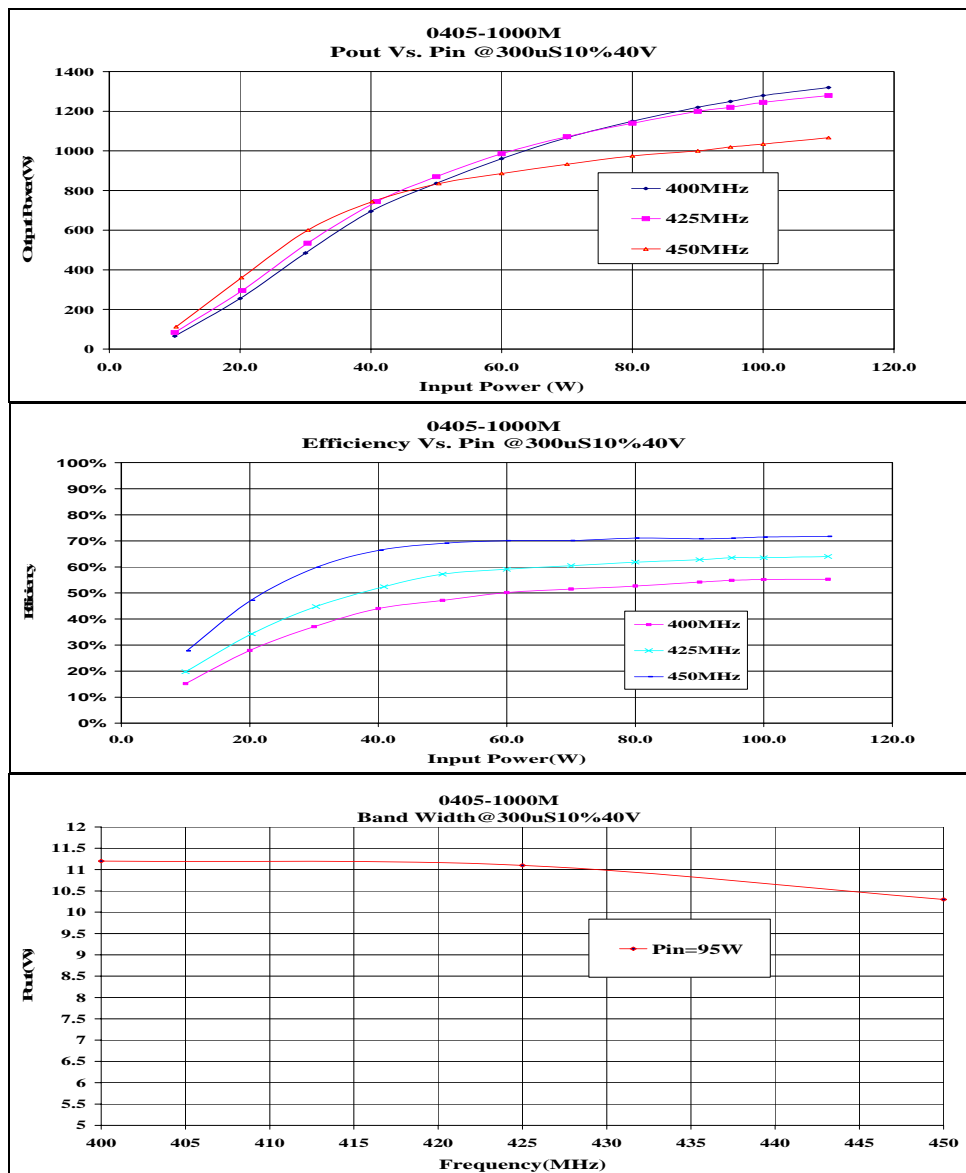

Single-Ended Impedance Information

Single-Ended Impedance		
Freq	Zs	Zl
400	1.39-j2.9	0.79-j2.41
425	1.94-j2.93	0.86-j2.55
450	2.21-j3.07	0.91-j2.95

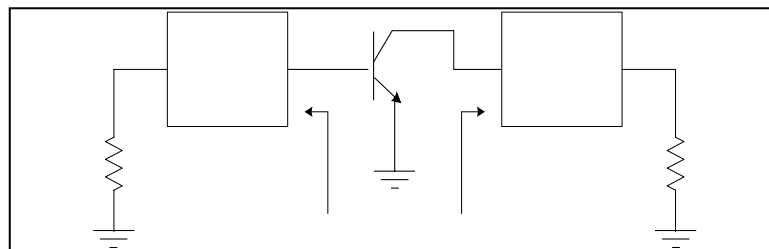

Microsemi reserves the right to change, without notice, the specifications and information contained herein.


Visit our web site at www.microsemi.com or contact our factory direct.

Microsemi Corp. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 TEL. 408-986-8031 FAX 408-869-2324



0405-1000M

Broadband Test Fixture

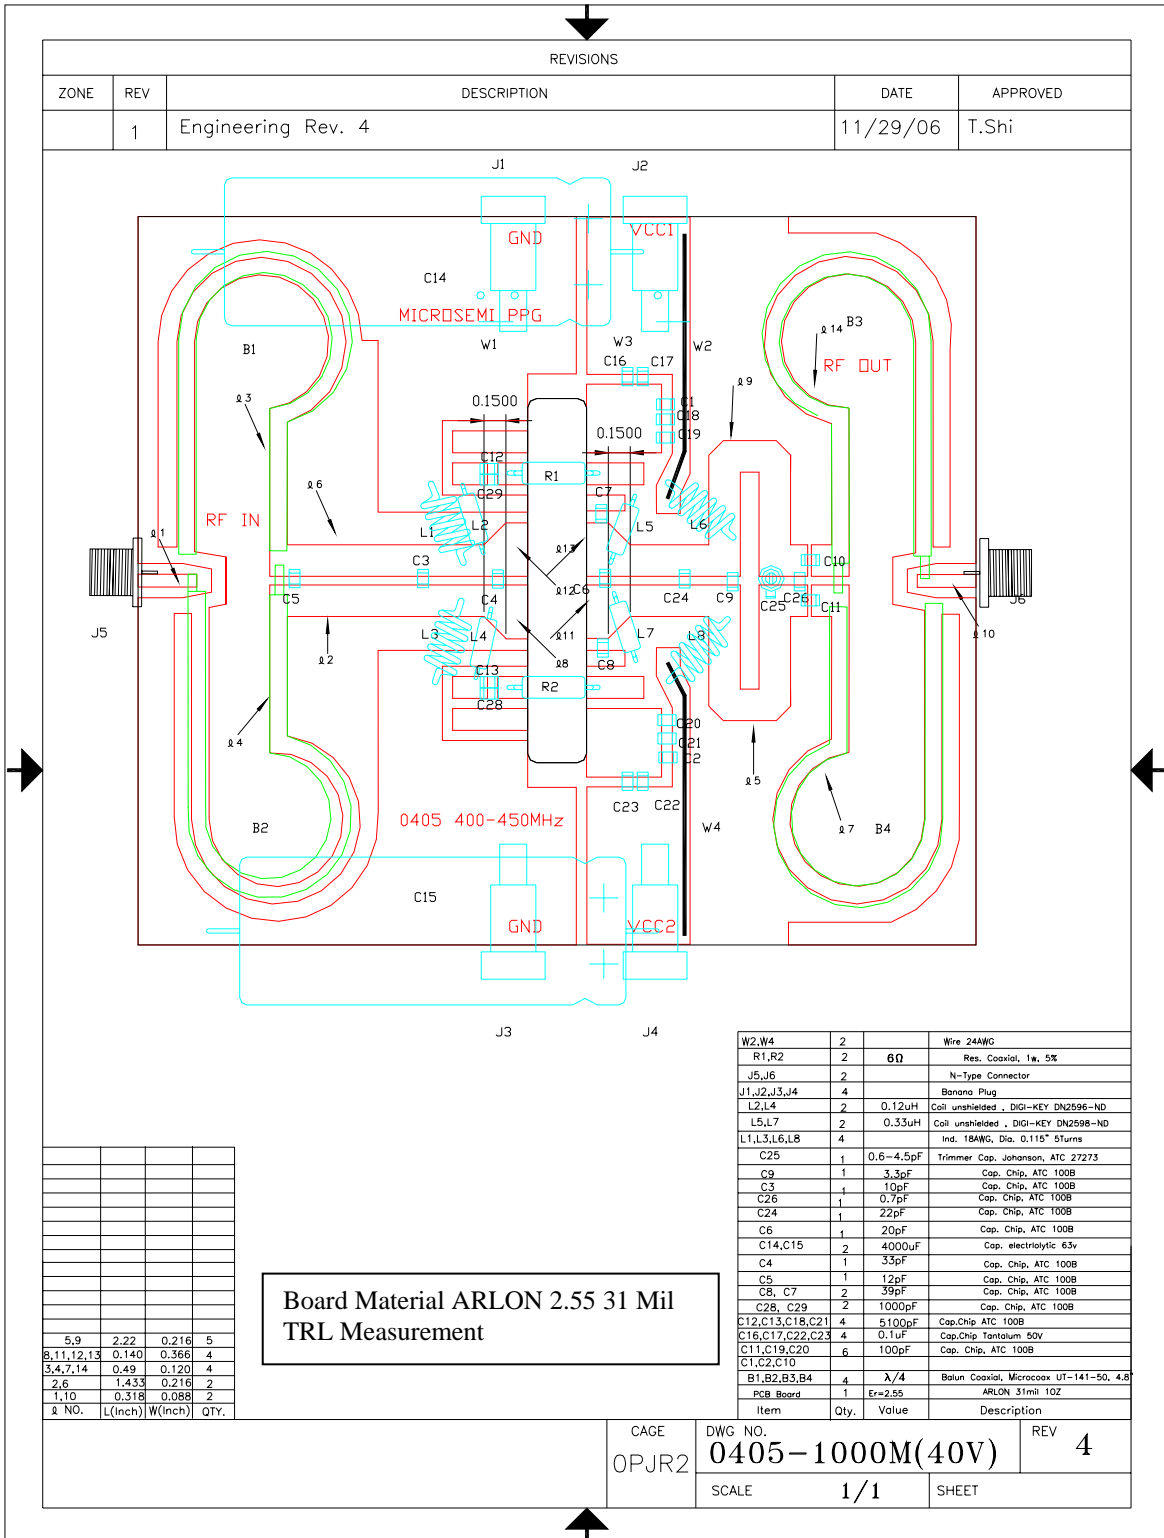

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Engineering Rev. 4	11/29/06	T.Shi

W2,W4	2		Wire 24AWG
R1,R2	2	6Ω	Res. Coaxial, 1w, 5%
J5,J6	2		N-Type Connector
J1,J2,J3,J4	4		Banana Plug
L2,L4	2	0.12uH	Coil unshielded , DIGI-KEY DN2598-ND
L5,L7	2	0.33uH	Coil unshielded , DIGI-KEY DN2598-ND
L1,L3,L6,L8	4		Ind. 18AWG, Dia. 0.115" 5Turns
C25	1	0.6-4.5pF	Trimmer Cap. Johanson, ATC 27273
C9	1	3.3pF	Cap. Chip, ATC 100B
C3	1	10pF	Cap. Chip, ATC 100B
C26	1	0.7pF	Cap. Chip, ATC 100B
C24	1	22pF	Cap. Chip, ATC 100B
C6	1	20pF	Cap. Chip, ATC 100B
C14,C15	2	4000uF	Cap. electrolytic 63v
C4	1	33pF	Cap. Chip, ATC 100B
C5	1	12pF	Cap. Chip, ATC 100B
C8, C7	2	39pF	Cap. Chip, ATC 100B
C28, C29	2	1000pF	Cap. Chip, ATC 100B
C12,C13,C18,C21	4	5100pF	Cap. Chip ATC 100B
C16,C17,C22,C23	4	0.1uF	Cap. Chip Tantalum 50V
C11,C19,C20	6	100pF	Cap. Chip, ATC 100B
C1,C2,C10	3		
B1,B2,B3,B4	4	λ/4	Balun Coaxial, Microcoax UT-141-50, 4.8
PCB Board	1	Er=2.55	ARLON 31mil 10Z
Item	Qty.	Value	Description

Ø NO.	L(Inch)	W(Inch)	QTY.
5,9	2.22	0.216	5
8,11,12,13	0.140	0.366	4
3,4,7,14	0.49	0.120	4
2,6	1.433	0.216	2
1,10	0.318	0.088	2

Board Material ARLON 2.55 31 Mil
TRL Measurement


CAGE	DWG NO.	REV
0PJR2	0405-1000M(40V)	4
SCALE	SHEET	
1/1		

Microsemi reserves the right to change, without notice, the specifications and information contained herein.
 Visit our web site at www.microsemi.com or contact our factory direct.
 Microsemi Corp. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 TEL. 408-986-8031 FAX 408-869-2324



0405-1000M

Case Outline

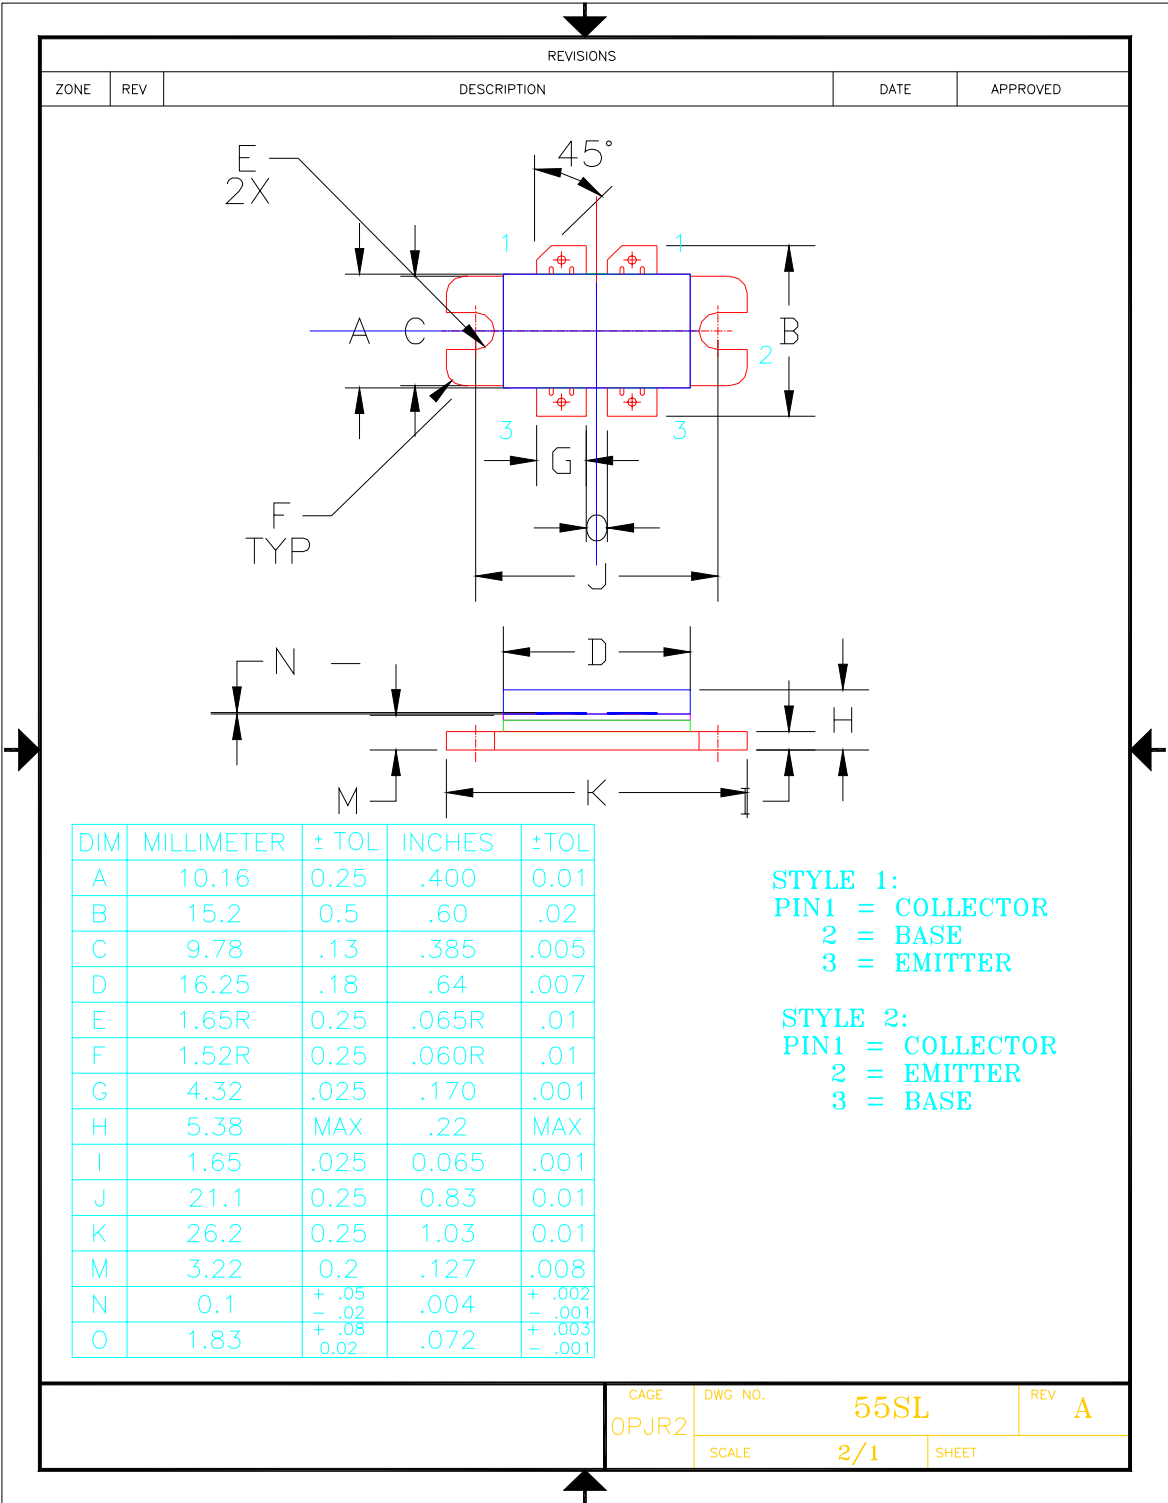

Microsemi reserves the right to change, without notice, the specifications and information contained herein.
 Visit our web site at www.microsemi.com or contact our factory direct.
 Microsemi Corp. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 TEL. 408-986-8031 FAX 408-869-2324