

**Rail-to-Rail I/O, High-Slew-Rate OP Amp****Features**

- +3V to +5.5V Single-Supply Operation
- Input / Output Rail-to-Rail
- Low input current
- High output driving capacity
- Low Quiescent Current: 500 μ A @ 5V
- High Slew rate 6.5V/ μ s
- High Gain-Bandwidth Product 6.5MHz
- High Open Loop Gain 95dB
- High PSRR 70dB

Applications

- Headphone Driver
- Portable Equipment
- Battery-Powered Equipment
- Multimedia Audio
- ASIC Input or Output Amplifier
- Sensor Amplifier
- Low Power/Low Voltage Applications

General Description



G1214 is a input/output rail-to-rail Operational Amplifier. It can be operated from +3V to +5.5V single supply or from ± 1.5 V to ± 2.75 V dual supply. G1214 can drive 66mA into resistor loads to within 10% power rail. AC performance is very excellent with 6.5MHz bandwidth, 6.5V/ μ s Slew Rate, 95dB open loop gain, 60 degree phase margin and low distortion.

Supply current of G1214 is only 500 μ A per Amplifier. It is very suitable for low current consumption applications to control high current loads. Applications include audio amplification for computers, sound ports, sound cards and set-top boxes.

G1214 is housed in a 5-pins small SOT23-5 package.

Ordering Information

PART	MARKING	TEMP. RANGE	PIN-PACKAGE
G1214	14xx	0°C to 85°C	SOT 23-5

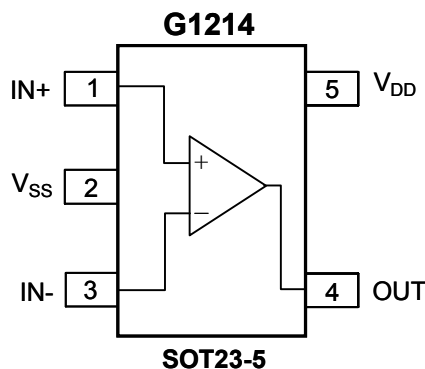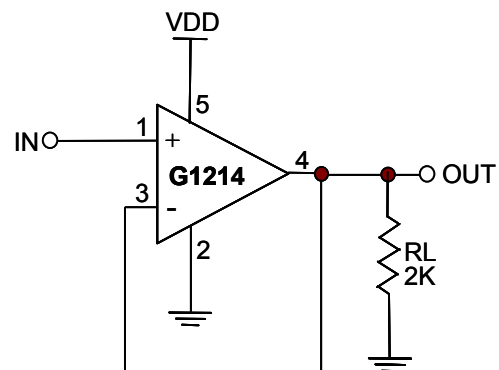Pin Configuration**Typical Application Circuit**

Absolute Maximum Ratings

Supply Voltage (V_{DD} to V_{SS}).....6.5V
 All Other Pins.....($V_{SS}-0.3V$) to ($V_{DD}+0.3V$)
 Continuous Power Dissipation ($T_A=25^\circ C$)
 SOT23-5.....520mW
 θ_{JA}240°C/Watt

Junction Temperature.....150°C
 Operating Temperature Range.....0C to 85°C
 Storage Temperature Range.....-65°C to 160°C
 Lead Temperature (soldering, 10sec)..... 300°C

Electrical Characteristics

$V_{DD} = 5V$; $V_{SS} = 0V$; $T_{amb} = 25^\circ C$; $C_L=10pF$, $R_L=1k\Omega$ to $V_{DD}/2$; unless otherwise specified.


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supplies						
Supply Voltage Range	V_{DD}	Note1	3		5.5	V
Supply Current	I_{DD}	No load	-	0.5	0.7	mA
Total Power Dissipation	P_{tot}	No load	-	0.25	0.35	mW
DC Characteristics						
Input Offset Voltage	$V_{I(OS)}$			± 5	± 15	mV
Common Mode Voltage	V_{CM}	Inferred from CMRR test	0	-	5	V
Input Bias Current	I_B			± 1.5	5	nA
Input Bias Current Offset	I_{OS}			± 1.5	5	nA
Input Resistance	R_{IN}			1000	-	M Ω
Open Loop Gain	A_V		85	95	-	dB
Maximum Output Current	I_O	$V_{OUT} = \pm V_{IN} \times 90\%$	55	± 66	-	mA
Output Voltage Swing High	V_{OH}	$R_L = 2k\Omega$	4.96	4.99		V
Output Voltage Swing Low	V_{OL}	$R_L = 2k\Omega$		0.012	0.04	V
Power Supply Rejection Ratio	PSRR	$3V \leq V_{DD} \leq 5.5V$	50	70	-	dB
Common-Mode Rejection Ratio	CMRR	$V_{SS} \leq V_{CM} \leq V_{DD}$	50	65	-	dB
AC Characteristics						
Gain-Bandwidth Product	GBWP	Open-loop; No Load	-	6.5	-	MHz
Slew-Rate	SR	Measured from 10% to 90% of 4V _{P-P} step, $R_L = 1k\Omega$, $C_L = 10pF$		6.5		V/ μs
Phase Margin	PM		-	60	-	deg
Maximum Output Current with THD	I_O	THD<0.1%, $R_L = 16\Omega$		100		mA

Note1: Guaranteed by the Power-Supply Rejection Ratio (PSRR) test


Typical Performance Characteristics

$V_{DD} = 5V$; $V_{SS} = 0V$; $T_{amb} = 25^{\circ}C$; $C_L = 10pF$, $R_L = 1k\Omega$ to $V_{DD}/2$; unless otherwise specified.


Open Loop Gain & Phase Margin vs. Frequency

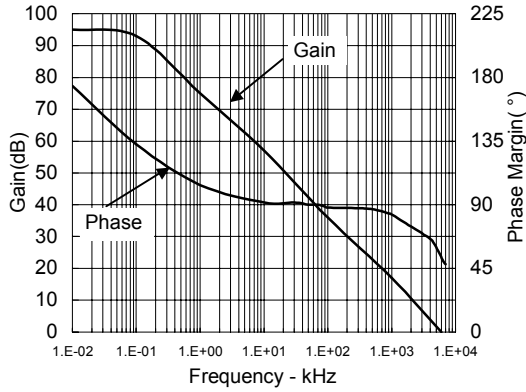


PSRR vs. Frequency

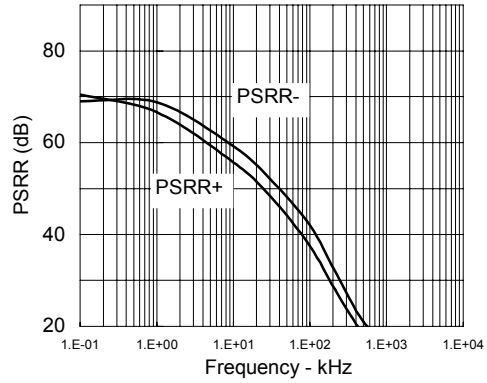


CMRR vs. Frequency

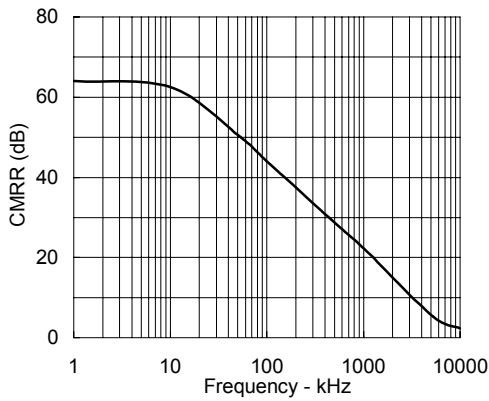


Total Harmonic Distortion Plus Noise vs. Output Power

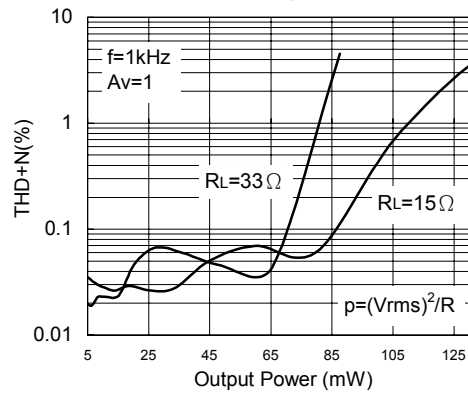

Sinking Current vs. $V_o - (V_{SS})$

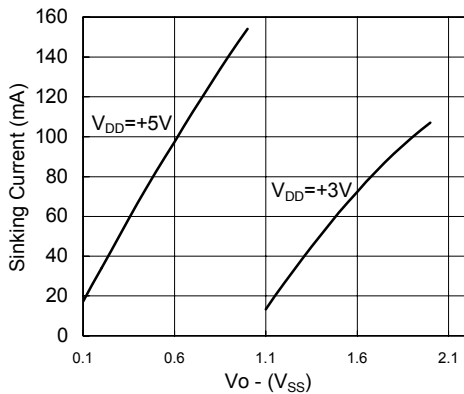


Sourcing Current vs. $(V_{DD}) - V_o$

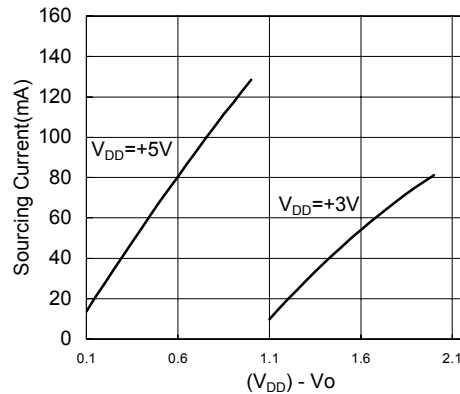




Typical Performance Characteristics (Continued)


Large Signal Transient Response

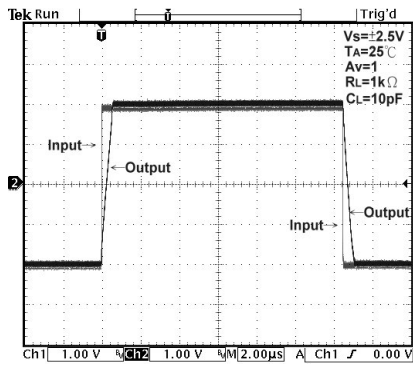


Small Signal Transient Response

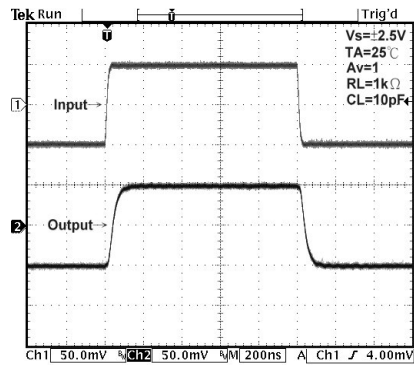


Operation with Rail-to-Rail Input and Output

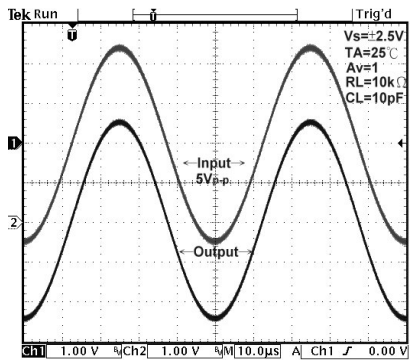

Operation with Beyond-the Rail Input

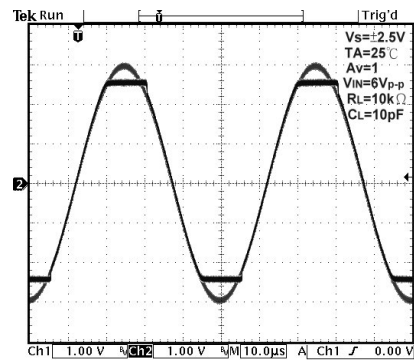

Package Information

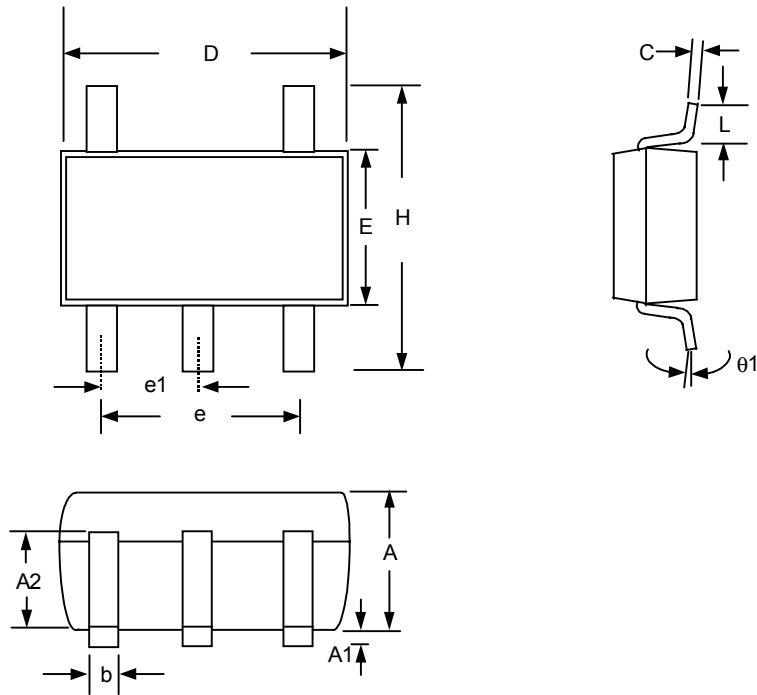


Note:

1. Package body sizes exclude mold flash protrusions or gate burrs
2. Tolerance ± 0.1000 mm (4mil) unless otherwise specified
3. Coplanarity: 0.1000mm
4. Dimension L is measured in gage plane

SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	1.00	1.10	1.30
A1	0.00	-----	0.10
A2	0.70	0.80	0.90
b	0.35	0.40	0.50
C	0.10	0.15	0.25
D	2.70	2.90	3.10
E	1.40	1.60	1.80
e	-----	1.90(TYP)	-----
e1	-----	0.95	-----
H	2.60	2.80	3.00
L	0.37	-----	-----
$\theta 1$	1°	5°	9°

Taping Specification (Unit: mm)

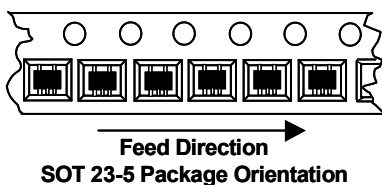

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.