

## 4-Port USB KVM Switch

**Multiple Workstations Control Solution --** LevelOne KVM-0407 4-port USB KVM Switch is a high quality, durable system that allows control of up to four computers/servers from a single console (USB or PS/2 keyboard, mouse and monitor), reducing desktop clutter and saving money on extra keyboards, mouse and monitors.

**Versatile Features --** The KVM-0407 is encased in durable metal with rubber bumpers to protect its corners from damage. With the built-in 3-port USB hub, users can attach an additional three USB enabled devices such as USB harddisk, memory stick, card reader, USB printer or speaker. Any of these four connected workstations is able to access and share USB enabled devices. Switching between computers is as easy as pressing the push button, entering hot-key commands from your keyboard and using On-Screen-Display (OSD) utility software.

**Easy to Access and Monitor --** The KVM-0407 supports all major Network Operating Systems (NOS) including Windows™ 98/98SE/ ME/ XP/ 2000, Linux/ Sun Micro OS, and MacOS 9 or later version. The true Plug-and-Play technology allows you to access any of the features of this product simply by plugging cables into the workstation. It is then ready to go. The OSD utility indicates the power status of connected workstations and active host. For instant error detection, this KVM switch is equipped with a full range of LEDs to help you monitor and troubleshoot problems on your workstations.



**KVM-0407**

### *Related Products*



**KVM-0205**

2-port KVM Switch for PS/2



**KVM-0420**

4-port KVM Switch w/OSD for USB and PS/2

## Key Features

- Controls 4 computers from a single console (Keyboard/Mouse) over USB connection using standard USB cables.
- Supports PS/2 and USB Keyboard/Mouse
- Shares USB enabled devices for 4 workstations through 3 USB downstream ports
- Supports 3 types of switching: hardware push button, Hot-Keys on PS/2 keyboard, and On-Screen-Display (OSD) utility software
- USB Bus Powered and downstream port activated by external Power
- Overcurrent protection
- Provides (OSD) On-Line Control/Status Display
- Supports VGA resolutions up to 2048x1536 @ 85HZ
- Supports Windows 98SE/Me/2000/XP, Mac OS9/X, Linux, SUN MICRO OS


## Technical Specification

- **Standards Compliance**  
Compliant with USB Version: USB1.0/1.1  
Compliant with HID Version: USB HID 1.1
- **Ports**  
PS/2 Keyboard/ Mouse Connector (Female): 2  
VGA Input (15 pins D type Female): 4  
VGA Output (15 pins D type Female): 1
- **VGA Resolution**  
2048 x 1536 (Max)
- **Auto-Scan Interval Time**  
5, 10, 15, 20 sec
- **Accessory Cable**  
USB A/B Type Cable Length: 1.8m
- **LEDs**  
Working PC Status LED: 4  
USB over current LED Indicator: 1
- **Power Consumption**  
VGA, PS/2 connected: 350mA/ 440mA
- **Bus-power Limit Current Protection**  
500mA
- **Dimensions:**  
210mm(L) \* 92mm(W) \* 54mm(H)
- **Unit Weight**  
845g
- **OS Complies**  
Win 98/SE/ME/2000/XP  
Mac OS 9/X  
Linux Kernel 2.3 or above  
Solaris 8 (SUN Blade 100)
- **External Power Adapter**  
5V/2A
- **Certification**  
FCC, CE

## Product Diagram



## Product Details

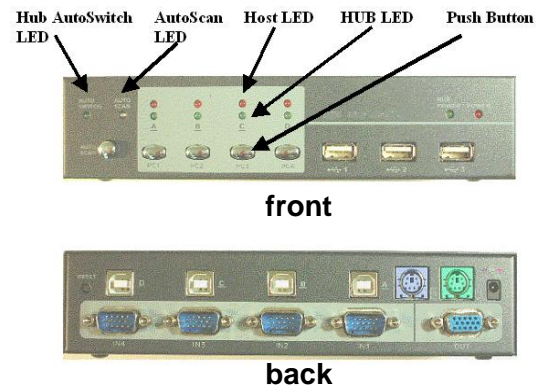

## Ordering Information

- KVM-0407: 4-Port USB KVM Switch
  - 4 sets of USB+VGA cables