

3216 Size

Chip Multilayer Diplexer for CELL/PCS


FSLF-080HL

All the technical data and information contained
herein are subject to change without notice.



LF-FSLF-080HL-0403A





Shape & Size

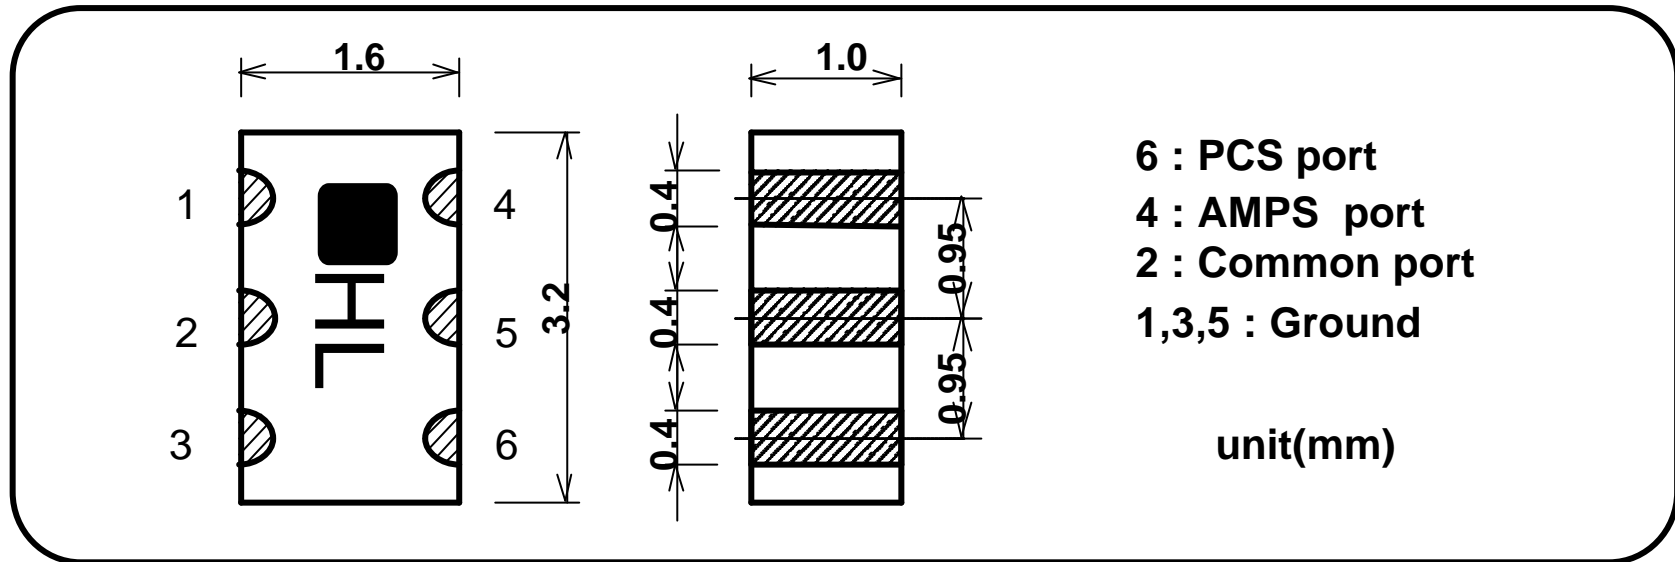

Specifications

Frequency Range	f1:824-894MHz	Attenuation in f2 CELL <=>Common	20 dB Min.
	f2:1850-1990MHz		
Insertion Loss in f1 CELL <=>Common	0.45dB Max.(at +25deg) 0.5dB Max.(at -35to+85deg)	Attenuation in f1 PCS <=>Common	20 dB Min.
Insertion Loss in f2 PCS <=>Common	0.5 dB Max.(at +25deg) 0.55dB Max.(at -35to+85deg)	Power Capacity	3W Max.
		Temperature Range	-35to+85deg
Return Loss (all port)	14 dB Min.		


FSLF-080HL SAMPLE DATA

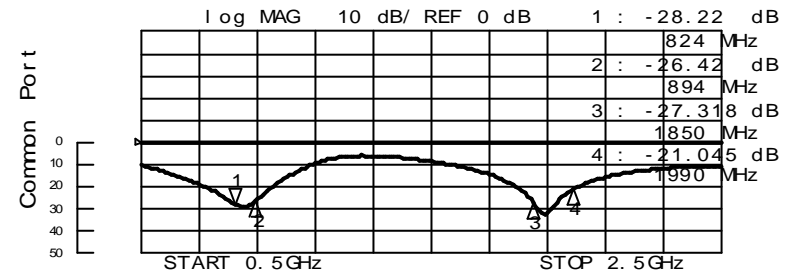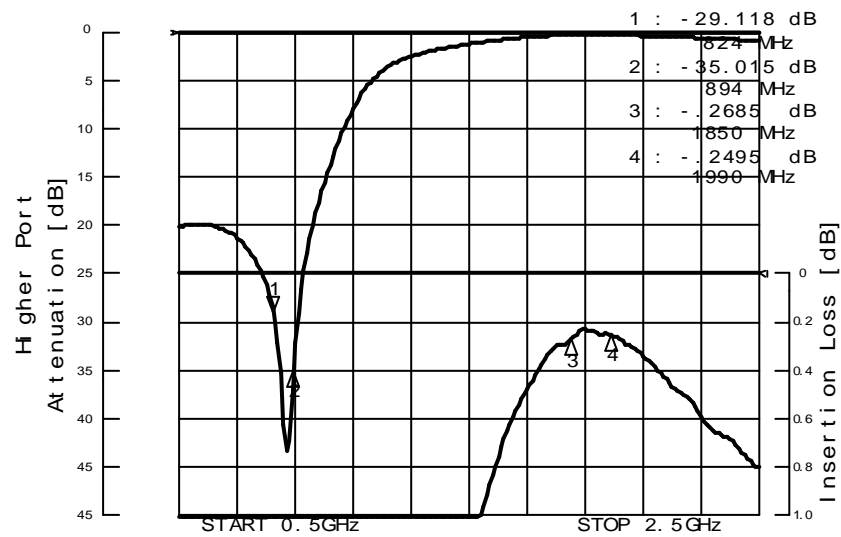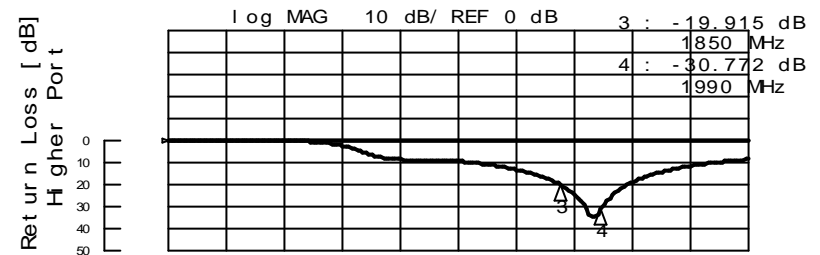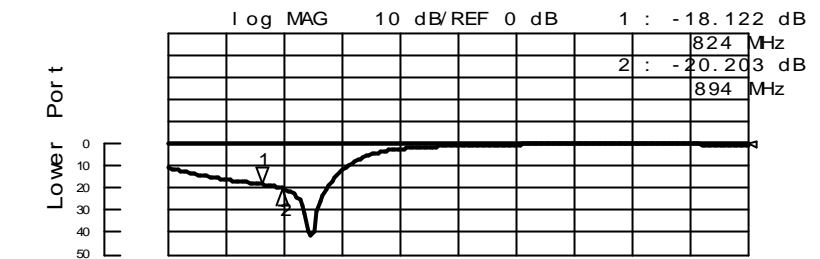

All the technical data and information contained herein are subject to change without notice.

LF-FSLF-080HL-0403A

Foot Pattern

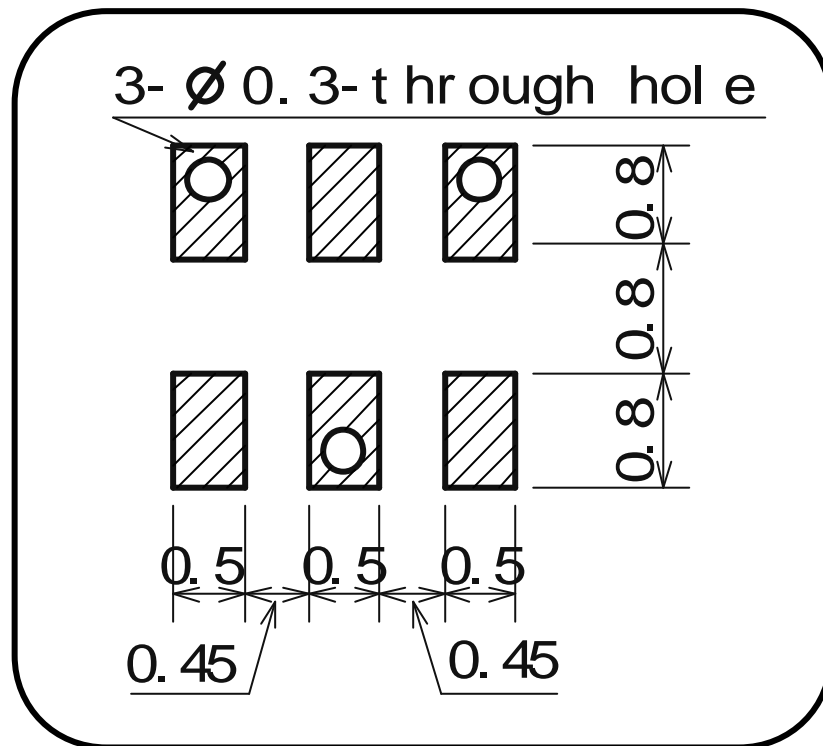

Foot Pattern Example

