

# Ceramic Low Pass Filter

DC to 95 MHz

**NEW!**

**LFCN-95**



**BLUE CELL™**

CASE STYLE: FV1206

## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	8.5W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C


\*Passband rating, derate linearly to 3.5W at 100°C ambient.

## Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

\*\*RF IN & RF OUT can be interchanged


## Outline Drawing

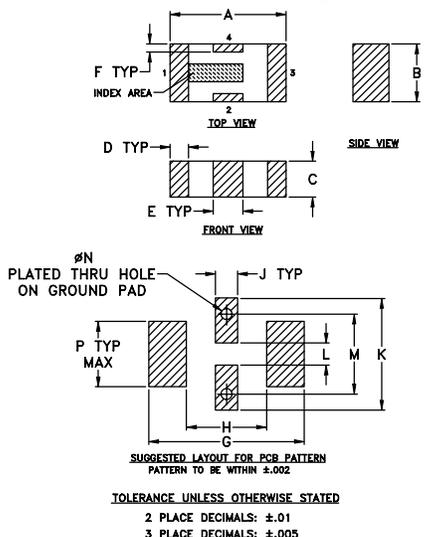

## Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.126	.063	.037	.020	.032	.009	.169	.087	.024	.122	.024	.087	.012	.071	grams
3.20	1.60	0.94	0.51	0.81	0.23	4.29	2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

## Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

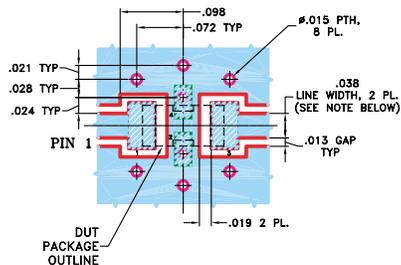

## Features

- excellent power handling, 8.5W
- small size
- 7 sections
- temperature stable
- patent pending

## Applications


- harmonic rejection
- VHF/UHF transmitters/receivers
- RF suppression for DC lines on PCB
- anti-aliasing for A/D converter

## Low Pass Filter Electrical Specifications<sup>1</sup> (T<sub>AMB</sub>=25°C)


MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	f <sub>co</sub> , MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			f 20 Min.	40 Typ.	f <sub>r</sub> 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-95	DC-95	165	220	240-1600	4500	20	1.2	7

1. For Applications requiring DC voltage to be applied to the Input or output, use LFCN-95D (DC Resistance to ground is 100 Mohms min.)

## typical frequency response

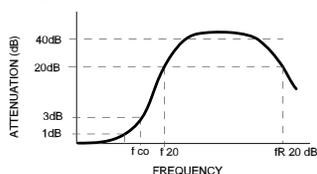

## schematic



## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	0.21	1.05
95.00	0.89	1.12
165.00	3.29	2.13
185.00	6.95	4.41
200.00	12.69	7.60
220.00	25.31	10.37
240.00	40.82	12.18
300.00	36.40	15.53
500.00	46.32	29.96
700.00	61.06	48.26
1050.00	52.77	82.73
1750.00	39.88	62.05
2750.00	28.46	43.44
3750.00	23.85	11.46
4750.00	20.64	19.11

