

### Features

Additional Colors/Materials Available  
 Excellent Character Appearance  
 High Light Output  
 IC Compatible  
 Low Current Requirements  
 Other face/epoxy colors are available

### Applications


Message Signs  
 VMS

### Notes

All Dimensions are in millimeters.  
 Tolerance is  $\pm 0.25\text{mm}$  unless otherwise stated.  
 The slope angle of any pin may be  $\pm 5.0^\circ$  MAX.  
 Operating Temperature:  $-25 \sim +85$   
 Storage Temperature:  $-25 \sim +100$   
 Specifications subject to change without notice.

Part Number	PWL $\lambda_p$	Material	Emitted Color	Face Colors		Maximum Ratings			Optical and Electrical Characteristics						Pin Out	
				Epoxy Color	Surface Color	IF	VR	PD	Forward Voltage VF			Reverse Current IR		Luminous Intensity IV		
									typ.	max.	IF@	max.	VR@	typ. dot		IF@
MTAN7185M2-11BW	660	GaAlAs	SBUR	White	Black	30	4.00	70.00	1.70	2.20	20mA	100	4V	15.40	20mA	1
MTAN7185M2-21BW	660	GaAlAs	SBUR	White	Black	30	4.00	70.00	1.70	2.20	20mA	100	4V	15.40	20mA	2
Units	nm	-	-	-	-	mA	V	mW	V	-	$\mu\text{A}$	-	mcd	-	-	

### Package Dimensions and Pin Functions

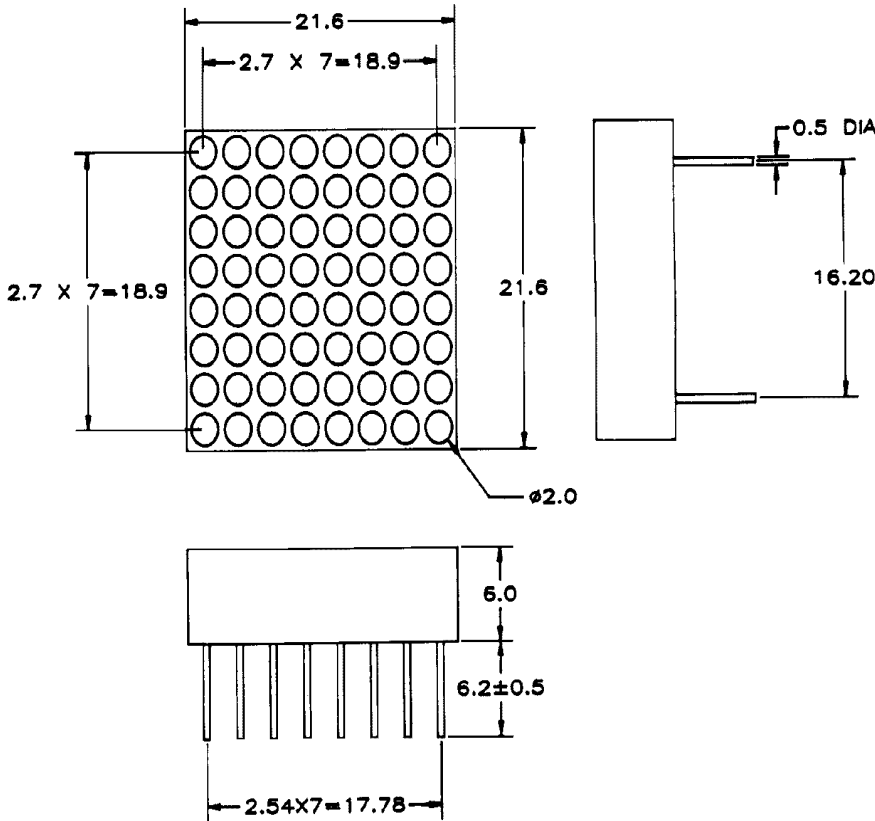

#### PINOUT 1

CATHODE ROW	PIN NO.	FUNCTION
1.	CATHODE ROW 5	
2.	CATHODE ROW 7	
3.	ANODE COLUMN 2	
4.	ANODE COLUMN 3	
5.	CATHODE ROW 8	
6.	ANODE COLUMN 5	
7.	CATHODE ROW 6	
8.	CATHODE ROW 3	
9.	CATHODE ROW 1	
10.	ANODE COLUMN 4	
11.	ANODE COLUMN 6	
12.	CATHODE ROW 4	
13.	ANODE COLUMN 1	
14.	CATHODE ROW 2	
15.	ANODE COLUMN 7	
16.	ANODE COLUMN 8	

#### PINOUT 2

ANODE ROW	PIN NO.	FUNCTION
1.	ANODE ROW 5	
2.	ANODE ROW 7	
3.	CATHODE COLUMN 2	
4.	CATHODE COLUMN 3	
5.	ANODE ROW 8	
6.	CATHODE COLUMN 5	
7.	ANODE ROW 6	
8.	ANODE ROW 3	
9.	ANODE ROW 1	
10.	CATHODE COLUMN 4	
11.	CATHODE COLUMN 6	
12.	ANODE ROW 4	
13.	CATHODE COLUMN 1	
14.	ANODE ROW 2	
15.	CATHODE COLUMN 7	
16.	CATHODE COLUMN 8	