

MTE8300C

Features


Compact Package
High Reliability

Applications

Optical Switches
Bar Code Reader

Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Test Condition	Unit
Forward Current	I _F	60	—	mA
Pulsed Forward Current	I _{FP}	1.00	tw=10μs, T=10mS	A
Reverse Voltage	V _R	5	—	V
Power Dissipation	P _D	125.00	—	mW
Operating Temperature	T _{opr}	-20~+80	—	°C
Storage Temperature	T _{stg}	-30~+100	—	°C
Junction Temperature	T _j	100	—	°C
Soldering Temperature	T _{sol}	260	for 5 sec. max	°C

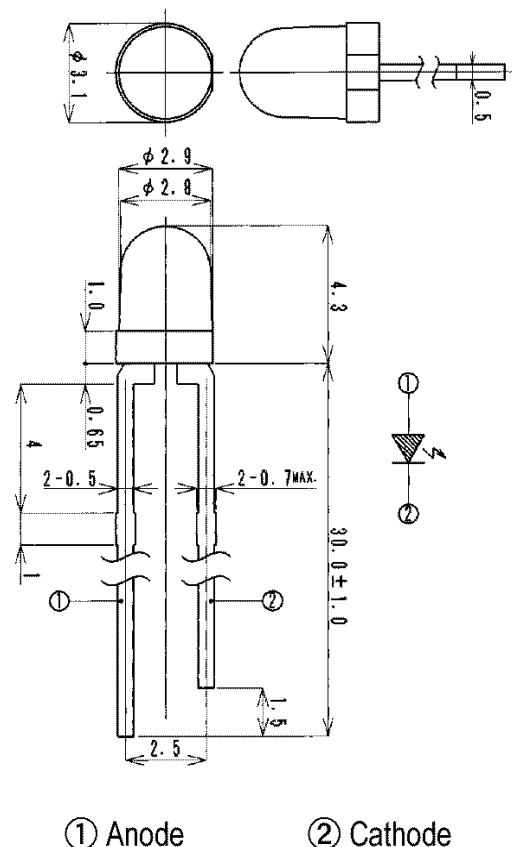

① Anode

② Cathode

Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =20mA	—	1.60	2.10	V
Reverse Current	I _R	V _R =5V	—	—	10	μA
Power Output	P _O	I _F =20mA	—	2.70	—	mW
Half Intensity Beam Angle	θ	—	—	± 30°	—	deg.
Peak Wavelength	λ _p	I _F =20mA	—	830	—	nm
Spectral Line Half Width	Δλ	I _F =20mA	—	30	—	nm

MTE8300C Graphs

