

International
IOR Rectifier

MUR1520PbF

Ultrafast Rectifier

Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature
- Lead-Free ("PbF" suffix)

$$t_{rr} = 35\text{ns}$$

$$I_{F(AV)} = 15\text{Amp}$$

$$V_R = 200\text{V}$$

Description/ Applications

International Rectifier's MUR.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.


Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

Absolute Maximum Ratings


| Parameters | Max | Units |
|--|------------|------------------|
| V_{RRM} Peak Repetitive Peak Reverse Voltage | 200 | V |
| $I_{F(AV)}$ Average Rectified Forward Current Total Device, (Rated V_R), $T_C = 150^\circ\text{C}$ | 15 | A |
| I_{FSM} Non Repetitive Peak Surge Current | 200 | |
| I_{FM} Peak Repetitive Forward Current (Rated V_R , Square wave, 20 KHz), $T_C = 150^\circ\text{C}$ | 30 | |
| T_J, T_{STG} Operating Junction and Storage Temperatures | -65 to 175 | $^\circ\text{C}$ |

Case Styles

MUR1520PbF



TO-220AC



Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

| Parameters | Min | Typ | Max | Units | Test Conditions |
|--|-----|-----|------|-------|---|
| V _{BR} , V _r Breakdown Voltage, Blocking Voltage | 200 | - | - | V | I _R = 100μA |
| V _F Forward Voltage | - | - | 1.05 | V | I _F = 15A |
| | - | - | 0.85 | V | I _F = 15A, T _J = 150°C |
| I _R Reverse Leakage Current | - | - | 10 | μA | V _R = V _R Rated |
| | - | - | 500 | μA | T _J = 150°C, V _R = V _R Rated |
| C _T Junction Capacitance | - | 55 | - | pF | V _R = 200V |
| L _S Series Inductance | - | 8.0 | - | nH | Measured lead to lead 5mm from package body |

Dynamic Recovery Characteristics @ T_J = 25°C (unless otherwise specified)

| Parameters | Min | Typ | Max | Units | Test Conditions |
|---|-----|-----|-----|-------|---|
| t _{rr} Reverse Recovery Time | - | - | 35 | ns | I _F = 1.0A, di _F /dt = 50A/μs, V _R = 30V |
| | - | 22 | - | | T _J = 25°C |
| | - | 39 | - | | T _J = 125°C |
| I _R RM Peak Recovery Current | - | 1.6 | - | A | T _J = 25°C |
| | - | 4.1 | - | | T _J = 125°C |
| Q _{rr} Reverse Recovery Charge | - | 19 | - | nC | T _J = 25°C |
| | - | 90 | - | | T _J = 125°C |

I_F = 15A
V_R = 160V
di_F/dt = 200A/μs

Thermal - Mechanical Characteristics

| Parameters | Min | Typ | Max | Units |
|---|---------|------|-----|--------|
| T _J Max. Junction Temperature Range | - 65 | - | 175 | °C |
| T _{Stg} Max. Storage Temperature Range | - 65 | - | 175 | |
| R _{thJC} Thermal Resistance, Junction to Case | - | - | 1.5 | °C/ W |
| R _{thJA} Thermal Resistance, Junction to Ambient | - | - | 50 | |
| R _{thCS} ^① Thermal Resistance, Case to Heatsink | - | 0.5 | - | |
| Wt Weight | - | 2.0 | - | g |
| | - | 0.07 | - | (oz) |
| Mounting Torque | 6.0 | - | 12 | Kg-cm |
| | 5.0 | - | 10 | lbf.in |
| Marking Device | MUR1520 | | | |

① Mounting Surface, Flat, Smooth and Greased

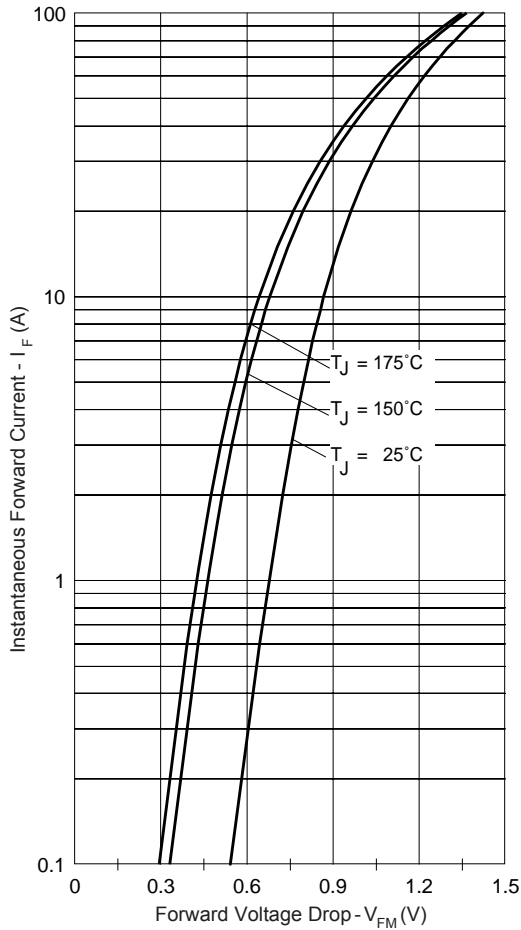


Fig. 1 - Typical Forward Voltage Drop Characteristics

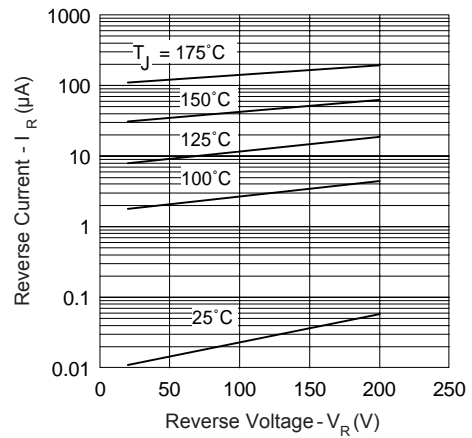


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

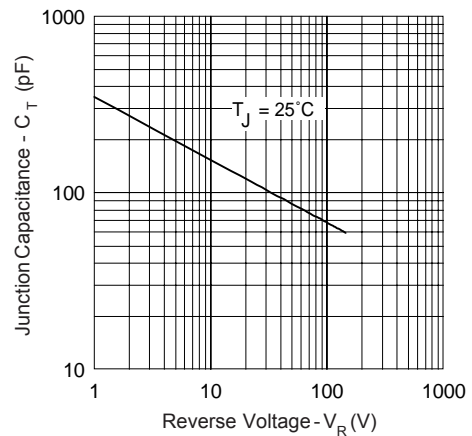


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

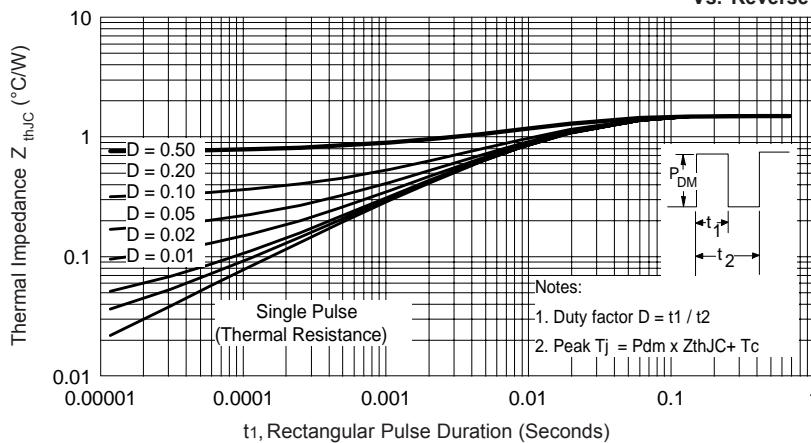


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

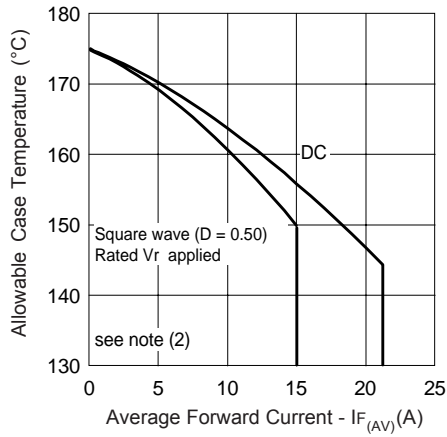


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

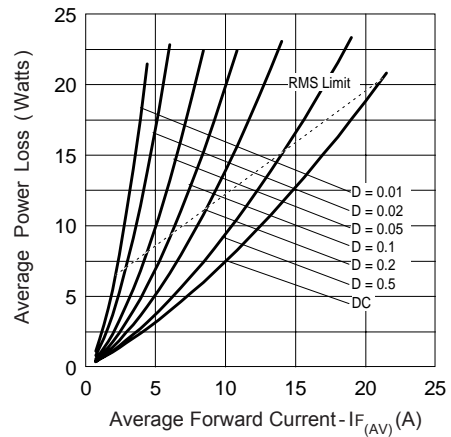


Fig. 6 - Forward Power Loss Characteristics

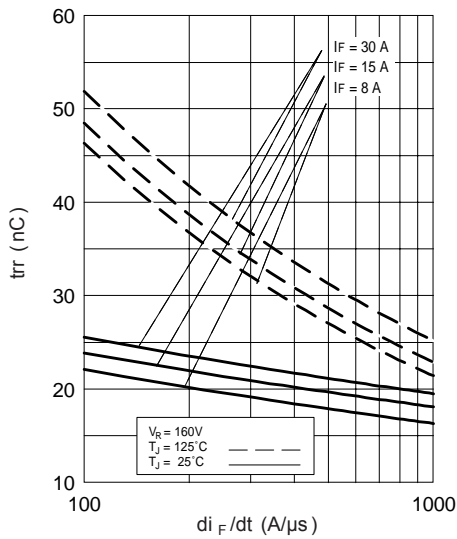


Fig. 7 - Typical Reverse Recovery vs. di_F/dt

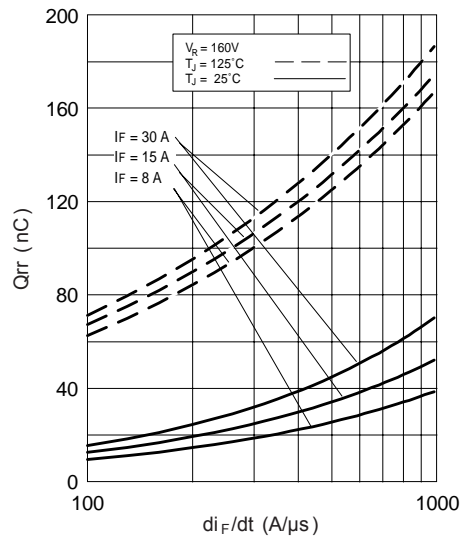


Fig. 8 - Typical Stored Charge vs. di_F/dt

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_{R1} (1 - D)$; $I_{R1} @ V_{R1}$ = rated V_R

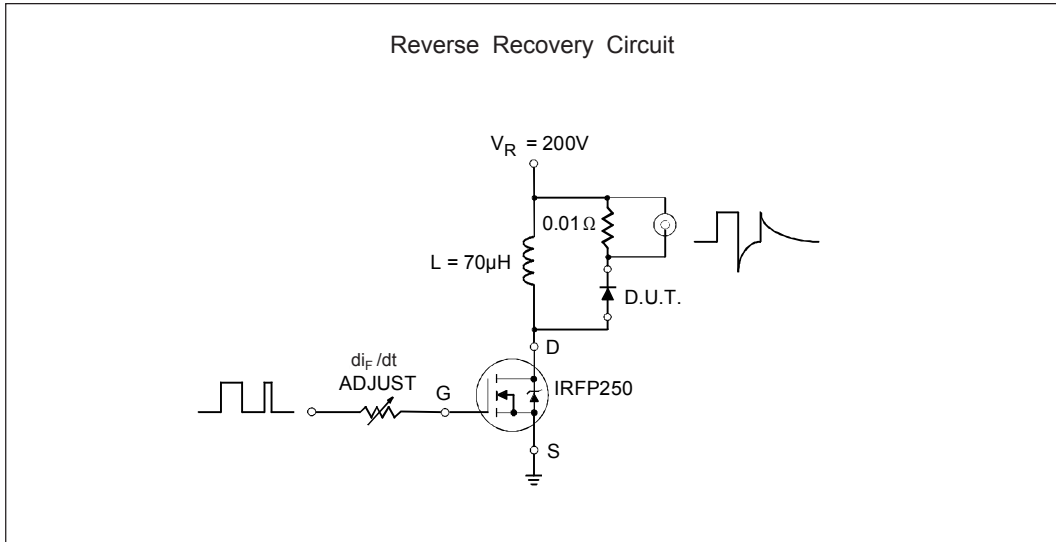


Fig. 9- Reverse Recovery Parameter Test Circuit



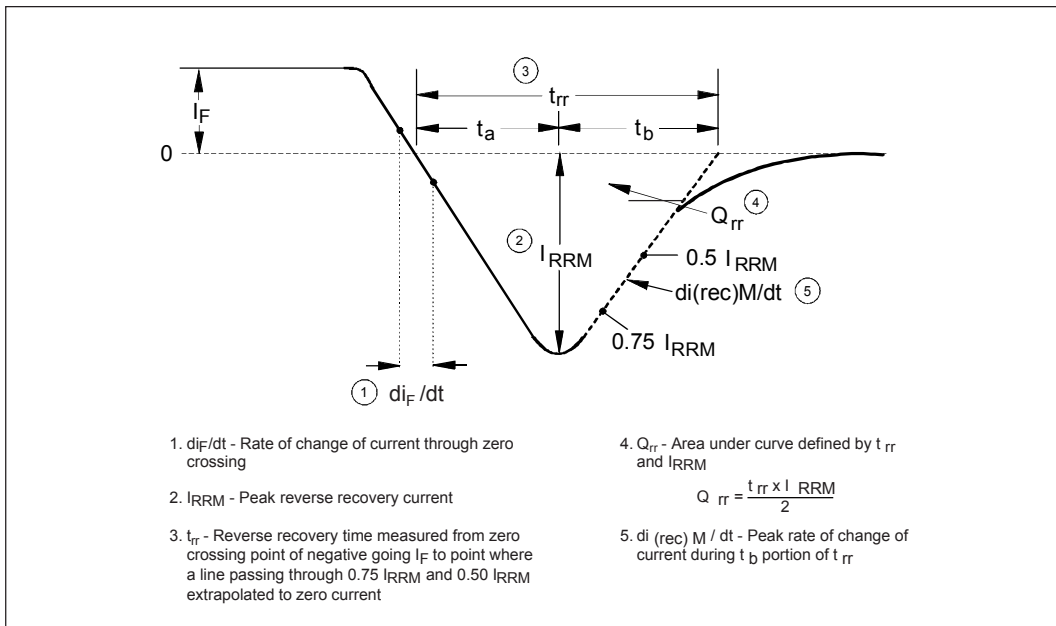


Fig. 10 - Reverse Recovery Waveform and Definitions

Outline Table

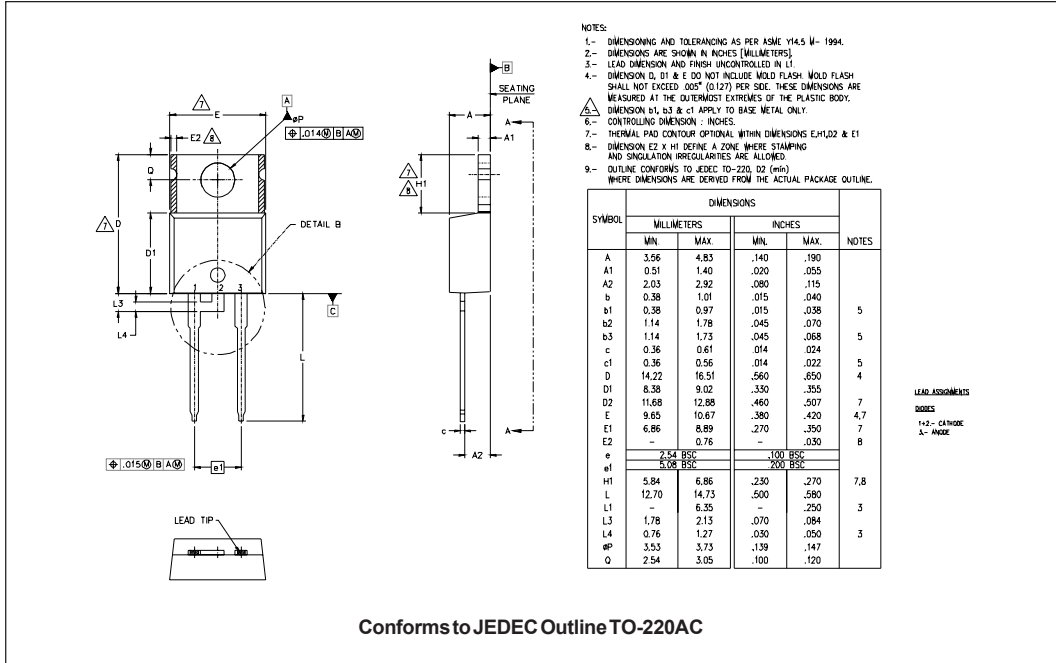

Part Marking Information

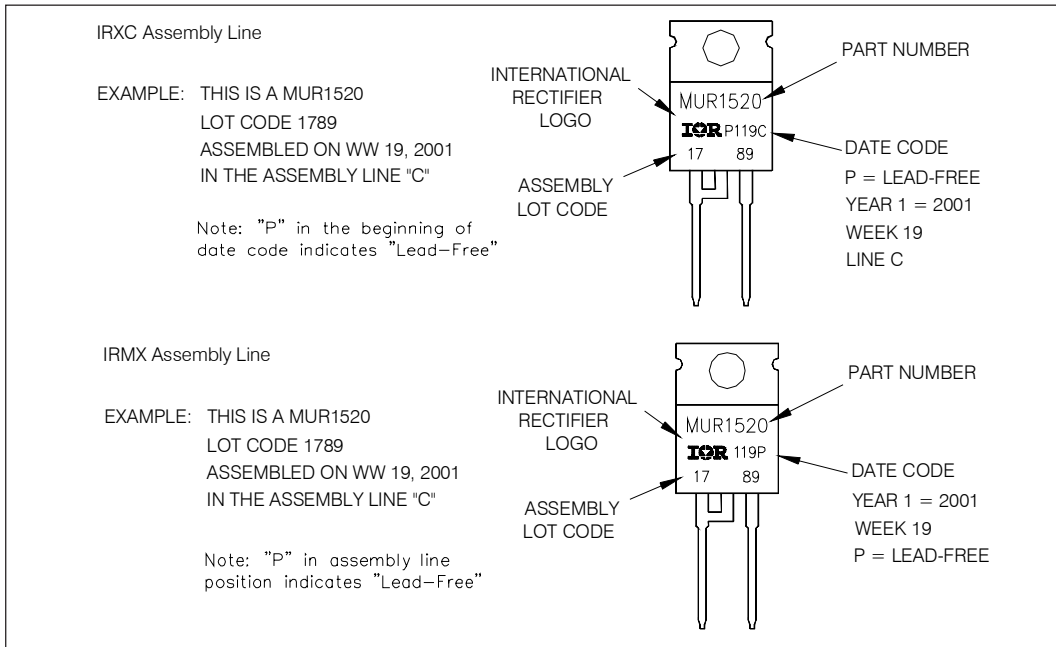

Ordering Information Table

| | | | | | | | | | | |
|---|--------------------------------|------------------------|----------|-----------------------------|--|------------------------------|----------|--------------------------------|----------|---------------------|
| <p>Device Code</p> <div style="display: flex; justify-content: center; align-items: center; gap: 10px;"> <div style="border: 1px solid black; padding: 2px 5px; background-color: #333; color: white;">MUR</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #333; color: white;">15</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #333; color: white;">20</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #333; color: white;">PbF</div> </div> <div style="display: flex; justify-content: center; align-items: center; gap: 10px; margin-top: 5px;"> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">1</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">2</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">3</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">4</div> </div> | | | | | | | | | | |
| <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30px; text-align: center;">1</td> <td>- Ultrafast MUR Series</td> </tr> <tr> <td style="text-align: center;">2</td> <td>- Current Rating (15 = 15A)</td> </tr> <tr> <td></td> <td>- Voltage Rating (20 = 200V)</td> </tr> <tr> <td style="text-align: center;">3</td> <td>- • none = Standard Production</td> </tr> <tr> <td style="text-align: center;">4</td> <td>- • PbF = Lead-Free</td> </tr> </table> <p style="text-align: center; margin-top: 10px;">Tube Standard Pack Quantity: 50 pieces</p> | 1 | - Ultrafast MUR Series | 2 | - Current Rating (15 = 15A) | | - Voltage Rating (20 = 200V) | 3 | - • none = Standard Production | 4 | - • PbF = Lead-Free |
| 1 | - Ultrafast MUR Series | | | | | | | | | |
| 2 | - Current Rating (15 = 15A) | | | | | | | | | |
| | - Voltage Rating (20 = 200V) | | | | | | | | | |
| 3 | - • none = Standard Production | | | | | | | | | |
| 4 | - • PbF = Lead-Free | | | | | | | | | |

```

MUR1520
*****
* SPICE Model Diode *
*****
.SUBCKT MUR1520 ANOCAT
D1 ANO 1 CAT
*Define diode model
.MODEL DMOD D Is=16.9E-09 N=1.332 Rs=4.439E-03 Ikf=.232 Xti=2 Eg=1.11
      Cjo=700.3E-09 M=.3715 Vj=.1784 Fc=.5 Isr=1.389E-09
      Nr=3.002 Bv=270 Ibv=95.79E-6 Tt=10.49E-9)
*****

.ENDS MUR1520

Thermal Model Subcircuit
.SUBCKT MUR1520 5 1

CTHERM1 5 4 2.23E+01
CTHERM2 4 3 1.23E+02
CTHERM3 3 2 3.35E+02
CTHERM4 2 1 4.75E+02

R THERM1 5 4 7.55E-01
R THERM2 4 3 5.90E-02
R THERM1 3 2 1.01E-01
R THERM1 2 1 5.43E-02

.ENDS MUR1520

```

MUR1520PbF

Bulletin PD-20895 rev. A 02/06

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 02/06