

PHOTO INTERRUPTERS


PS4001, PS4003, PS4005, PS4007, PS4009, PS4010, PS4011

PHOTO INTERRUPTER

DESCRIPTION

The PS4001, PS4003, PS4005, PS4007, PS4009 are photo coupled interrupter modules containing a GaAs light emitting diode and an NPN silicon darlington connected photo-transistor.

CONNECTION DIAGRAM (Top View)

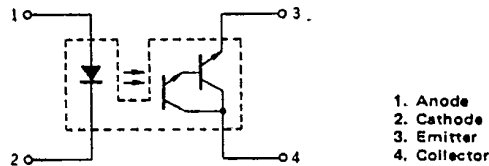

- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Diode			
Reverse Voltage	V_R	5.0	V
Forward Current	I_F	50	mA
Power Dissipation	P_D	100	mW
Transistor			
Collector to Emitter Voltage	V_{CEO}	30	V
Collector Current	I_C	50	mA
Power Dissipation	P_C	100	mW
Storage Temperature	T_{stg}	-40 to +100	°C
Operating Temperature	T_{opt}	-20 to +80	°C

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)


CHARACTERISTIC		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Diode	Forward Voltage	V_F		1.1	1.4	V	$I_F = 20 \text{ mA}$
	Reverse Current	I_R		~	20	μA	$V_R = 4.0 \text{ V}$
	Junction Capacitance	C		100		pF	$V = 0, f = 1.0 \text{ MHz}$
Transistor	Collector to Emitter Dark Current	I_{CEO}			400	nA	$V_{CE} = 10 \text{ V}, I_F = 0$
Coupled	Current Transfer Ratio	CTR (I_C/I_F)	20*			%	$I_F = 10 \text{ mA}, V_{CE} = 2.0 \text{ V}$
	Collector Saturation Voltage	$V_{CE(sat)}$			1.2	V	$I_F = 10 \text{ mA}, I_C = 0.5 \text{ mA}$
	Rise Time	t_r		200		μs	$V_{CC} = 5.0 \text{ V}, I_C = 2.0 \text{ mA}, R_L = 100 \Omega$
	Fall Time	t_f		200		μs	$V_{CC} = 5.0 \text{ V}, I_C = 2.0 \text{ mA}, R_L = 100 \Omega$

* PS4003 : 15 % MIN., Others : 20 % MIN.


PS4001, PS4003, PS4005, PS4007, PS4009, PS4010, PS4011

T-41-73


* Test Circuit for Switching Time

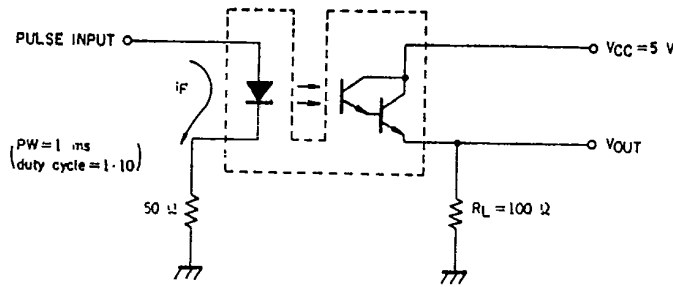

PACKAGE DIMENSIONS
in millimeters (inches)

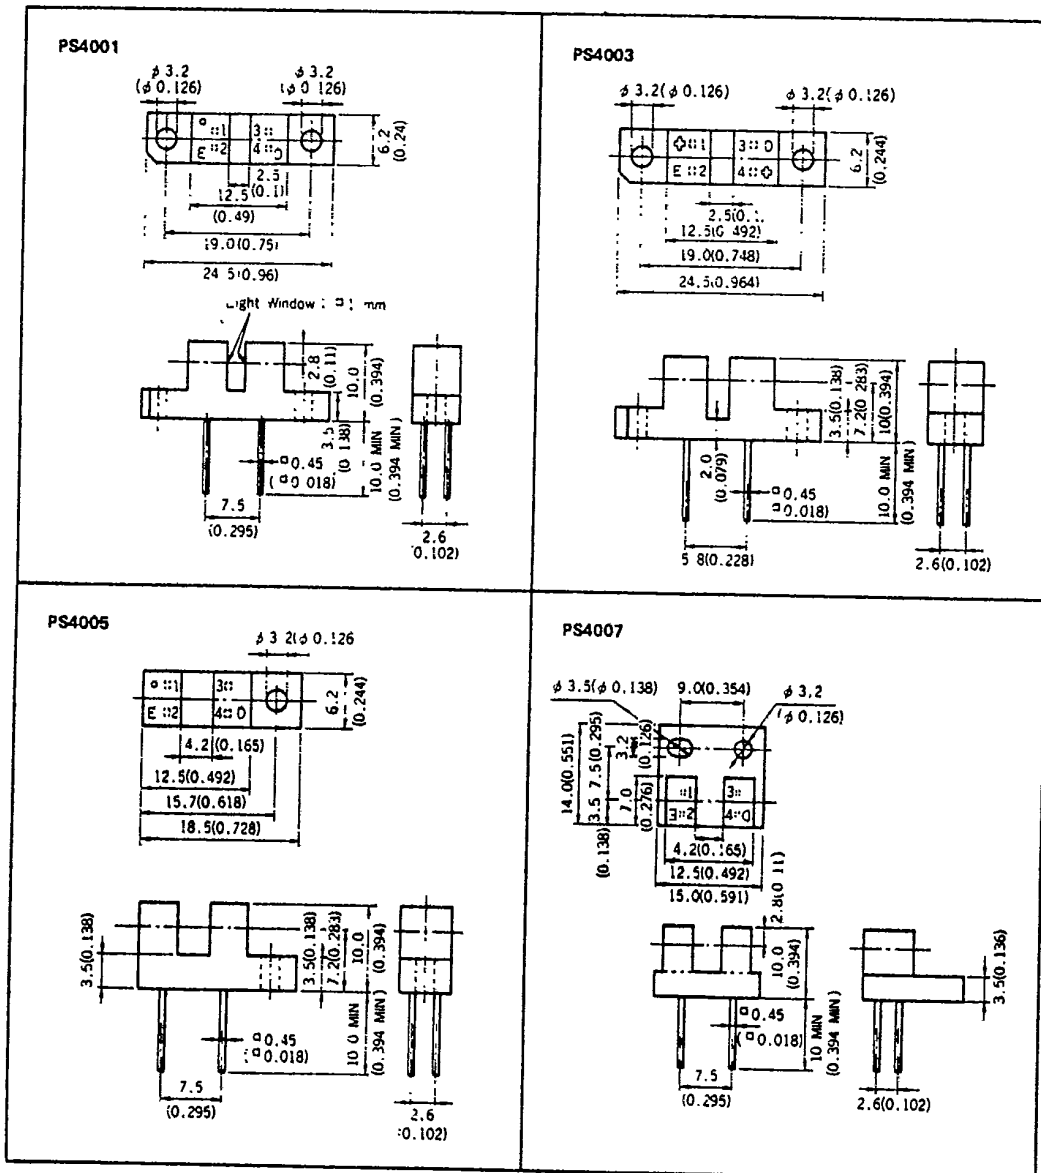





PS4001, PS4003, PS4005, PS4007, PS4009, PS4010, PS4011

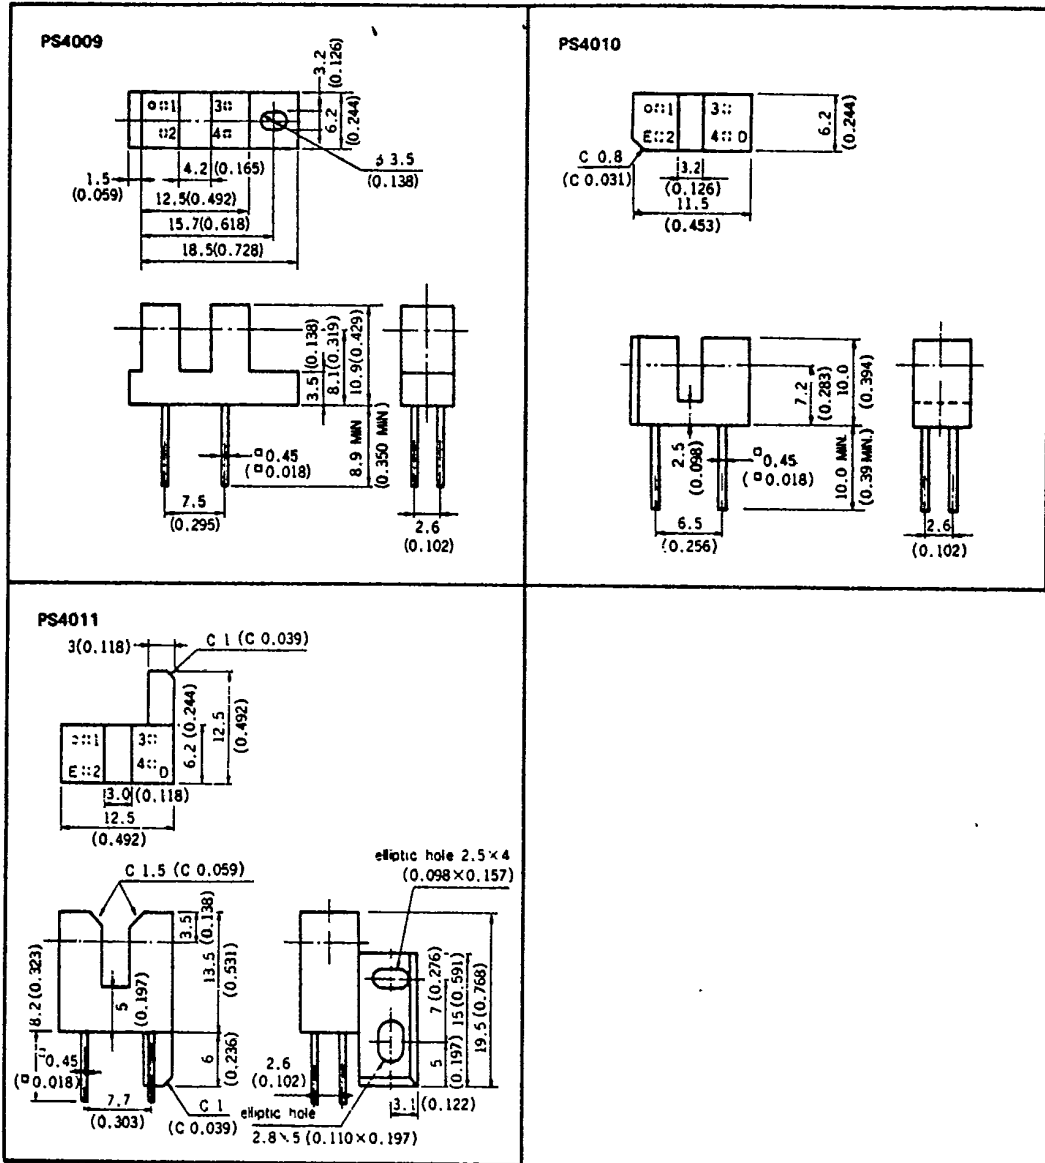





PS4001, PS4003, PS4005, PS4007, PS4009, PS4010, PS4011

T-41-73

TYPICAL CHARACTERISTICS (Ta = 25 °C)

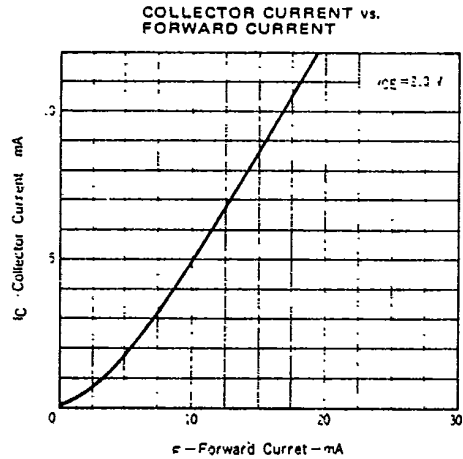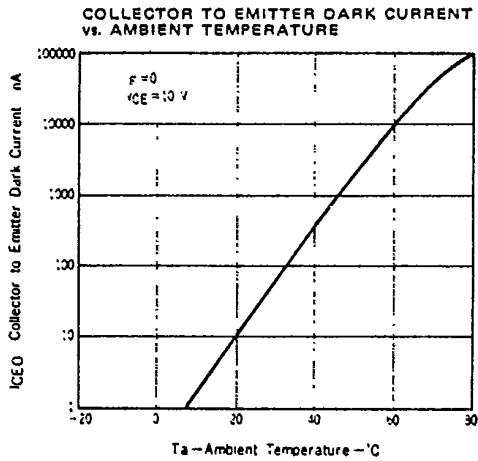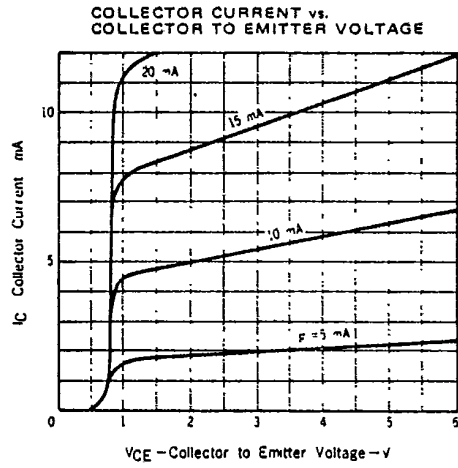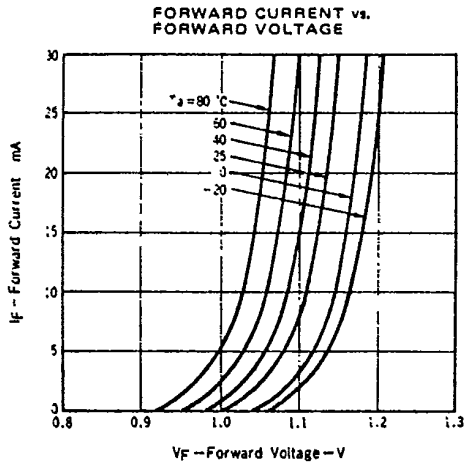

PS4001, PS4003, PS4005, PS4007, PS4009, PS4010, PS4011

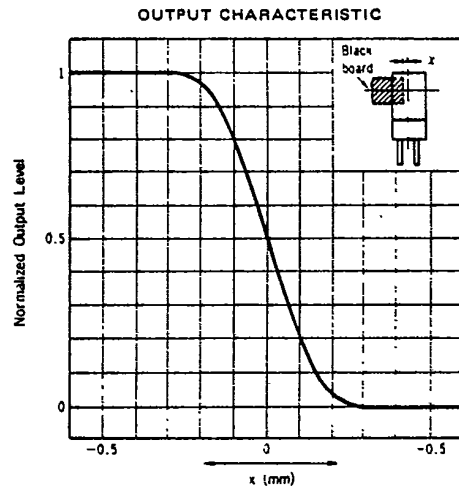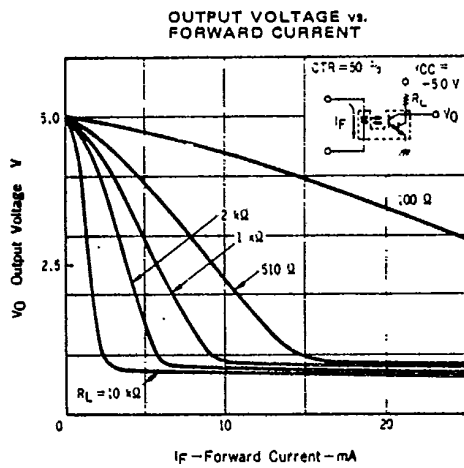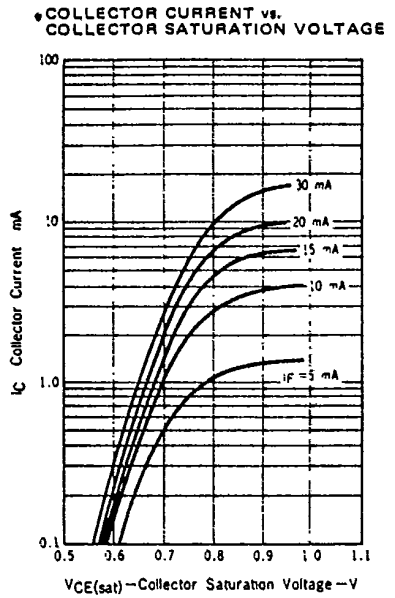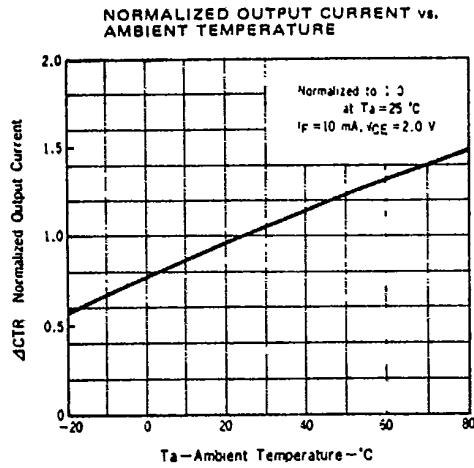

TYPICAL APPLICATION

