



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD45HMF1

RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

DESCRIPTION

RD45HMF1 is a MOS FET type transistor specifically designed for 900MHz-band High power amplifiers applications.

FEATURES


High power and High Gain:
Pout>45W, Gp>4.7dB @Vdd=12.5V,f=900MHz
High Efficiency: 50%typ.

APPLICATION

For output stage of high power amplifiers in 800-900MHz Band mobile radio sets.

RoHS COMPLIANT

RD45HMF1-101 is a RoHS compliant products.
RoHS compliance is indicate by the letter "G" after the Lot Marking.

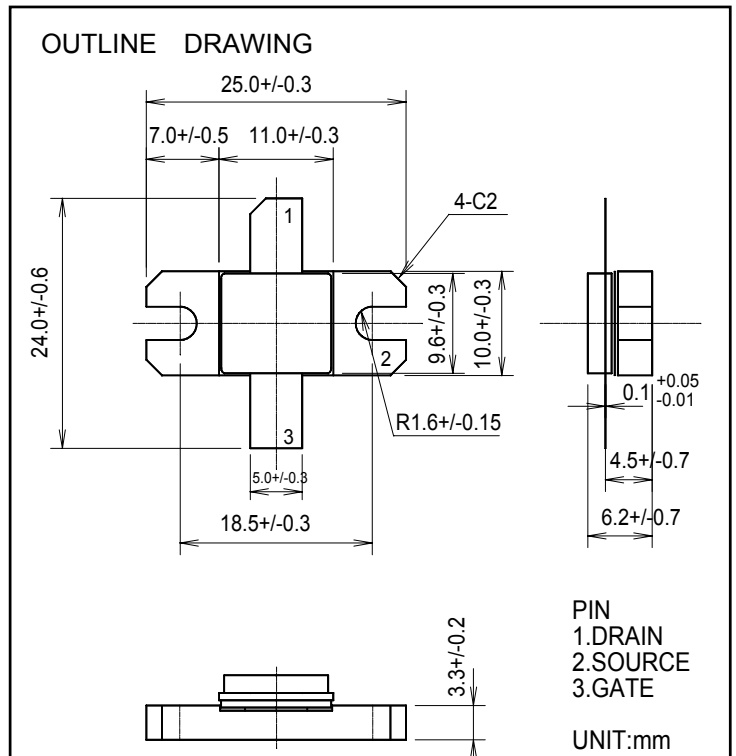

ABSOLUTE MAXIMUM RATINGS

(Tc=25°C UNLESS OTHERWISE NOTED)

| SYMBOL | PARAMETER | CONDITIONS | RATINGS | UNIT |
|---------------------|-------------------------|-------------------------------------|-------------|------|
| V _{DSS} | Drain to source voltage | V _{GS} =0V | 30 | V |
| V _{GSS} | Gate to source voltage | V _{DS} =0V | +/-20 | V |
| P _{ch} | Channel dissipation | T _c =25°C | 125 | W |
| P _{in} | Input power | Z _g =Z _l =50Ω | 25 | W |
| I _D | Drain current | - | 15 | A |
| T _{ch} | Channel temperature | - | 175 | °C |
| T _{stg} | Storage temperature | - | -40 to +175 | °C |
| R _{th j-c} | Thermal resistance | junction to case | 1.2 | °C/W |

Note 1: Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C UNLESS OTHERWISE NOTED)

| SYMBOL | PARAMETER | CONDITIONS | LIMITS | | | UNIT |
|------------------|--------------------------------|--|------------|-----|------|------|
| | | | MIN | TYP | MAX. | |
| I _{DSS} | Zerogate voltage drain current | V _{DS} =17V, V _{GS} =0V | - | - | 10 | μA |
| I _{GSS} | Gate to source leak current | V _{GS} =10V, V _{DS} =0V | - | - | 1 | μA |
| V _{TH} | Gate threshold voltage | V _{DS} =12V, I _{DS} =1mA | 1.0 | - | 3.0 | V |
| P _{out} | Output power | f=900MHz, V _{DD} =12.5V | 45 | 50 | - | W |
| η _D | Drain efficiency | P _{in} =15W, I _{dq} =2.0A | 45 | 50 | - | % |
| | Load VSWR tolerance | V _{DD} =15.2V, P _o =45W(PinControl) I _{dq} =2.0A, Z _g =50Ω Load VSWR=20:1(All Phase) | No destroy | | | - |

Note : Above parameters , ratings , limits and conditions are subject to change.









ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD45HMF1

RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

TYPICAL CHARACTERISTICS

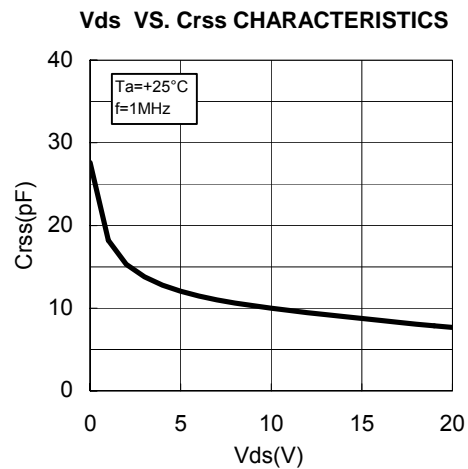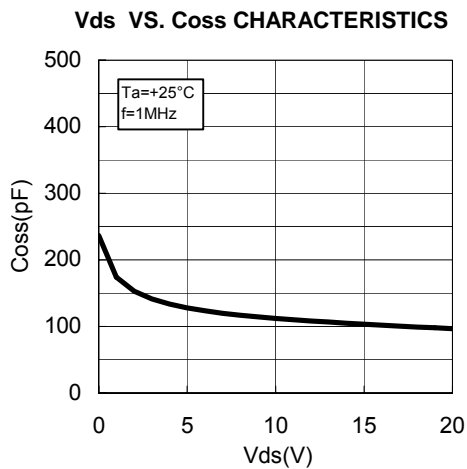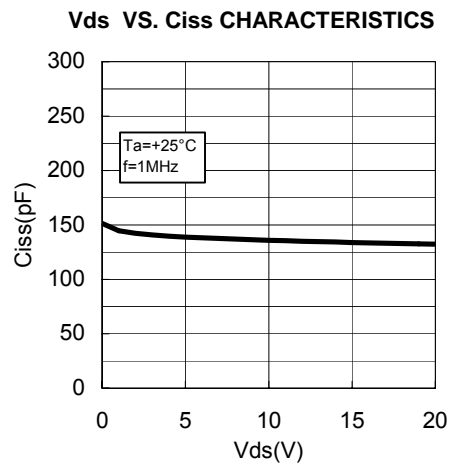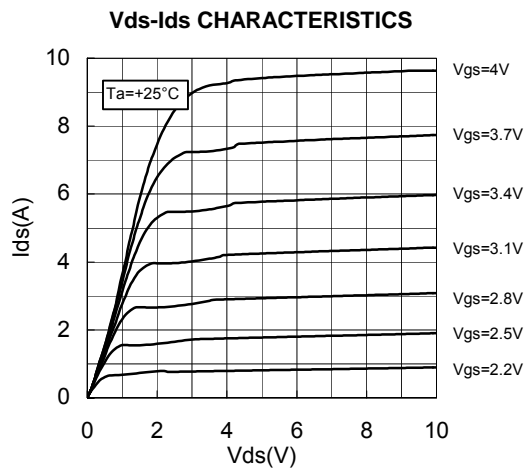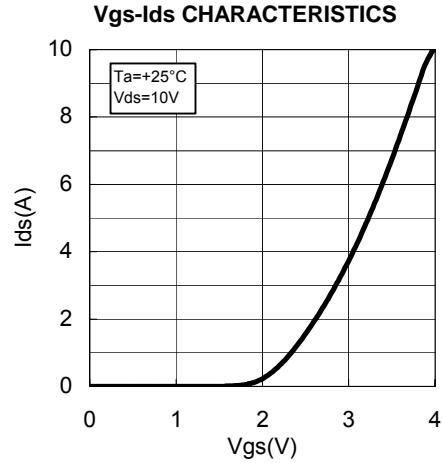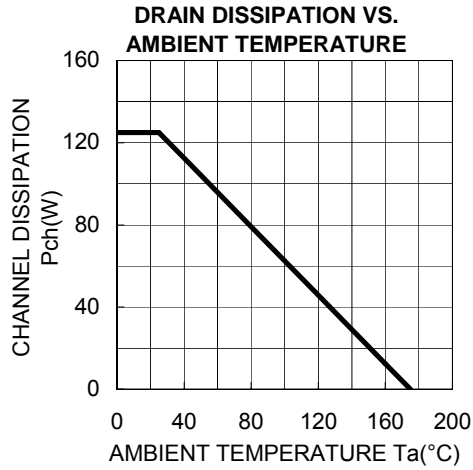



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD45HMF1


RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

TYPICAL CHARACTERISTICS


Pin-Po CHARACTERISTICS

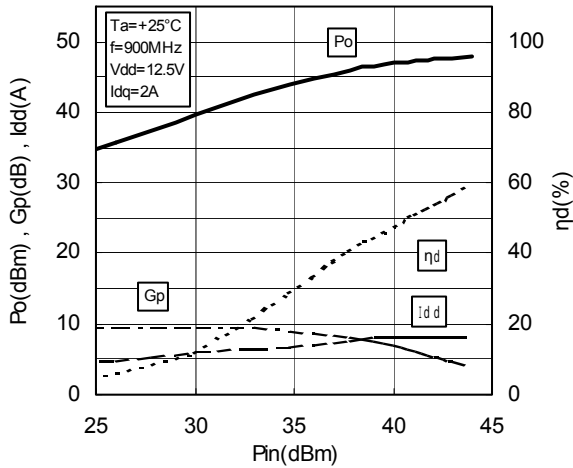


Pin-Po CHARACTERISTICS

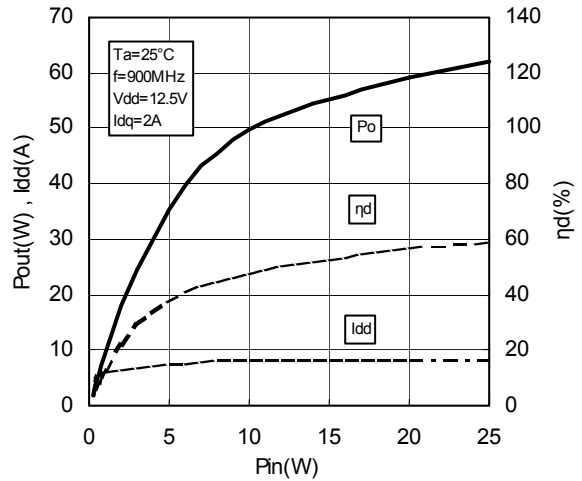


Vdd-Po CHARACTERISTICS

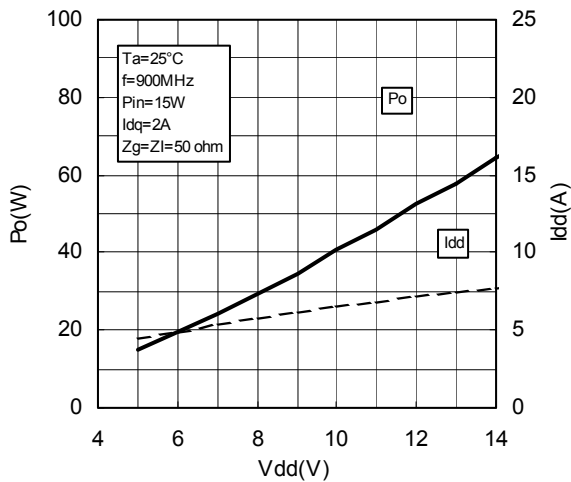

Vgs-Ids CHARACTERISTICS 2

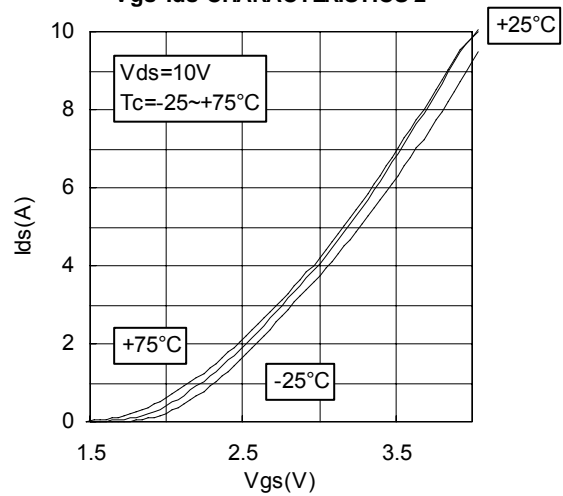




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD45HMF1

RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

TEST CIRCUIT(f=900MHz)

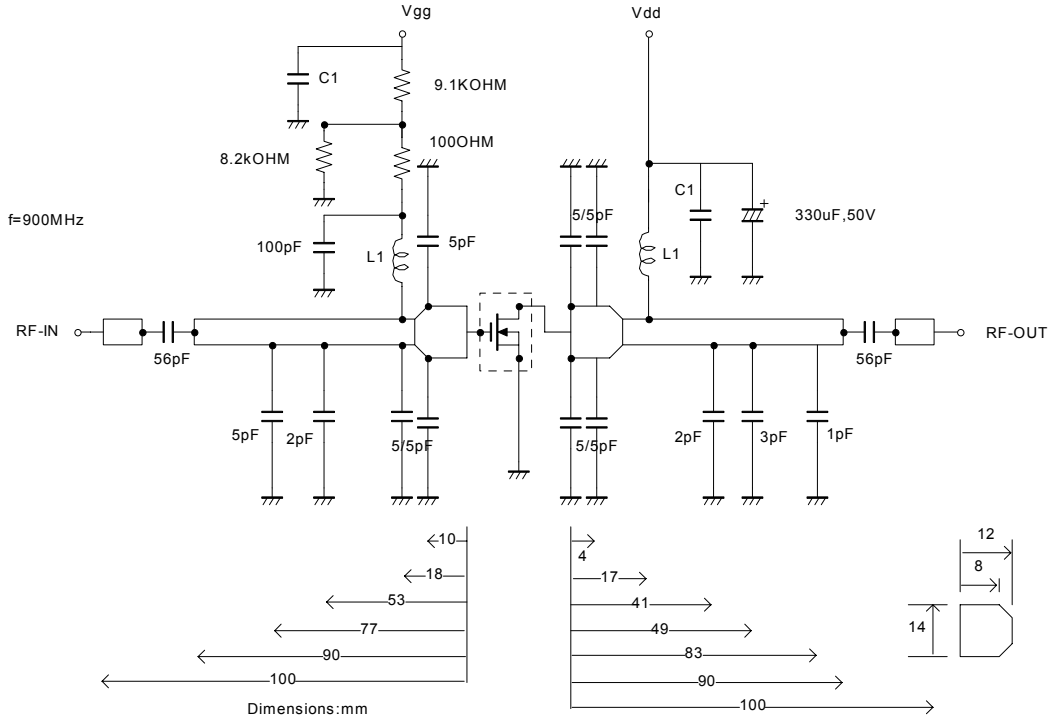

C1:2200pF*2 in parallel

L1:1Turns,I.D3mm,D1.5mm silver plated copper wire

Note:Board material-Teflon substrate

Micro strip line width=4.2mm/50OHM,er:2.7,t=1.6mm




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD45HMF1


RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

INPUT/OUTPUT IMPEDANCE VS.FREQUENCY CHARACTERISTICS

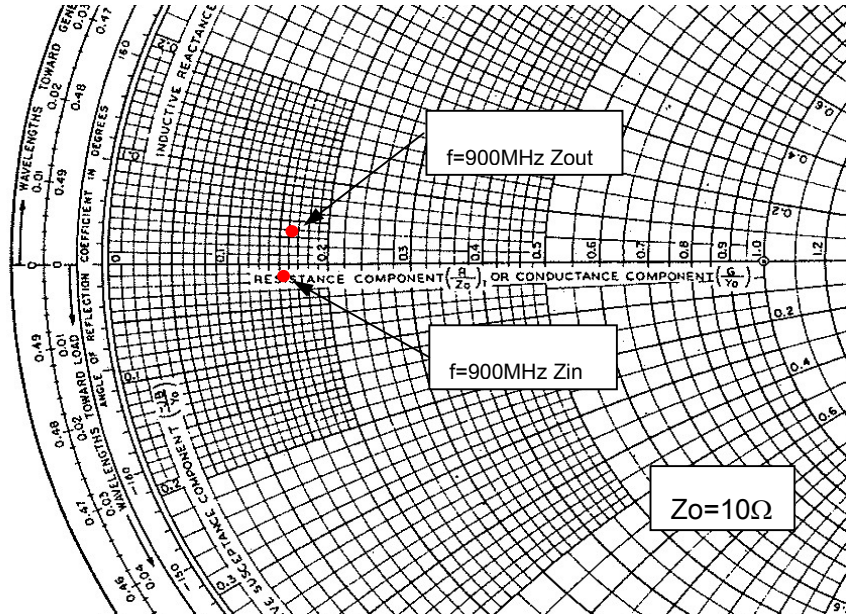

Zin , Zout

| f | Zin | Zout | Conditions |
|-------|------------|------------|---------------------------|
| (MHz) | (ohm) | (ohm) | |
| 900 | 1.53-j0.17 | 1.63+j0.34 | Po=45W, Vdd=12.5V,Pin=15W |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD45HMF1

RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

RD45HMF1 S-PARAMETER DATA (@Vdd=12.5V, Id=800mA)

| Freq. [MHz] | S11 | | S21 | | S12 | | S22 | |
|----------------|-------|--------|-------|-------|-------|-------|-------|--------|
| | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) |
| 100 | 0.902 | -177.8 | 4.481 | 77.4 | 0.008 | 0.7 | 0.864 | -176.6 |
| 200 | 0.911 | -179.0 | 2.125 | 63.5 | 0.011 | -26.0 | 0.877 | -177.8 |
| 300 | 0.917 | -179.6 | 1.319 | 52.3 | 0.011 | -1.0 | 0.895 | -179.0 |
| 400 | 0.932 | 179.9 | 0.889 | 43.0 | 0.007 | -25.4 | 0.924 | 179.7 |
| 500 | 0.941 | 178.7 | 0.642 | 35.6 | 0.005 | 24.9 | 0.936 | 178.8 |
| 600 | 0.945 | 177.7 | 0.497 | 30.2 | 0.004 | 14.3 | 0.937 | 177.6 |
| 700 | 0.950 | 176.6 | 0.384 | 23.3 | 0.005 | 60.8 | 0.948 | 176.2 |
| 800 | 0.955 | 175.5 | 0.318 | 18.7 | 0.006 | 66.9 | 0.954 | 174.6 |
| 900 | 0.959 | 174.4 | 0.265 | 15.6 | 0.008 | 66.0 | 0.951 | 173.7 |
| 1000 | 0.961 | 173.6 | 0.226 | 11.1 | 0.008 | 33.5 | 0.956 | 172.5 |
| 1100 | 0.964 | 171.6 | 0.178 | 9.0 | 0.012 | 74.4 | 0.962 | 170.8 |
| 1200 | 0.963 | 170.3 | 0.166 | 7.6 | 0.009 | 52.8 | 0.961 | 169.6 |
| 1300 | 0.966 | 168.5 | 0.147 | 2.2 | 0.013 | 71.1 | 0.966 | 168.1 |
| 1400 | 0.967 | 167.0 | 0.109 | 0.3 | 0.016 | 70.5 | 0.961 | 166.1 |
| 1500 | 0.965 | 165.3 | 0.106 | 8.8 | 0.014 | 57.8 | 0.958 | 164.6 |
| 1600 | 0.969 | 163.0 | 0.102 | 16.2 | 0.022 | 71.3 | 0.968 | 163.2 |
| 1700 | 0.969 | 161.1 | 0.106 | 10.0 | 0.021 | 78.6 | 0.956 | 161.1 |
| 1800 | 0.966 | 158.8 | 0.113 | 4.1 | 0.024 | 65.7 | 0.960 | 159.5 |
| 1900 | 0.967 | 156.3 | 0.122 | -3.7 | 0.026 | 64.1 | 0.965 | 156.7 |
| 2000 | 0.963 | 153.9 | 0.106 | 1.7 | 0.028 | 59.4 | 0.955 | 154.6 |
| 2100 | 0.963 | 150.9 | 0.101 | 1.7 | 0.031 | 57.5 | 0.958 | 152.0 |
| 2200 | 0.961 | 148.3 | 0.093 | -6.4 | 0.031 | 55.0 | 0.961 | 148.9 |
| 2300 | 0.956 | 145.2 | 0.094 | -4.9 | 0.037 | 54.6 | 0.953 | 145.6 |
| 2400 | 0.955 | 142.3 | 0.096 | -6.1 | 0.038 | 52.0 | 0.949 | 142.9 |
| 2500 | 0.954 | 139.3 | 0.091 | -10.5 | 0.041 | 47.9 | 0.958 | 138.9 |
| 2600 | 0.949 | 136.1 | 0.093 | -12.6 | 0.044 | 43.8 | 0.943 | 135.4 |
| 2700 | 0.949 | 133.0 | 0.081 | -16.4 | 0.045 | 40.7 | 0.946 | 132.3 |
| 2800 | 0.948 | 129.6 | 0.083 | -19.7 | 0.046 | 33.2 | 0.948 | 127.9 |
| 2900 | 0.943 | 126.3 | 0.086 | -24.1 | 0.048 | 32.8 | 0.937 | 124.3 |
| 3000 | 0.939 | 123.0 | 0.087 | -31.6 | 0.061 | 10.7 | 0.934 | 120.9 |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD45HMF1

RoHS Compliance, Silicon MOSFET Power Transistor 900MHz,45W

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.