

Description

The S339 consists of four independent voltage comparators designed to operate from a single power supply over a wide voltage range.

Features

- Single Supply Operation: 2V to 36V.
- Dual Supply Operation: $\pm 1V$ to $\pm 18V$.
- Allow Comparison of Voltages Near Ground Potential.
- Low Current Drain 800 μA Typ.
- Compatible with all Forms of Logic.
- Low Input Bias Current: 25nA Typ.
- Low Input Offset Current: $\pm 5nA$ Typ.
- Low Offset Voltage: $\pm 1mV$ Typ.

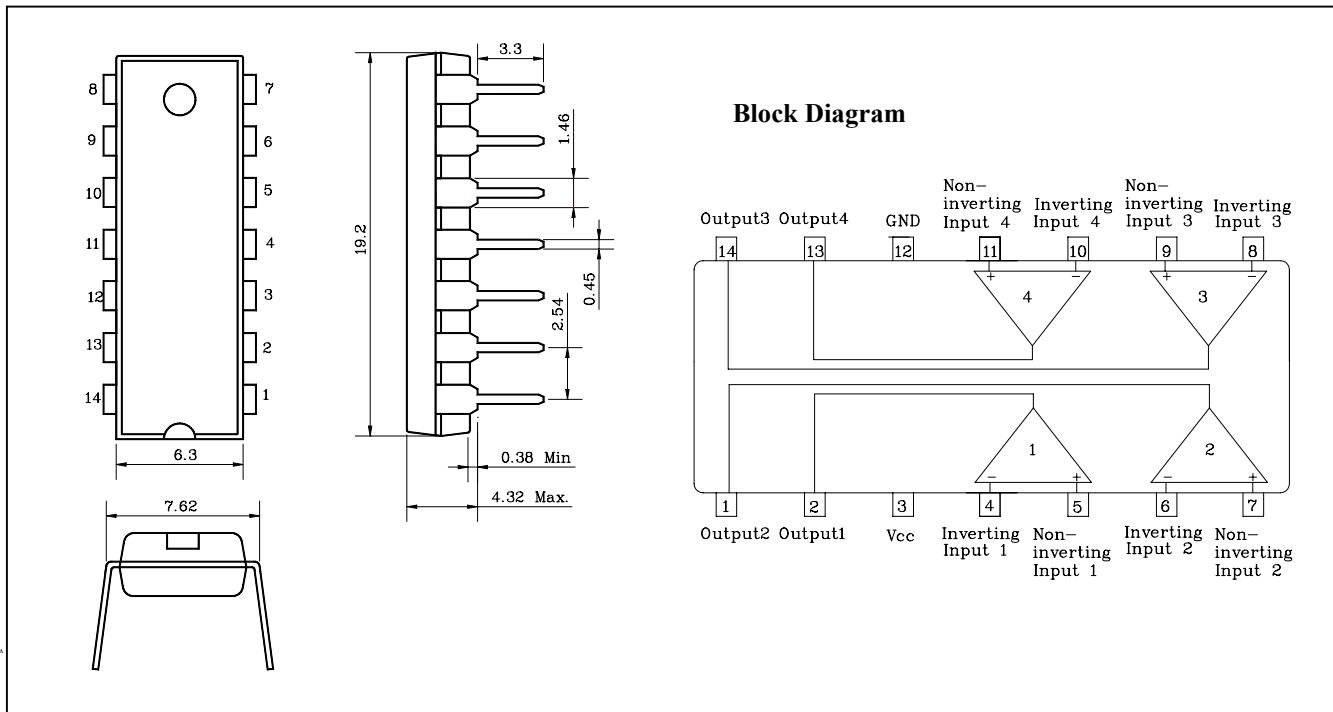
Applications

- Transducer amplifier
- DC gain blocks
- Conventional operational amplifiers

Ordering Information

Type NO.	Marking	Package Code
S339P	S339P	DIP-14

Outline Dimensions

unit : mm


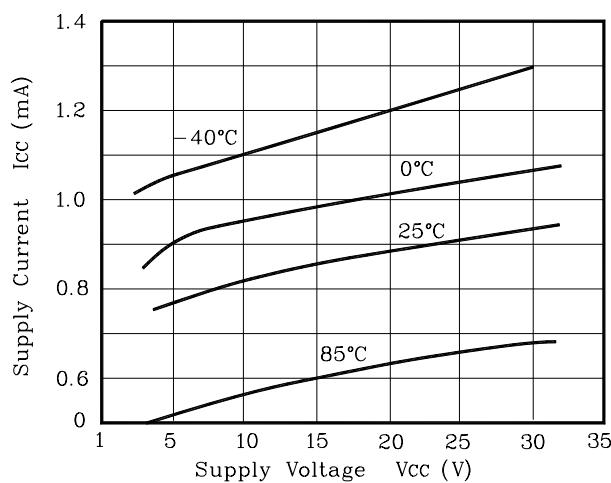
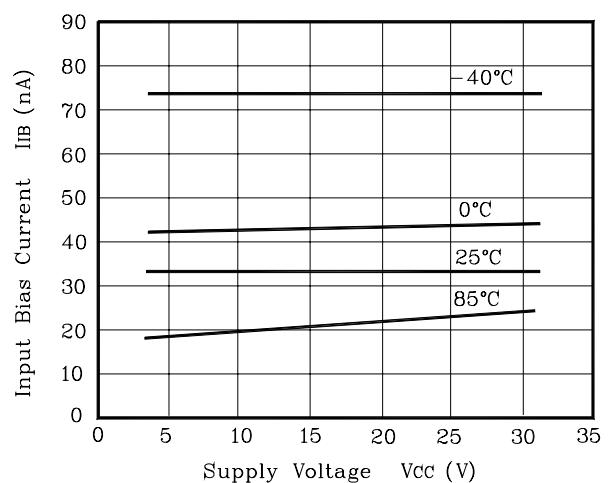
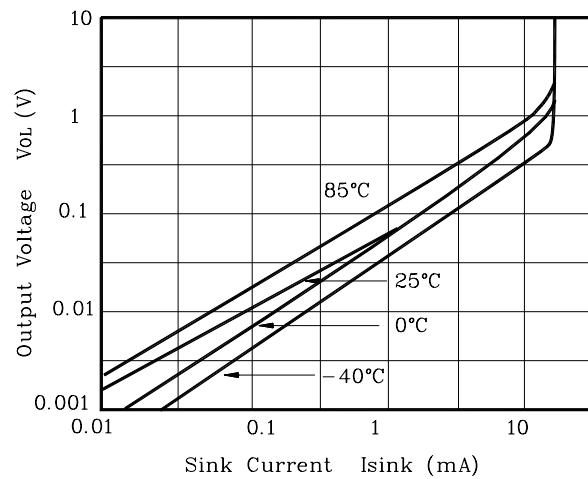
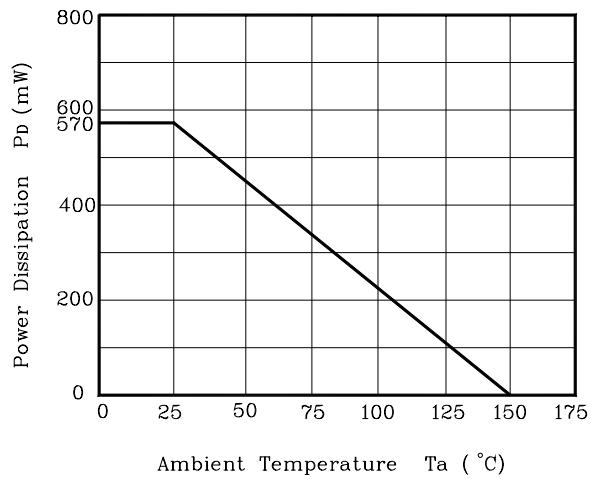
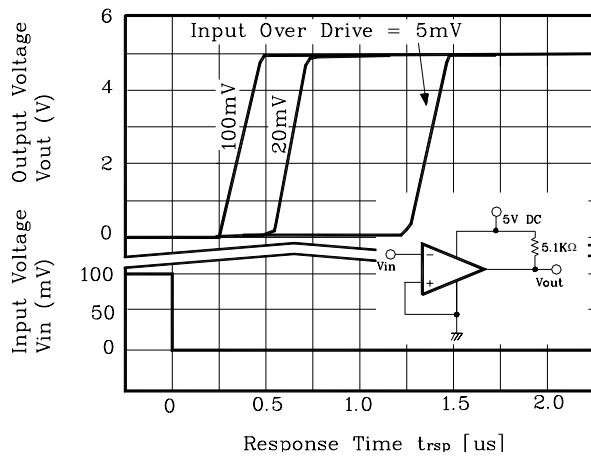
Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V_{CC}	36 or ± 18	V
Differential input voltage	V_{IND}	36	V
Input voltage	V_{IN}	-0.3 ~ +36	V
Power Dissipation	P_D	570	mW
Operating temperature	T_{opr}	-40 ~ +85	°C
Storage temperature	T_{stg}	-65 ~ 150	°C

Electrical Characteristics(Unless otherwise specified. $V_{CC} = 5V$ and $-40^{\circ}C \leq Ta \leq +85^{\circ}C$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V_{IOS}	$V_O = 1.4V, R_s = 0\Omega$	-	± 2	± 5	mV
Input Offset Current	I_{IOS}	-	-	± 5	± 50	nA
Input Bias Current	I_{IB}	-	-	25	250	nA
Input Common Mode Voltage Range	V_{ICR}	-	0	-	$V_{CC} - 1.5$	V
Supply Current	I_{CC}	$V_{CC} = 5V, R_L = \infty, \text{All Channel}$	-	0.8	2	mA
Large Signal Voltage Gain	A_V	$V_{CC} = 15V, R_L = 15K\Omega$	-	200	-	V/mV
Output Voltage ('L' Level)	V_{SAT}	$V_{IN+} = 0V, V_{IN-} = 1V$ $I_{SINK} \leq 4mA$	-	130	400	mV
Response Time	t_{RES}	$V_{RC} = 5V, R_L = 5.1K\Omega$	-	1.3	-	uS
Output Sink Current	I_{SINK}	$V_O \leq 1.5V,$ $V_{IN+} = 0V, V_{IN-} = 1V$	6	16	-	mA
Output Leakage Current	I_{Leak}	$V_O = 5V$ $V_{IN+} = 1V, V_{IN-} = 0V$	-	0.1	-	nA

Electrical Characteristic Curves

Fig. 1 V_{CC} - I_{CC} **Fig. 2** V_{CC} - I_{IB} **Fig. 3** V_{OL} - I_{SINK} **Fig. 4** P_D - T_a **Fig. 5** V_{IN}, V_{OUT} - t_{rsp} **Fig. 6** V_{IN}, V_{OUT} - t_{rsp} 