


7-23-07

**SBP40-P SERIES**

SCHOTTKY RECTIFIER

**GENERAL INSTRUMENT**



**FEATURES**


- Dual rectifier construction, positive center-tap
- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- Exceeds environmental standards of MIL-STD-19500
- Metal to silicon rectifier, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low  $V_f$
- High surge capability
- Epitaxial construction
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

Case: TO-3P  
 Terminals: Leads solderable per MIL-STD-202, Method 208  
 Polarity: As marked  
 Mounting Position: Any  
 Weight: .47 ounces, 13.2 ounces

**VOLTAGE RANGE**  
20 to 60 Volts

**CURRENT**  
40 Amperes

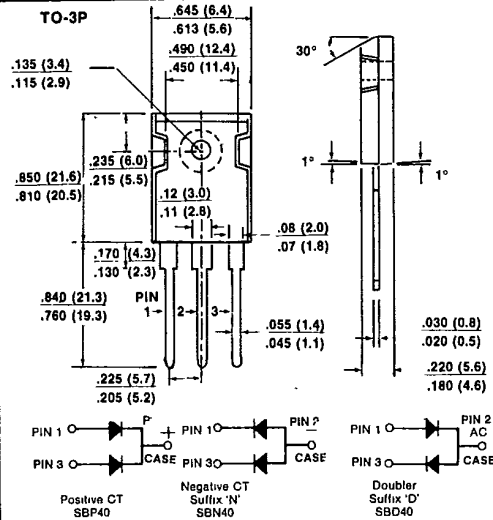

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

|   | SBP 4020P   | SBP 4030P | SBP 4035P | SBP 4040P | SBP 4045P | SBP 4050P   | SBP 4060P | UNITS        |
|---|-------------|-----------|-----------|-----------|-----------|-------------|-----------|--------------|
| Maximum Recurrent Peak Reverse Voltage  | 20          | 30        | 35        | 40        | 45        | 50          | 60        | V            |
| Maximum RMS Voltage   | 14          | 21        | 24.5      | 28        | 31.5      | 35          | 42        | V            |
| Maximum DC Blocking Voltage   | 20          | 30        | 35        | 40        | 45        | 50          | 60        | V            |
| Maximum Average Forward Rectified Current<br>See Fig. 1   | 40          |           |           |           |           |             |           | A            |
| Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)                         | 300         |           |           |           |           |             |           | A            |
| Maximum Instantaneous Forward Voltage<br>Per Leg $I_f = 20A, T_c = 125^\circ C$ (Note 3)<br>$I_f = 20A, T_c = 25^\circ C$ |             |           |           |           |           | .70         | .80       | V<br>V       |
| Maximum Average Reverse Current at $T_c = 25^\circ C$<br>Rated DC Blocking Voltage per element $T_c = 100^\circ C$        |             |           |           |           |           | 10          | 100       | mA<br>mA     |
| Typical Thermal Resistance $R_{\theta JC}$ (Note 1)   | 1.4         |           |           |           |           |             |           | $^\circ C/W$ |
| Typical Junction Capacitance (Note 2)   | 1400        |           |           |           |           | 700         |           | pF           |
| Operating Temperature Range $T_c$   | -65 to +125 |           |           |           |           | -65 to +150 |           | $^\circ C$   |
| Storage Temperature Range, $T_{stg}$  | -65 to +150 |           |           |           |           |             |           | $^\circ C$   |

NOTES:  
 1. Thermal Resistance Junction to CASE. 3. 300μs Pulse Width, 2% Duty Factor.  
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts