



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638  
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

SSR8045N


80 AMP  
45 VOLTS  
SCHOTTKY  
RECTIFIER

### Designer's Data Sheet

#### FEATURES:

- Low Reverse Leakage
- Low Forward Voltage Drop
- Guard Ring for Overvoltage protection
- Isolated Hermetically Sealed Power Package
- Available with Ceramic Seals
- Custom Lead Forming Available
- Eutectic Die Attach
- 175°C Operating Temperature
  
- TX, TXV and Space Level Screening Available

TO-258



#### MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	45	Volts
	VRWM		
	VR		
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	80	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	1200	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	0.5	°C/W

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0053 A

MED

# SSR8045N

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638  
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


## ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
<b>Instantaneous Forward Voltage Drop</b> (IF = 20 Adc, TA=25°C, 300µs Pulse) (IF = 40 Adc, TA=25°C, 300µs Pulse) (IF = 80 Adc, TA=25°C, 300µs Pulse)	<b>VF1</b>	0.55 0.70 0.80	Vdc
<b>Instantaneous Forward Voltage Drop</b> (IF = 40 Adc, TA= - 55°C, 300µs Pulse)	<b>VF2</b>	0.77	Vdc
<b>Reverse Leakage Current</b> (Rated VR, TA=25°C, 300µs pulse minimum)	<b>IR1</b>	800	µA
<b>Reverse Leakage Current</b> (Rated VR, TA=100°C, 300µs pulse minimum)	<b>IR2</b>	60	mA
<b>Junction Capacitance</b> (VR = 10 Vdc, TA=25°C, f= 1 MHz)	<b>CJ</b>	3200	pf

## CASE OUTLINE: TO-258

**PIN 1: CATHODE**  
**PIN 2: ANODE**  
**PIN 3: ANODE**

**NOTE:**  
 Pin 2 and 3 should be connected in application.

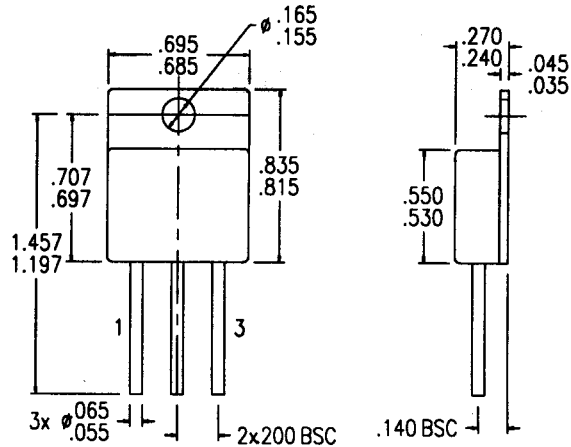

## TYPICAL OPERATING CURVES

(TA=25°C unless otherwise specified)

