




### Features

- ◆ Isolation Test Voltage 6'000 Vpk
- ◆ With supplementary Insulation,  
rated for 250 Vrms working Voltage
- ◆ Physical Clearance of Isolation Barrier  
2.5 mm min.
- ◆ Certified to IEC/EN 60950 Safety Standards  
Safety Barrier 100% Production Test
- ◆ Low Coupling Capacity
- ◆ Single-in-Line Package (SIP)
- ◆ Lead free Design, RoHS compliant
- ◆ 3 Year Product Warranty

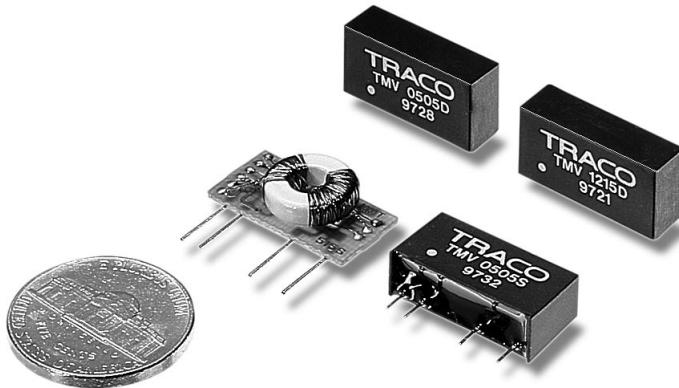

The TMV-EN series are dc/dc converters with supplementary high I/O-isolation, to comply with safety standard IEC/EN 60950. They are designed for applications where approved isolation is required, i.e. information technology equipment or medical equipment. SMT-design and a special transformer technology made it possible to build these converters in a very small SIP-package, requiring a minimum space on the PCB.

### Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505 EN	5 VDC ±10%	5 VDC	200 mA	65 %
TMV 0512 EN		12 VDC	80 mA	65 %
TMV 0515 EN		15 VDC	65 mA	65 %
TMV 0505DEN		± 5 VDC	±100 mA	65 %
TMV 0512DEN		±12 VDC	± 40 mA	71 %
TMV 0515DEN		±15 VDC	± 30 mA	72 %
TMV 1205 EN	12 VDC ±10%	5 VDC	200 mA	65 %
TMV 1212 EN		12 VDC	80 mA	65 %
TMV 1215 EN		15 VDC	65 mA	65 %
TMV 1205DEN		± 5 VDC	±100 mA	65 %
TMV 1212DEN		±12 VDC	± 40 mA	73 %
TMV 1215DEN		±15 VDC	± 30 mA	74 %

### Input Specifications

Input current no load /full load	5 Vin models 12 Vin models	55 mA / 300 mA typ. 30 mA / 125 mA typ.
Surge voltage (1 sec. max.)	5 Vin models 12 Vin models	9 V max. 18 V max.
Reverse voltage protection		0.3 A max.
Reflected input ripple current		can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter		internal capacitor

### Output Specifications

Voltage set accuracy	± 3 %	
Voltage balance (dual output models)	± 1 % max.	
Regulation	– Input variation – Load variation 20 – 100 %	± 1.2 % / 1 % change Vin < 10 %
Ripple and noise (20 MHz Bandwidth)		120 mV pk-pk typ.
Temperature coefficient		± 0.02 % / K
Short circuit protection		limited 1 sec. max.
Capacitive load	– Single output models – Dual output models	680 µF max. 220 µF max.

### Isolation /Safety

Isolation voltage	– Isolation test voltage (tested for 1 sec.) – I/O isolation voltage	6'000 VDC 3'000 VAL rms
Isolation capacity	Input/Output	10 pF typ.
Isolation resistance	Input/Output	>1'000 M ohm
Safety standards		EN 60950 (rated for 250VAC working voltage)
Safety approvals		test report by BSI (British Standard Institute)

### General Specifications


Temperature ranges	– Operating – Case temperature – Storage	–40 °C ... +85 °C +95 °C max. –40 °C ... +125 °C
Derating above 85°C		5 % / K
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217E)		>2'000'000 h @ 25 °C
Switching frequency		50 kHz typ. (Frequency modulation)
Frequency change over line and load		± 30 % max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


### Physical Specifications

Case material	non conductive FR4 (UL 94V-0 rated)	
Package weight	– Single output models	4.0 g (0.14 oz)
	– Dual output models	4.0 g (0.14 oz)
Soldering temperature	max. 265°C / 10 sec	

### Outline Dimensions mm (inches)

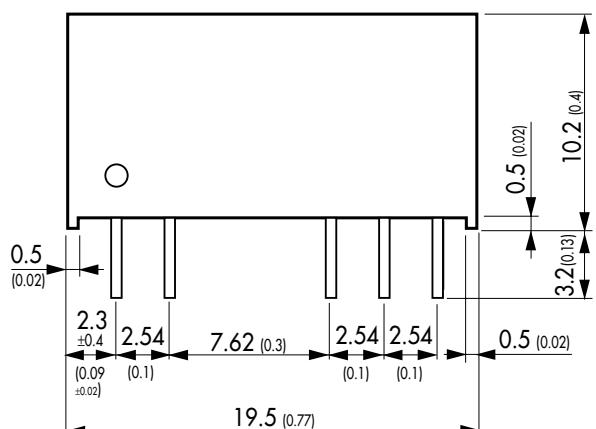

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

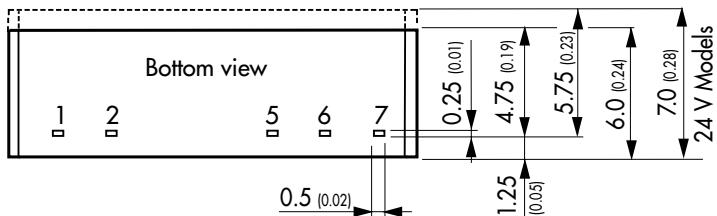

( ) = inches

Tolerances ±0.25 (0.01)

pins ±0.05 (0.002)

Specifications can be changed without notice