

## 2mm FLAT TOP LED LAMP

WP13GD

**GREEN** 


#### **Features**

- •MOUNTS FLUSH WITH PANEL.
- •LOW POWER CONSUMPTION.
- •SUITABLE FOR AUDIO PANEL INDICATOR.
- •FITS 2mm HOLE IN PANEL UP TO 3.5mm (.138").
- •LONG LIFE SOLID STATE RELIABILITY.
- •RoHS COMPLIANT.

## **Description**

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

## **Package Dimensions**

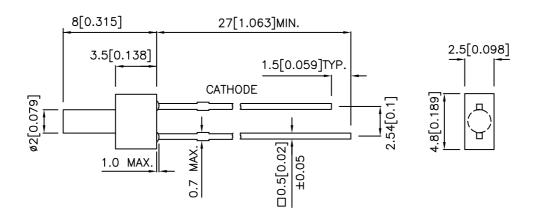

#### Notes

- All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25 (0.01")$  unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

SPEC NO: DSAF2528 APPROVED: J. Lu REV NO: V.1 CHECKED: Allen Liu DATE: APR/18/2005 DRAWN: W.J.ZHU PAGE: 1 OF 3 ERP:1101001417

# Kingbright

## **Selection Guide**

Part No.	Dice	Lens Type	lv (m @ 10	,	Viewing Angle
		,,	Min. Typ.		2 θ 1/2
WP13GD	GREEN (GaP)	GREEN DIFFUSED	3	10	70°

Note:

# Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
IR	Reverse Current	Green		10	uA	VR = 5V

# Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units			
Power dissipation	105	mW			
DC Forward Current	25	mA			
Peak Forward Current [1]	140	mA			
Reverse Voltage	5	V			
Operating/Storage Temperature -40°C To +85°C					
Lead Solder Temperature [2]	older Temperature [2] 260°C For 3 Seconds				
ead Solder Temperature [3] 260°C For 5 Seconds					

#### Notes


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

 SPEC NO: DSAF2528
 REV NO: V.1
 DATE: APR/18/2005
 PAGE: 2 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: W.J.ZHU
 ERP:1101001417

<sup>1.</sup>  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


# Kingbright

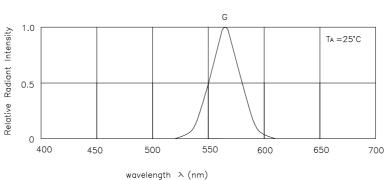



wavelength >> (nm)
RELATIVE INTENSITY Vs. WAVELENGTH


Green


### WP13GD











## Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAF2528 REV NO: V.1
APPROVED: J. Lu CHECKED: Allen Liu

DATE: APR/18/2005 DRAWN: W.J.ZHU PAGE: 3 OF 3 ERP:1101001417