

Switch

ZSWA-4-30DR

High Isolation, SP4T, 50Ω DC to 3 GHz

Features

- high isolation, 37 dB typ @ 2 GHz
- integral TTL driver

Applications

- transmitter/ receiver isolation
- automated switching networks
- cellular
- PCN



CASE STYLE: CV665
CONNECTOR: SMA
PRICE: \$119.95 ea.
QTY.: (1-9)

Electrical Specifications at 25°C

MODEL NO.	FREQ. (GHz)	REFLECTIVE	ABSORPTIVE	INSERTION LOSS (dB)						1 dB COMPRESSION (dBm)			IN-OUT ISOLATION (dB)					
				FREQUENCY BAND						FREQUENCY BAND			FREQUENCY BAND					
				A [†]		B		C		A	B	C	A		B		C	
Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Typ.	Typ.	Typ.	Min.	Typ.	Min.	Typ.	Min.				
ZSWA-4-30DR	DC - 3		●	1.0	1.8	1.5	3.0	2.0	3.9	18	20	20	50	40	37	32	31	26

A= DC-5 GHz, B= 0.5-2 GHz, C= 2-3 GHz

[†] Below 100 MHz, 1 dB compression gradually decreases to 10 dBm at 1 MHz.

additional specifications

TTL Control Voltage	0/5.5
Low threshold, V	0.8 max.
High threshold, V	3.5 min.
TTL Control Current	
High V, mA	0.2 max.
Low V, mA	0.02 max.
Positive Supply V.	+5±0.5
Negative Supply V.	-5±0.25
Positive Supply Current, mA	4 max.
Negative Supply Current, mA	20 max.
VSWR (:1)	1.28 typ., ON 1.24 typ., OFF DC-2GHz
Rise/ Fall time (10%-90%), ns	25 typ.
Switching time, 50% of Control to 90% RF (Turn-on), ns	45 typ.
to 10% RF (Turn-off), ns	
*Video Leakage, mVp-p 0/-5V control	30 typ.
Temperature, °C operating	-30 to 85
storage	-55 to 100
MTBF, hrs @85°C case	30X10 ⁶

control logic

Model Series	Control Ports				RF outputs			
	1	2	3	4	1	2	3	4
ZSWA	Low	High	High	High	On	Off	Off	Off
	High	Low	High	High	Off	On	Off	Off
	High	High	Low	High	Off	Off	On	Off
	High	High	High	Low	Off	Off	Off	On


NOTES:

- * Video leakage or break through is defined as leakage of TTL switching signal to RF output ports.
- 1. Absolute maximum power and voltage ratings:
RF input power, 250 mW,
Supply voltage: ±6 V DC
- 2. OFF state of RF output is low impedance.
- 3. Prices and specifications subject to change without notice.

Pin Configuration

RF IN	1
RF OUT 1	2
RF OUT 2	3
RF OUT 3	4
RF OUT 4	5
CONTROL 1	C5
CONTROL 2	C3
CONTROL 3	C4
CONTROL 4	C6
+5v	C2
-5v	C1

Outline Drawing

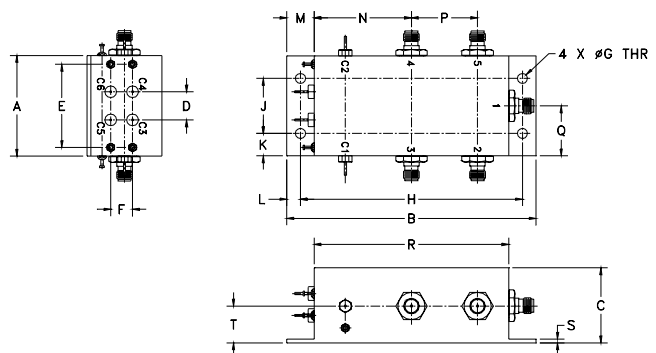

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	
1.61	4.00	1.20	.45	1.33	.35	.161	3.560	.880	
40.89	101.6	30.48	11.43	33.78	8.89	4.09	90.42	22.35	
K	L	M	N	P	Q	R	S	T	wt.
.36	.22	.44	1.56	1.06	.80	3.12	.06	.59	grams
9.14	5.59	11.18	39.62	26.92	20.32	79.25	1.52	14.99	250.0



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. B
M96776
ED-7188/1
ZSWA-4-30DR
LC/TD/CP
050210