




Pin Type **PK-27N35EPQ , PF-27N35EPQ , PL-27N35EPQ**

Dimensions and material

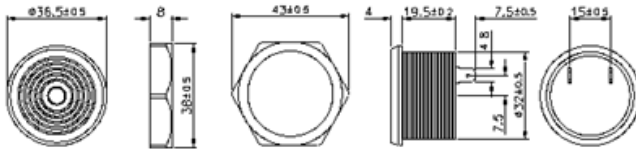

UNIT:mm

Electrical Characteristics

Model Number	PK-27N35EPQ	PF-27N35EPQ	PL-27N35EPQ	Unit
Resonant Frequency		3.5 ± 0.5		KHz
Operating Voltage		$3.0 \sim 28$		VDC
Rated Voltage		12		VDC
Sound Pressure Level(Min)		90 at 30cm at Rated Voltage		dB
Current Consumption(Max)		15 at Rated Voltage		mA
Tone Sweep(Pulse)Rate at Rated Voltage(Hz) $\pm 20\%$	Constant	Fast Pulse 3.0	Slow Pulse 1.2	
Operating Temperature		$-20 \sim +70$		$^{\circ}\text{C}$
Storage Temperature		$-30 \sim +80$		$^{\circ}\text{C}$

Voltage/Current/Sound Pressure

