




**DB LECTRO**  
COMPOSANTS ÉLECTRONIQUES  
ELECTRONIC COMPONENTS



**Pin Type** PK-35A29EPQ , PF-35A29EPQ , PL-35A29EPQ

## Dimensions and material

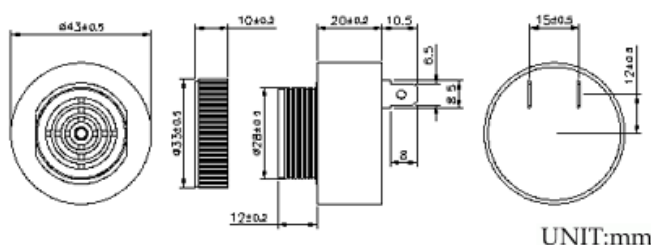

## Electrical Characteristics

Model Number	PK-35A29EPQ	PF-35A29EPQ	PL-35A29EPQ	Unit
Resonant Frequency		2.9 ± 0.5		KHz
Operating Voltage		3.0~24		VDC
Rated Voltage		12		VDC
Sound Pressure Level(Min)		95 at 30cm at Rated Voltage		dB
Current Consumption(Max)		10 at Rated Voltage		mA
Tone Sweep(Pulse)Rate at Rated Voltage(Hz) ± 20 %	Constant	Fast Pulse 3.0	Slow Pulse 1.2	
Operating Temperature		-20 ~ +70		°C
Storage Temperature		-30 ~ +80		°C

## Voltage/Current/Sound Pressure

