


A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.

SURFACE MOUNT CHIP LED LAMPS


Top View With Full Color LEDs

Part Number: 67-23SURSUGSUBC

Package outlines & Re-flow Profile

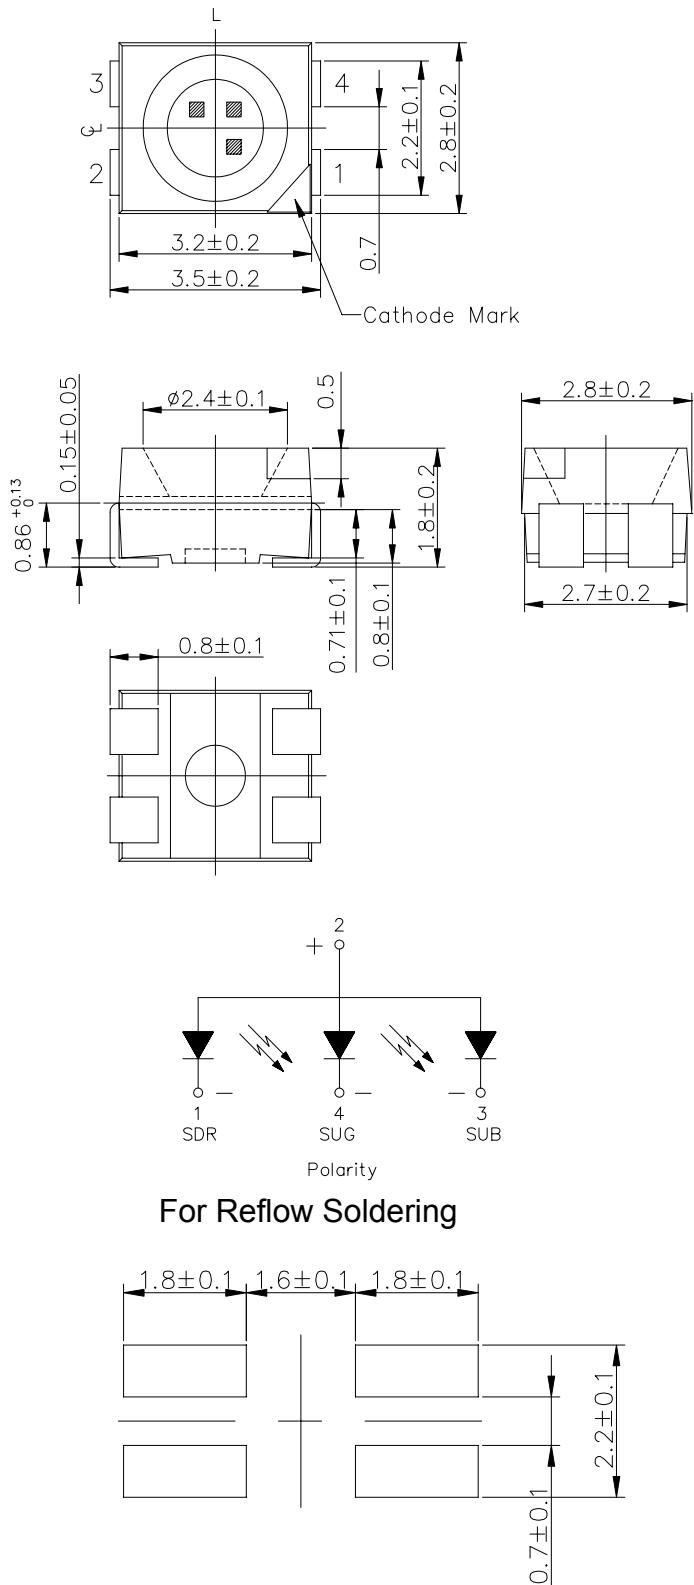

■Reflow Temp/Time

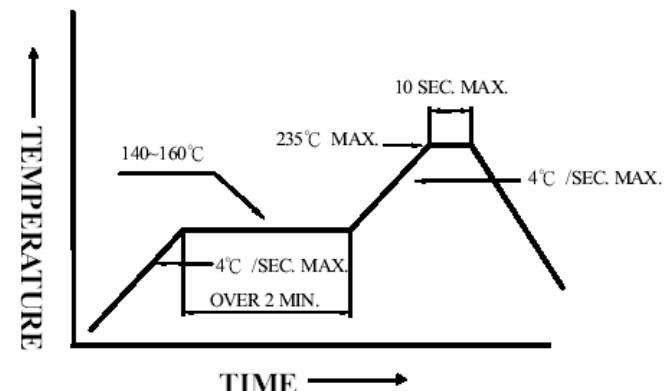

■Soldering iron

Basic spec is ≤ 5 sec when 260°C. If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow -1$ sec). Power dissipation of iron should be smaller than 15W, and temperatures should be controllable .Surface temperature of the device should be under 230°C .

ITEM	MATERIALS
Resin (mold)	Epoxy
Lens color	Water Clear
Printed circuit board	BT
Dice	AlGaN InGaN InGaN
Emitted color	Super Amber Super Green Super Blue

NOTES:

- All dimensions are in millimeters (inches).
- Tolerances are $\pm 0.1\text{mm}$ (0.004inch) unless otherwise noted.
- Polarity referring onto the cathode mark is reversed on the red.



A-BRIGHT INDUSTRIAL CO., LTD.

SURFACE MOUNT CHIP LED LAMPS

Part Number: 67-23SURSUGSUBC

ELECTRO-OPTICAL CHARACTERISTICS

($T_A=25^\circ C$)

Parameter	Emitted Color	Test Condition	Symbol	Value			Unit
				MIN.	TYP.	MAX.	
Forward voltage	R	$I_F=20mA$	V_F	—	2.0	2.4	V
	G			—	3.5	4.3	
	B			—	3.5	4.3	
Luminous intensity	R	$I_F=20mA$	I_V	100	160	—	mcd
	G			190	280	—	
	B			45	70	—	
Wavelength	R	$I_F=20mA$	λ_p	—	632	—	nm
	G			—	530	—	
	B			—	470	—	
	R	$I_F=20mA$	λ_d	—	625	—	
	G			—	525	—	
	B			—	470	—	
Spectral Line Half-Width	R	$I_F=20mA$	$\Delta\lambda$	20			nm
	G			30			
	B			30			
Peak pulsing current (1/10 duty f=1kHz)	R	$I_F=20mA$	I_{FP}	100			mA
	G						
	B						
Power Dissipation	R	$I_F=20mA$	P_D	120			mW
	G						
	B						

Absolute maximum ratings

($T_A=25^\circ C$)

Parameter	Symbol	Value	Unit
Viewing angle at 50% I_V	$2\theta_{1/2}$	120	Deg
Forward current	I_F	30	mA
Reverse voltage	V_R	5	V
Reverse current	I_R	100	μA
Operating temperature range	Top	-25 ~+80	$^\circ C$
Storage temperature range	Tstg	-30 ~+85	$^\circ C$

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.

SURFACE MOUNT CHIP LED LAMPS

Part Number: 67-23SURSUGSUBC

Test items and results of reliability

Classification	Test Item	Reference Standard	Test Conditions	Result
Endurance Test	Operation Life	MIL-STD-750:1026 MIL-STD-883:1005 JIS C 7021 :B-1	Connect with a power If=20mA Ta=Under room temperature Test time=1,000hrs	0/20
	High Temperature Storage	MIL-STD-202:103B JIS C 7021 :B-11	Ta=+65°C ±5°C RH=90%-95% Test time=240hrs	0/20
	High Temperature Storage	MIL-STD-883:1008 JIS C 7021 :B-10	High Ta=+85°C ±5°C Test time=1,000hrs	0/20
	Low Temperature Storage	JIS-C-7021 :B-12	Low Ta=-35°C ±5°C Test time=1,000hrs	0/20
Environmental Test	Temperature Cycling	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS C 7021 :A-4	-35°C ~ +25°C ~ +85°C ~ +25°C 60min 20min 60min 20min Test Time=5cycle	0/20
	Thermal Shock	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011	-35°C ±5°C ~+85°C ±5 °C 20min 20min Test Time=10cycle	0/20
	Solder Resistance	MIL-STD-202:201A MIL-STD-750:2031 JIS C 7021 :A-1	Preheating : 140°C -160°C,within 2 minutes. Operation heating : 235°C (Max.), within 10seconds. (Max.)	0/20



* Refer to reliability test standard specification for in this line.

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT CHIP LED LAMPS

Part Number: 67-23SURSUGSUBC

Typical Electro-Optical Characteristic Curves

◆ TYPICAL ELECTRICAL-OPTICAL CHARACTERISTICS CURVES

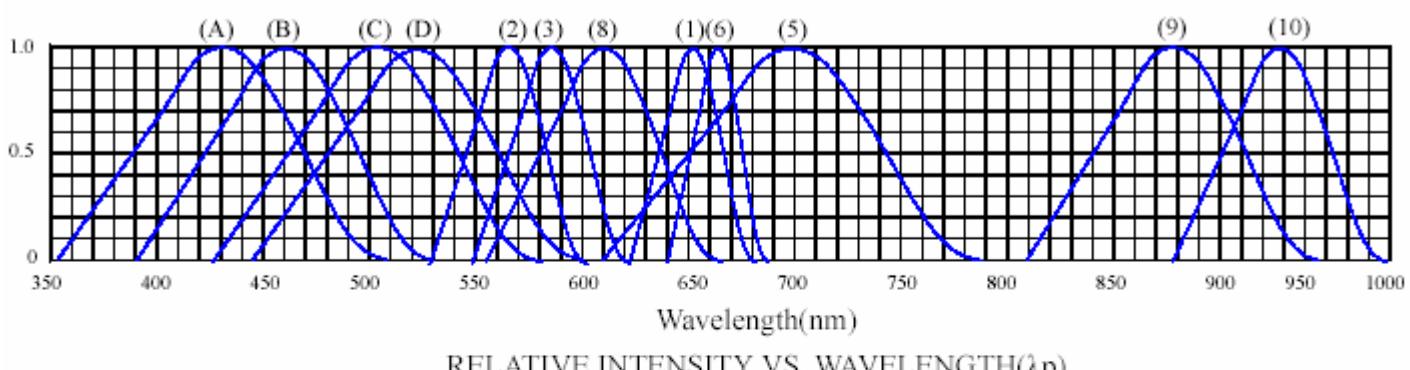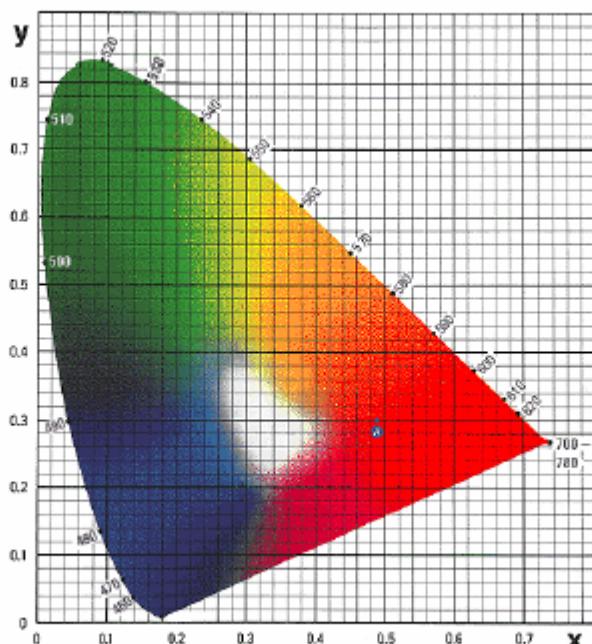

- (1) GaAsP/GaAs 655nm/Red
- (2) GaP 568nm/ Yellow Green
- (3) GaAsP/GaP 585nm/Yellow
- (4) GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) GaP 700nm/Bright Red
- (6) GaAlAs/GaAs 660nm/Super Red
- (8) GaAsP/GaP 610nm/Super Red

- (9)- GaAlAs 880nm
- (10)-GaAs/GaAs&GaAlAs/GaAs 940nm
- (A)- GaN 430nm/Blue
- (B)- InGaN 470nm/Blue
- (C)- InGaN 502nm/Ultra Green
- (D)- InGaN 523nm/Ultra Green

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.

SURFACE MOUNT CHIP LED LAMPS

Part Number: 67-23SURSUGSUBC

Typical Electro-Optical Characteristic Curves

◆ CHARACTERISTICS DIAGRAMS

