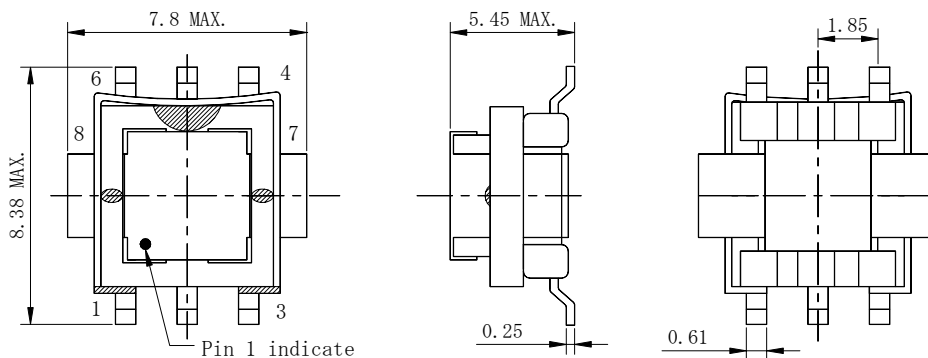




Type: CEEH55
◆ Product Description

- 8.38×7.8mm Max.(L×W), 5.45mm Max. Height .
- Custom design is available.

◆ Feature

- Low profile SMD type.
- Low primary DCR version.
- Current rating: up to 10A.
- Operating Frequency range: 50kHz~1MHz.
- RoHS Compliance


◆ Dimensions (mm)

◆ Land Pattern

◆ Schematics (Bottom)

◆ Specification

| NO. | PART NO. | Turns Ratio | Inductance (mH) 1-3 [MIN.] | D.C.R.(mΩ) [at20°C] [MAX.] | | Rated Current(A) | HI-POT (Vrms) 1,3to 7,8 | STAMP |
|-----|----------|-------------|----------------------------|----------------------------|-------|------------------|-------------------------|-------|
| | | | | 8-7 | 1-3 | | | |
| 01 | S020A | 1:20 | 0.08 | 6 | 550 | 10 | 500 | 1 |
| 02 | S030A | 1:30 | 0.18 | 6 | 870 | 10 | 500 | 2 |
| 03 | S040A | 1:40 | 0.32 | 6 | 1140 | 10 | 500 | 3 |
| 04 | S050A | 1:50 | 0.50 | 6 | 1500 | 10 | 500 | 4 |
| 05 | S060A | 1:60 | 0.72 | 6 | 1750 | 10 | 500 | 5 |
| 06 | S070A | 1:70 | 0.98 | 6 | 4750 | 10 | 500 | 6 |
| 07 | S100A | 1:100 | 2.00 | 6 | 5500 | 10 | 500 | 7 |
| 08 | S125A | 1:125 | 3.00 | 6 | 6500 | 10 | 500 | 8 |
| 09 | S150A | 1:150 | 4.32 | 6 | 15400 | 10 | 500 | 9 |
| 10 | S200A | 1:200 | 8.00 | 6 | 32700 | 10 | 500 | 0 |