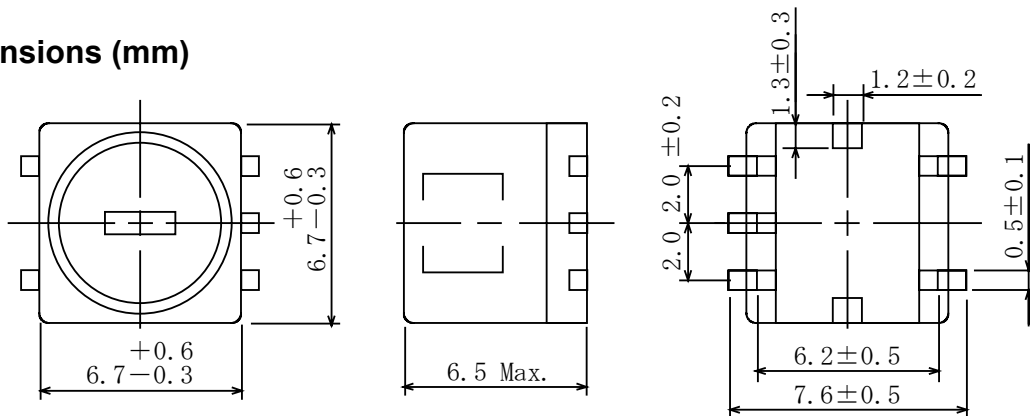


Type: CMG65
◆ Product Description


- 8.1×7.3mm Max.(L×W), 6.5mm Max. Height.
- Inductance:27mH Max.
- Operating frequency:10~250kHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


◆ Feature

- Variable shielded high inductance type.
- RoHS Compliance

◆ Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch shall be measured at the root of terminal.

◆ Connection (Bottom View)

◆ Specification

Item	(4 - 6)	Measuring Condition
Inductance	6.0 mH ± 10% Variable	252 kHz
Unloaded Q	40 Min.	252 kHz