

QUADRATURE HYBRID MODEL SLQ-K07

OCTAVE BANDWIDTH


225 - 400 MHz

SPECIFICATIONS

Operating Frequency:	225 - 400 MHz	Input Power Rating:	1 Watt (Max)
Insertion Loss:	0.4 dB (Typ)/0.75 dB (Max)	Impedance:	50 Ohms
Amplitude Unbalance:	0.6 dB (Typ)/1.2 dB (Max)	VSWR :	1.3:1 (Max)
Phase Unbalance:	2° (Typ)/ 4° (Max)	Operating Temp. Range:	-20° to +70°C
Isolation:	25 dB (Typ)/17 dB (Min)		



MECHANICAL OUTLINE: 159

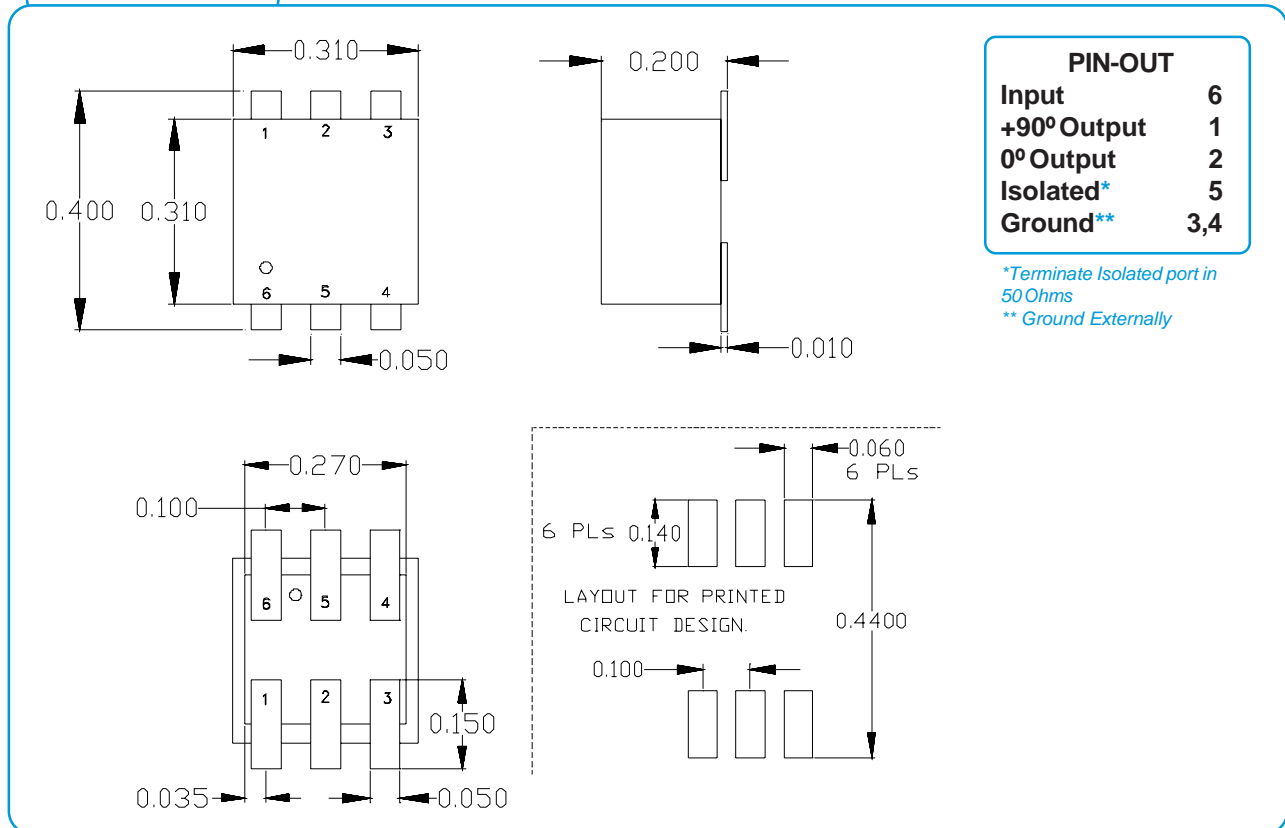

QUADRATURE HYBRID MODEL SLQ-K07

OCTAVE BANDWIDTH

225 - 400 MHz

PERFORMANCE PLOTS

