

HAF2001

Silicon N Channel MOS FET Series
Power Switching

HITACHI

ADE-208-353 D (Z)
5th. Edition
October 1997

Features


This FET has the over temperature shut-down capability sensing to the junction temperature.

This FET has the built-in over temperature shut-down circuit in the gate area. And this circuit operation to shut-down the gate voltage in case of high junction temperature like applying over power consumption, over current etc.

- Logic level operation (4 to 6 V Gate drive)
- High endurance capability against to the short circuit
- Built-in the over temperature shut-down circuit
- Latch type shut-down operation (Need 0 voltage recovery)

Outline

TO-220AB

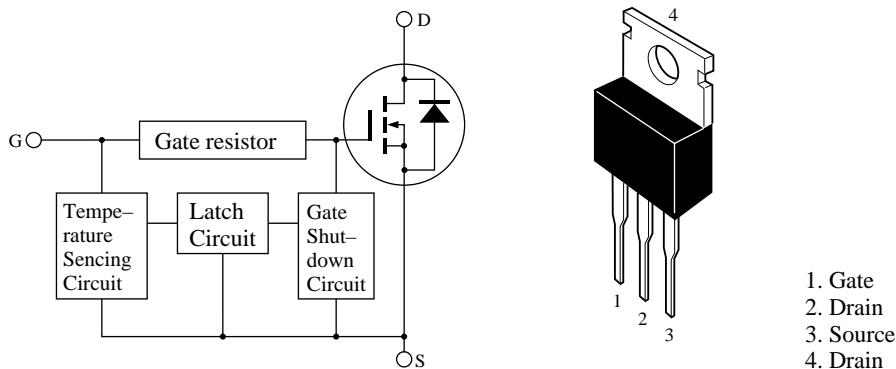

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V _{DSS}	60	V
Gate to source voltage	V _{GSS}	16	V
Gate to source voltage	V _{GSS}	-2.8	V
Drain current	I _D	20	A
Drain peak current	I _{D(pulse)} ^{Note1}	40	A
Body-drain diode reverse drain current	I _{DR}	20	A
Channel dissipation	P _{ch} ^{Note2}	50	W
Channel temperature	T _{ch}	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

Note: 1. PW ≤ 10μs, duty cycle ≤ 1 %

2. Value at Ta = 25°C

Typical Operation Characteristics

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Input voltage	V _{IH}	3.5	—	—	V	
	V _{IL}	—	—	1.2	V	
Input current (Gate non shut down)	I _{IH1}	—	—	100	μA	Vi = 8V, V _{DS} = 0
	I _{IH2}	—	—	50	μA	Vi = 3.5V, V _{DS} = 0
	I _{IL}	—	—	1	μA	Vi = 1.2V, V _{DS} = 0
Input current (Gate shut down)	I _{IH(sd)1}	—	0.8	—	mA	Vi = 8V, V _{DS} = 0
	I _{IH(sd)2}	—	0.35	—	mA	Vi = 3.5V, V _{DS} = 0
Shut down temperature	T _{sd}	—	175	—	°C	Channel temperature
Gate operation voltage	V _{OP}	3.5	—	13	V	





Electrical Characteristics (Ta = 25°C)





Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Drain current	I _{D1}	10	—	—	A	V _{GS} = 3.5V, V _{DS} = 2V
Drain current	I _{D2}	—	—	10	mA	V _{GS} = 1.2V, V _{DS} = 2V
Drain to source breakdown voltage	V _{(BR)DSS}	60	—	—	V	I _D = 10mA, V _{GS} = 0
Gate to source breakdown voltage	V _{(BR)GSS}	16	—	—	V	I _G = 100μA, V _{DS} = 0
Gate to source breakdown voltage	V _{(BR)GSS}	-2.8	—	—	V	I _G = -100μA, V _{DS} = 0
Gate to source leak current	I _{GSS1}	—	—	100	μA	V _{GS} = 8V, V _{DS} = 0
	I _{GSS2}	—	—	50	μA	V _{GS} = 3.5V, V _{DS} = 0
	I _{GSS3}	—	—	1	μA	V _{GS} = 1.2V, V _{DS} = 0
	I _{GSS4}	—	—	-100	μA	V _{GS} = -2.4V, V _{DS} = 0
Input current (shut down)	I _{GS(op)1}	—	0.8	—	mA	V _{GS} = 8V, V _{DS} = 0
	I _{GS(op)2}	—	0.35	—	mA	V _{GS} = 3.5V, V _{DS} = 0
Zero gate voltage drain current	I _{DSS}	—	—	250	μA	V _{DS} = 50 V, V _{GS} = 0
Gate to source cutoff voltage	V _{GS(off)}	1.0	—	2.25	V	I _D = 1mA, V _{DS} = 10V
Static drain to source on state resistance	R _{DS(on)}	—	50	65	mΩ	I _D = 10A, V _{GS} = 4V ^{Note3}
Static drain to source on state resistance	R _{DS(on)}	—	30	43	mΩ	I _D = 10A, V _{GS} = 10V ^{Note3}
Forward transfer admittance	y _{fs}	6	12	—	S	I _D = 10A, V _{DS} = 10V ^{Note3}
Output capacitance	C _{oss}	—	630	—	pF	V _{DS} = 10V, V _{GS} = 0 f = 1 MHz
Turn-on delay time	t _{d(on)}	—	7.5	—	μs	I _D = 5A, V _{GS} = 5V
Rise time	t _r	—	29	—	μs	R _L = 6Ω
Turn-off delay time	t _{d(off)}	—	34	—	μs	
Fall time	t _f	—	26	—	μs	
Body-drain diode forward voltage	V _{DF}	—	1.0	—	V	I _F = 20A, V _{GS} = 0
Body-drain diode reverse recovery time	t _{rr}	—	110	—	ns	I _F = 20A, V _{GS} = 0 diF/dt = 50A/μs
Over load shut down operation time ^{Note4}	t _{os1}	—	1.8	—	ms	V _{GS} = 5V, V _{DD} = 12V
	t _{os2}	—	0.7	—	ms	V _{GS} = 5V, V _{DD} = 24V





Note: 3. Pulse test





4. Include the time shift based on increasing of channel temperature when operate under over load condition.


Main Characteristics

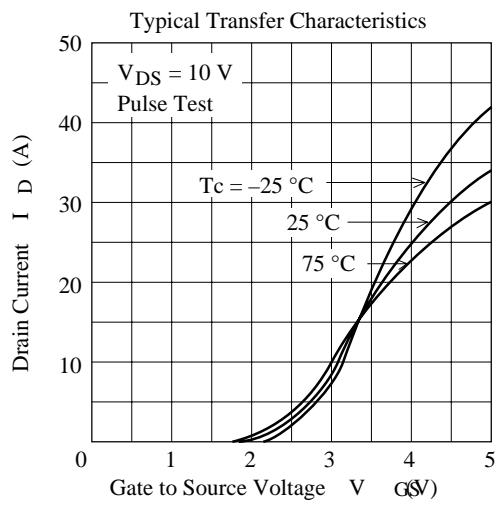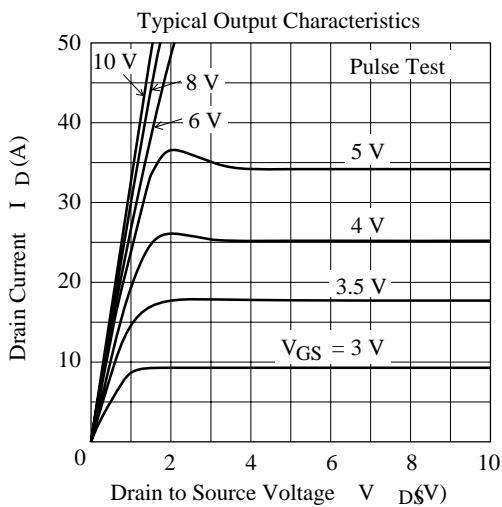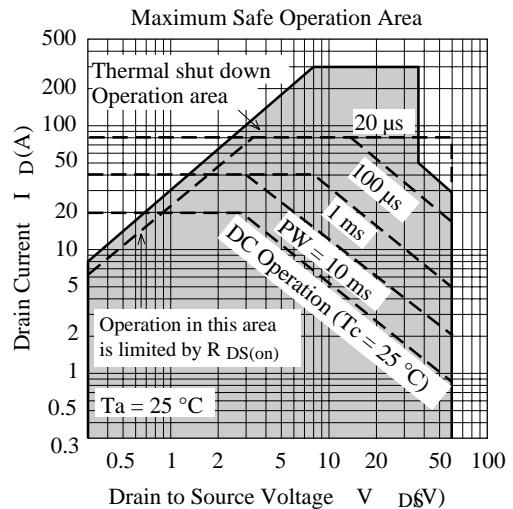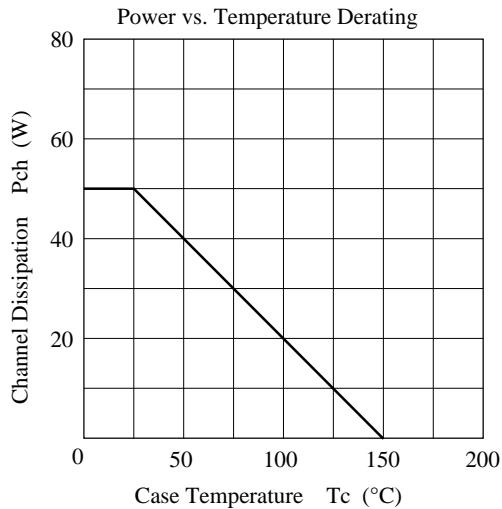

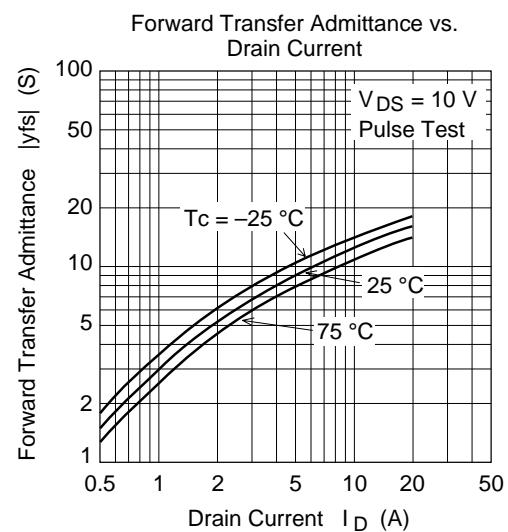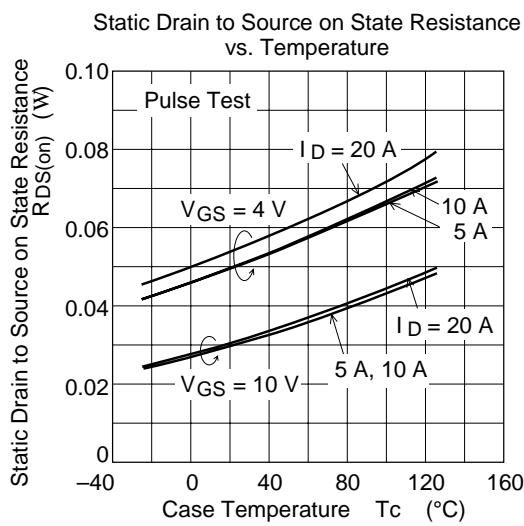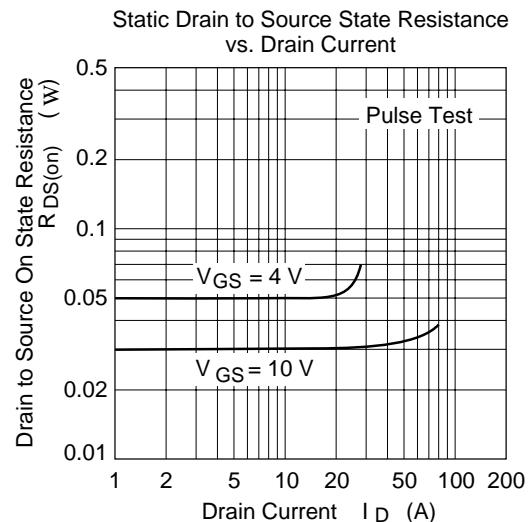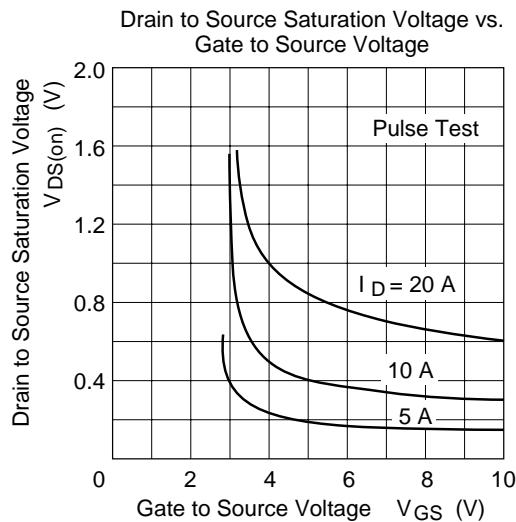


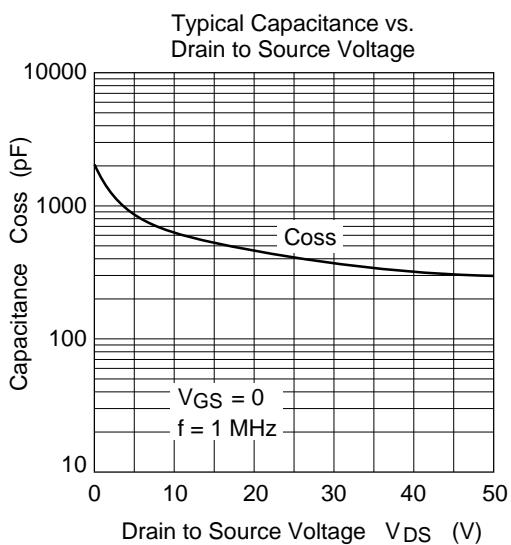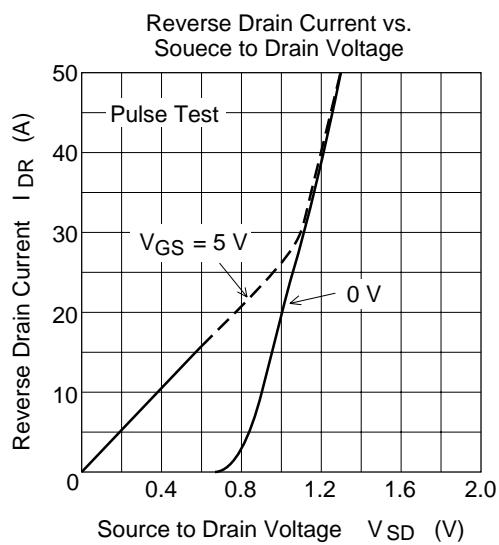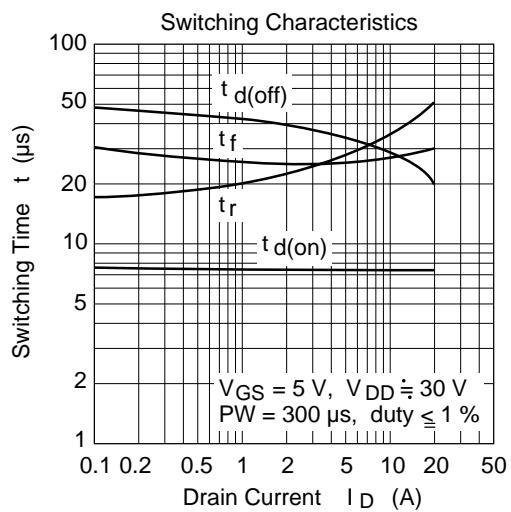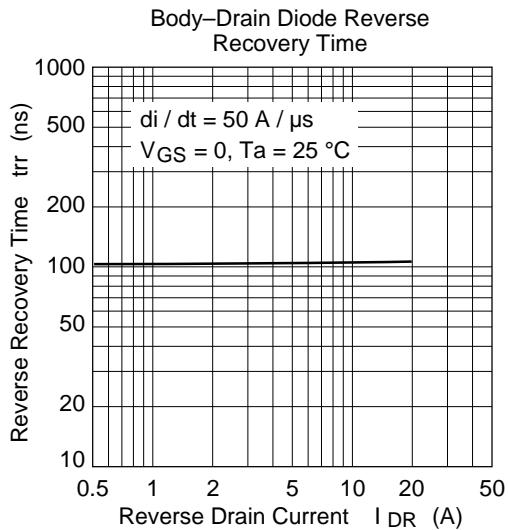

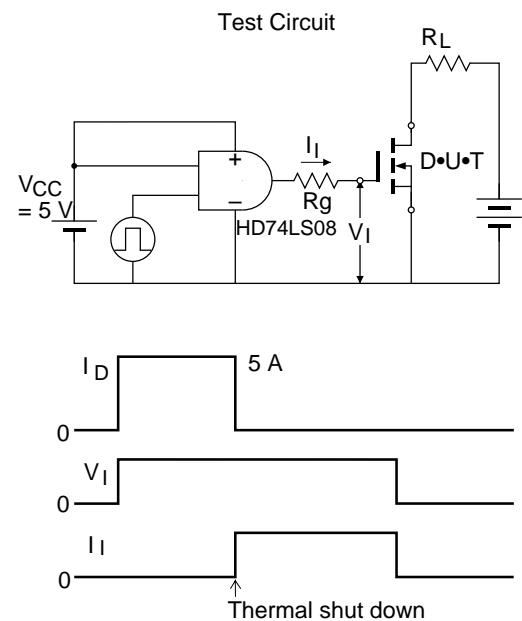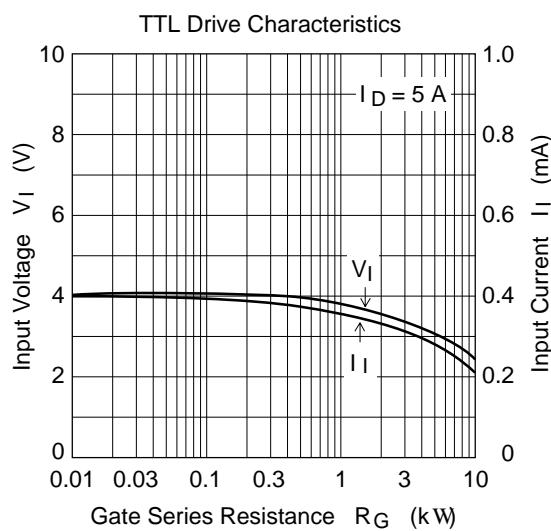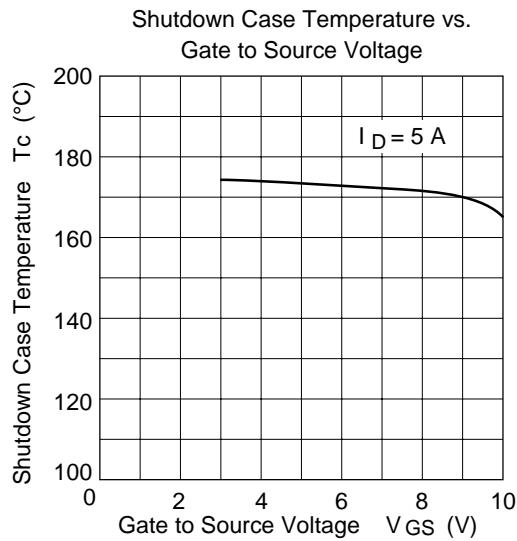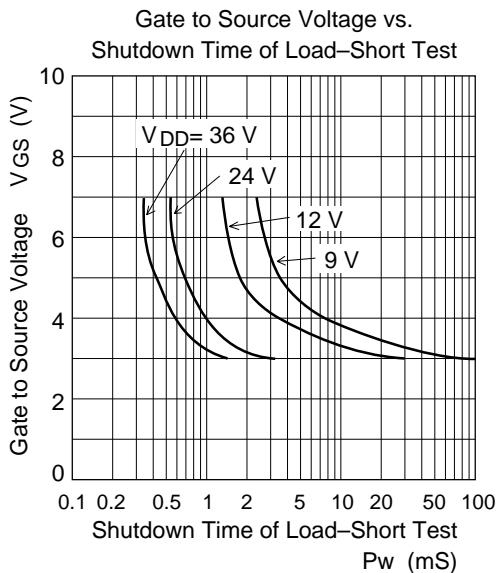



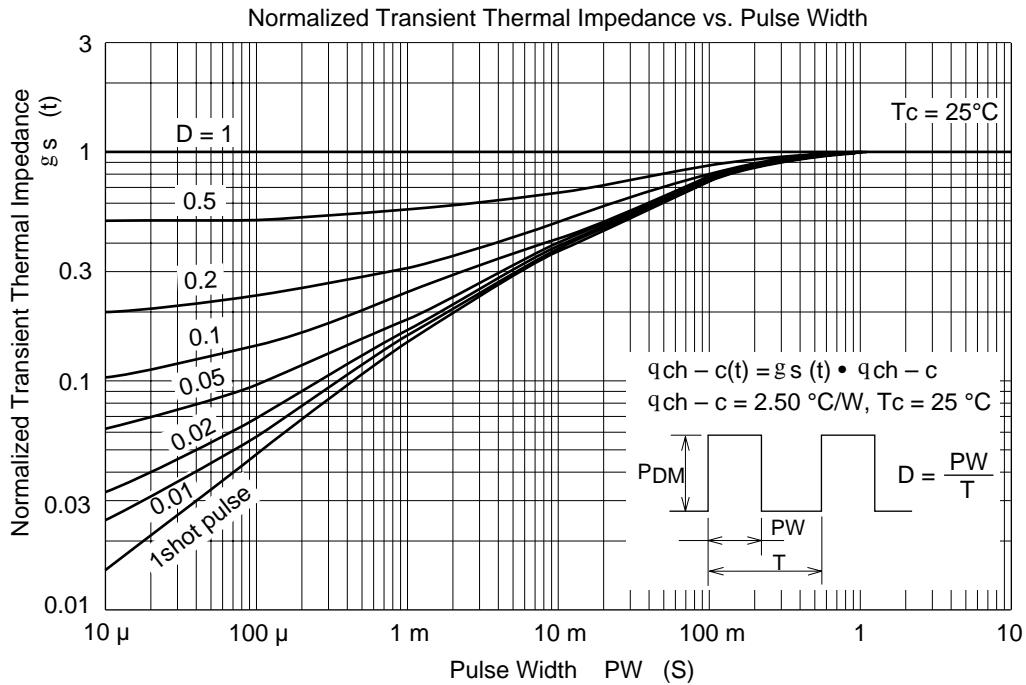


Switching Time Test Circuit

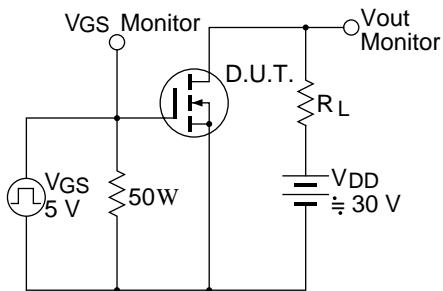

Waveform

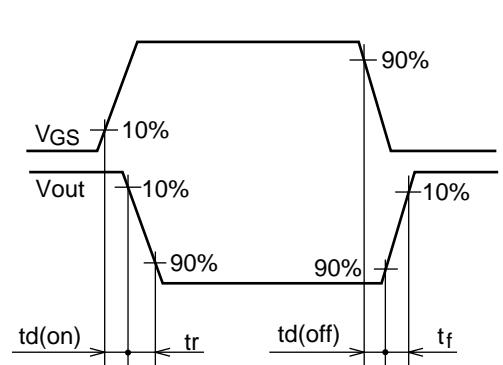

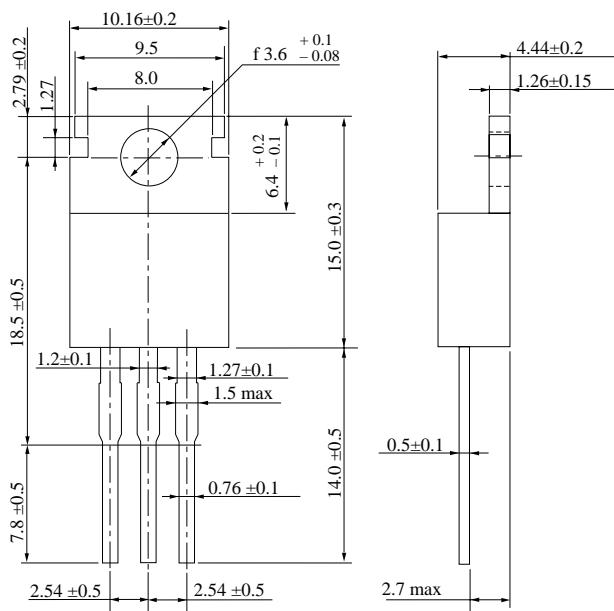Package Dimensions**Unit: mm**

Hitachi Code	TO-220AB
EIAJ	SC-46
JEDEC	—

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	: http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	: http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	: http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1>(408) 433-0223

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX