


General Purpose PIN Diode

KAP50-03(BAP50-03)

■ Features

- Low diode capacitance.
- Low diode forward resistance.

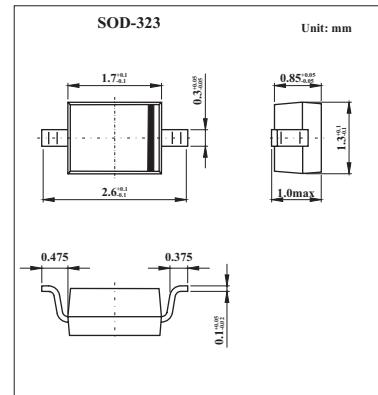

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Continuous reverse voltage	V _R	50	V
Continuous forward current	I _F	50	mA
Total power dissipation Ts = 90°C	P _{tot}	500	mW
Storage temperature	T _{stg}	-65 to +150	°C
Junction temperature	T _j	150	°C
Thermal resistance from junction to soldering point	R _{th j-s}	85	K/W

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Forward voltage	V _F	I _F = 50 mA		0.95	1.1	V
Reverse voltage	V _R	I _R = 10 µA	50			V
Reverse current	I _R	V _R = 50 V			100	nA
Diode capacitance	C _d	V _R = 0; f = 1 MHz		0.4		pF
		V _R = 1 V; f = 1 MHz		0.3	0.55	pF
		V _R = 5 V; f = 1 MHz		0.2	0.35	pF
Diode forward resistance	r _D	I _F = 0.5 mA; f = 100 MHz	25	40		Ω
		I _F = 1 mA; f = 100 MHz	14	25		Ω
		I _F = 10 mA; f = 100 MHz	3	5		Ω

■ Marking

Marking	A5
---------	----

KAP50-03(BAP50-03)

■ Typical Characteristics

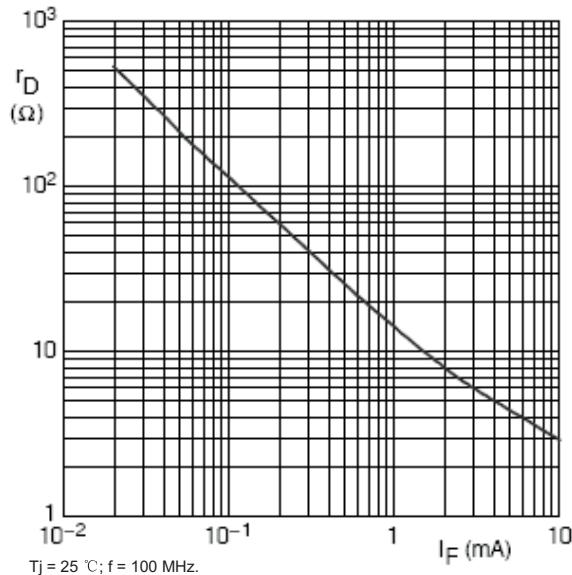


Fig.1 Forward resistance as a function of forward current; typical values.


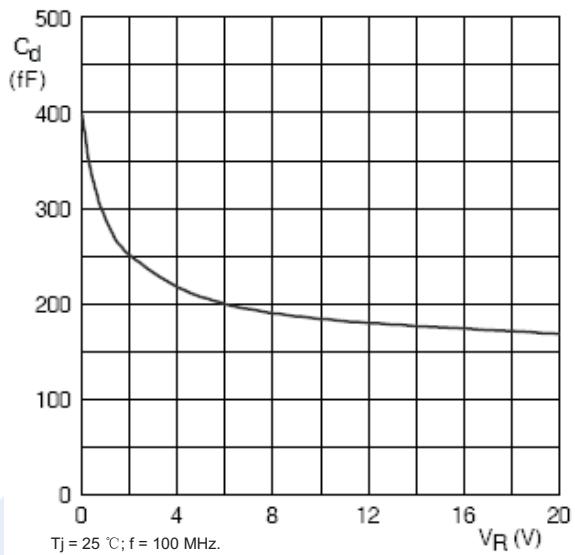


Fig.2 Diode capacitance as a function of reverse voltage; typical values.

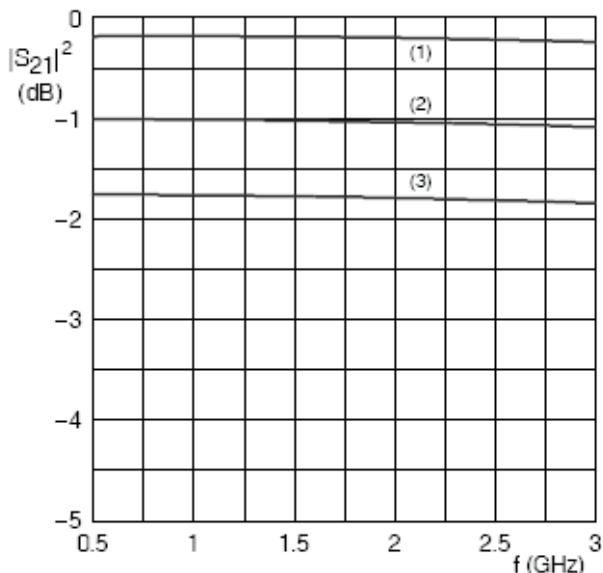

(1) IF = 10 mA. (2) IF = 1 mA. (3) IF = 0.5 mA.
Diode inserted in series with a 50Ω stripline circuit and biased via t
analyzer Tee network.
 $T_{amb} = 25^\circ\text{C}$.

Fig.3 Insertion loss ($|S_{21}|^2$) of the diode as a
function of frequency; typical values.

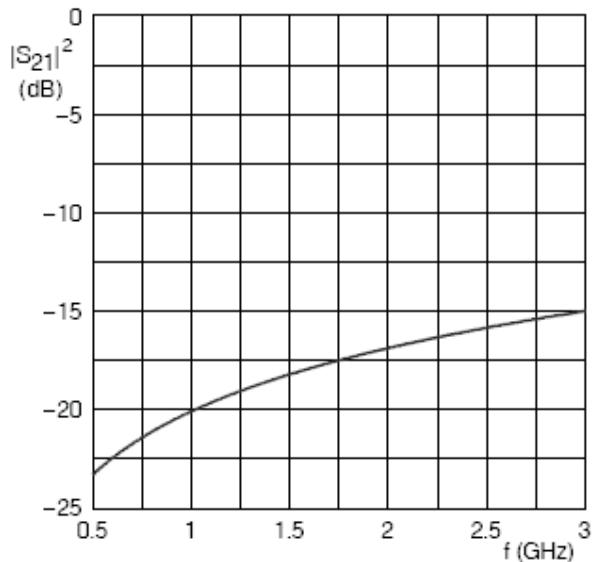


Fig.4 Isolation ($|S_{21}|^2$) of the diode as a function of
frequency; typical values.