



## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL					
Characteristics	Conditions	min.	typ.	max.	unit
Isolation voltage	Input / Output	3,000			VAC
Isolation resistance	Input / Output, @ 500VDC	100			MΩ
Ambient temperature	Operating at Vi nom	-25		+ 71	°C
Derating	Vi nom, from +61°C to +71°C			2.5	% / °C
Storage temperature	Non operational	-25		+ 85	°C
Relative humidity	Vi nom, lo nom	20		90	% RH
Dimension	L90 x W40.5 x D115				mm
Cooling	Free air convection				
Case material	Plastic				

INPUT SPECIFICATIONS					
Characteristics	Conditions	min.	typ.	max.	unit
Rated input voltage	lo nom	100		240	VAC
Input voltage range	Ta min ... Ta max, lo nom	AC in	85	264	VAC
		DC in	90	375	VDC
Line frequency	Vi nom, lo nom	47		63	Hz
Inrush current	lo nom	Vi : 115VAC		30	A
		Vi : 230VAC		60	A

OUTPUT SPECIFICATIONS					
Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, lo min ... lo nom			± 1	%
Minimum load	Vi nom	0			%
Line regulation	lo nom, Vi min ... Vi max			0.5	%
Load regulation	Vi nom, lo min ... lo nom			0.5	%
Turn on time	After AC is applied to input at full resistive load			1,000	ms
Voltage fall time	lo nom, Vo=95% ~ 10% rated voltage			150	ms
Voltage rise time	At full resistive load			150	ms
Hold up time	lo nom	Vi : 115VAC	20		ms
		Vi : 230VAC	30		ms
Ripple & noise	Vi nom, lo nom, BW = 20MHz			50	mV
Voltage trim range	Vi nom, Wo =60W max	12V model	12	14	VDC
	Vi nom, Wo =60W max	24V model	24	28	VDC
	Vi nom, Wo =60W max	48V model	48	55	VDC
Rdy on / DC ON indicator threshold at start up	Vi nom, lo nom	12V model	10.4 / 9.1	11.4 / 10.1	VDC
		24V model	21.2 / 18.7	22.2 / 19.7	VDC
		48V model	42.8 / 36.5	43.8 / 37.5	VDC
Rdy off threshold after start up	Vi nom, lo nom	12V model	10.3	11.3	VDC
		24V model	21.1	22.1	VDC
		48V model	42.7	43.7	VDC

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### CONTROL AND PROTECTION


Characteristics	Conditions	min.	typ.	max.	unit
Rated over load protection	Vi nom	105		125	%
Over voltage protection	Vi nom, Io nom	12V model	15	16.5	VDC
		24V model	30	33	VDC
		48V model	60	66	VDC
Output short circuit	Vi nom, Io nom	Fold forward			

### APPROVALS AND STANDARDS

UL / cUL	UL508 Listed UL1310 Class 2 power supply (12V w/o class 2), UL60950-1 Recognized
TUV	EN60950-1
CE	EN61000-6-3, EN55022 Class B EN61000-3-2, EN61000-3-3 EN61000-6-2, EN55024, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11

## MECHANISM & PIN CONFIGURATION

mm [inch]

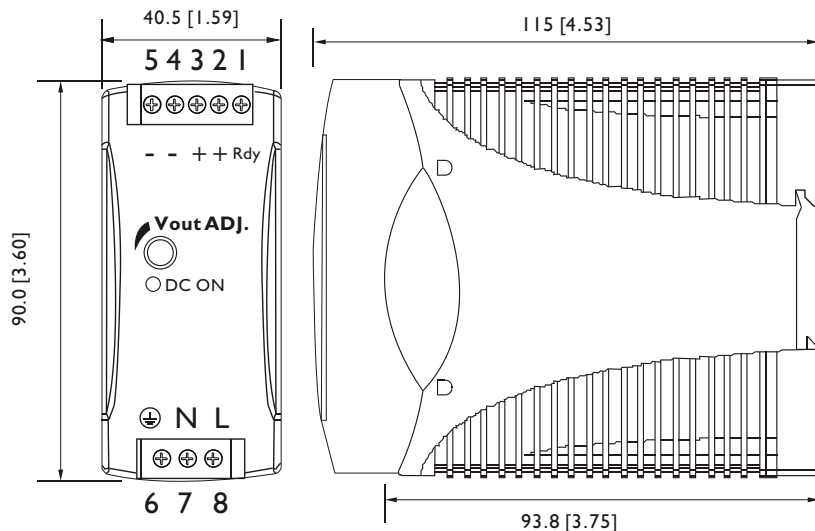


### CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail; no tools required even to remove

### INSTALLATION

Ventilation / Cooling  
Normal convection  
All sides 25mm free space  
For cooling recommended  
Connector size range  
Solid: 0.2-2.0mm<sup>2</sup> (AWG24-14)  
(use copper conductors only)

## CIRCUIT SCHEMATIC

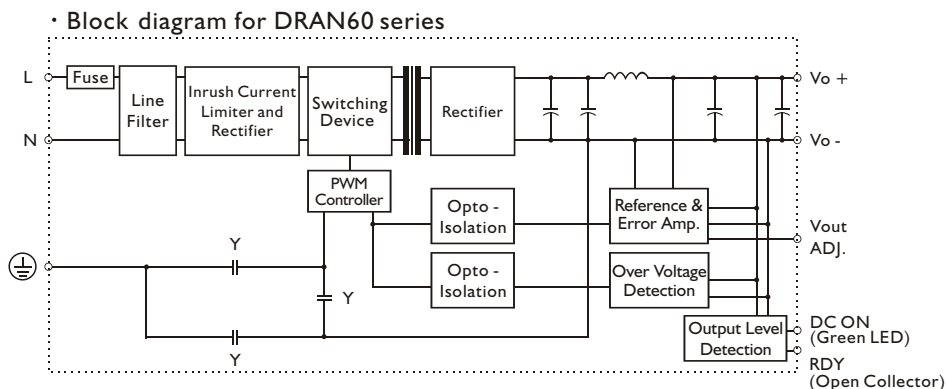

## PHYSICAL CHARACTERISTICS

CASE SIZE	90 x 40.5 x 115 mm 3.6 x 1.59 x 4.53 inches
CASE MATERIAL	Plastic
WEIGHT	360g

## PIN ASSIGNMENT

PIN NO.	Designation	Description
1	RDY	DC OK output for relay
2	+	Positive output terminal
3	+	Positive output terminal
4	-	Negative output terminal
5	-	Negative output terminal
6	⊕	Ground this terminal to minimize high-frequency emissions
7	N	Input terminals (neutral conductor, no polarity at DC input)
8	L	Input terminals (phase conductor, no polarity at DC input)
	Vout ADJ.	Trimmer-potentiometer for Vout adjustment
	DC ON	Operation indicator LED

## DERATING

