


# CRYSTAL CONTROLLED OSCILLATORS

## 14 PIN DIP 5.0V STRATUM 3 HCMOS OCXO



### ABSOLUTE MAXIMUM RATINGS

TABLE 1.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-40	-	85	°C	
Supply Voltage	(Vcc)	-0.5	-	7.0	Vdc	

### OPERATING SPECIFICATIONS

TABLE 2.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Center Frequency	(Fo)	2.50	-	38.88	MHz	
Frequency Calibration		-1.0	-	1.0	ppm	1, 4
Frequency vs. change in Temperature		-0.25	-	0.25	ppm	2
Frequency vs. change in Supply Voltage		-0.05	-	0.05	ppm	3
Aging (Daily)		-15	-	15	ppb/day	4
Aging (1 <sup>st</sup> Year)		-0.7	-	0.7	ppm	
Total Frequency Tolerance		-2.5	-	2.5	ppm	5
Operating Temperature Range		0	-	70	°C	
Supply Voltage	(Vcc)	4.75	5.00	5.25	Vdc	
Supply Current	(Icc)	-	-	300	mA	
Jitter (BW=10Hz to 20MHz)		-	-	3	ps rms	
Allan Variance (1 second)		-	5.00E-10	-		
SSB Phase Noise at 10Hz offset		-	-90	-	dBc/Hz	
SSB Phase Noise at 10KHz offset		-	-130	-	dBc/Hz	
Start Up Time: Oscillator		-	-	10	mS	
Warm Up Time		-	-	5	Minutes	6
TDEV @ 1.0 Sec.		-	-	1	nS	
TDEV @ 4.0 Sec.		-	-	2	nS	

### HCMOS OUTPUT CHARACTERISTICS

TABLE 3.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
LOAD		-	-	15	pf	
Voltage (High)	(Voh)	4.5	-	-	Vdc	
(Low)	(Vol)	-	-	0.4	Vdc	
Current (High)	(Ioh)	-4	-	-	mA	
(Low)	(Ioh)	-	-	4	mA	
Duty Cycle at 50% of Vcc		45	50	55	%	
Rise / Fall Time 10% to 90%		-	-	6	nS	

### PACKAGE CHARACTERISTICS

TABLE 4.0

Package	14 pin DIP, hermetically sealed, grounded case, welded package
---------	--

#### Notes:

- 1) Initial calibration @ 25°C.
- 2) Overall frequency stability, 0 to 70°C.
- 3) Frequency stability per 5% change in supply voltage.
- 4) At the time of shipment after 48 hours of operation.
- 5) Inclusive of calibration, operating temperature range, supply voltage change, load change, shock and vibration, 10 years aging.
- 6) Measured @ 25°C, within 5 minutes, the unit will be within +/-0.1ppm of its reference frequency, measured after 30 minutes of continuous operation at a stable 25°C

## DGOF5S3

### DESCRIPTION

The Connor-Winfield DGOF5S3 is a hermetically sealed 14 Pin DIP, 5.0V Oven Controlled Crystal Oscillator (OCXO) HCMOS/TTL Compatible. The DGOF5S3 is designed for a higher stability Stratum 3 application requiring low jitter and tight stability.

### FEATURES

- 5.0V OPERATION
- LOW JITTER <3pS RMS
- TEMPERATURE STABILITY ±0.25ppm
- FREQUENCY TOLERANCE OF ±2.5ppm OVER TEN YEARS

### ORDERING INFORMATION

DGOF5S3 - 33.333333MHz

OCXO  
SERIES

CENTER  
FREQUENCY

Specifications subject to change without notice.

# CRYSTAL CONTROLLED OSCILLATORS

## ENVIRONMENTAL CHARACTERISTICS

Temperature Cycle: Per MIL-STD-883, Method 1010, Condition B. -55°C to 125°C, 20 cycles, 10 minute dwell, 1 minute transition.

Gross Leak Test: Per MIL-STD-202, Method 112, Condition D. No bubbles in flourinert (FC-43) at 125°C ±5°C for 20 seconds.

## SOLDERING

Pin Solderability: Per MIL-STD-883, Method 200. 38 hour steam age prior to 254°C ±5°C Solder pot dip, 95% Coverage.

Resistance to Solder Heat: Per MIL-STD-202, Method 210, Condition C. Wave: Topside board-mount product, 260°C ±5°C for 20 Seconds.


## MECHANICAL CHARACTERISTICS

Vibration: Per MIL-STD-202, Method 204, Condition A. 10G's peak, 10Hz to 500Hz, 15 minute cycles 12 times each perpendicular axis.

Shock: Per MIL-STD-202, Method 213, Condition D. 500G's, 1ms, halfsine, 3 shocks per direction.

Moisture Resistance: Per MIL-STD-202, Method 106. 95% RH @ 65°C, 10 cycles 10°C to 65°C.

## PACKAGE OUTLINE

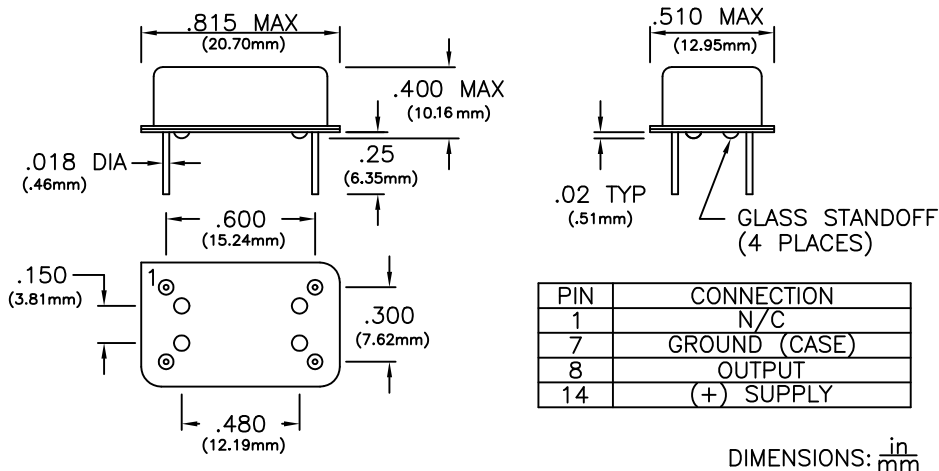

## TEST DIAGRAM

