


# Up to 180 mW Fiber Bragg Grating Stabilized 980 nm Pump Modules with Tight Tracking

## 2600-TE Series

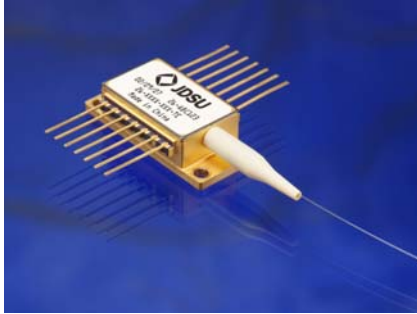

### Key Features

- High kink-free powers to 180 mW
- Low-profile, epoxy-free, and flux-free 14-PIN butterfly planar package
- Fiber Bragg grating stabilization
- Wavelength selection available
- Tight tracking of fiber-coupled power
- Integrated thermoelectric cooler, thermistor, and monitor diode
- High dynamic range
- Excellent low power stability

### Applications

- Erbium doped fiber amplifiers (EDFAs) without a front-fiber tab for tracking
- Dense wavelength division multiplexing (DWDM) EDFAs for small package designs
- High bit rate, high channel count EDFAs
- CATV distribution

### Compliance

- Telcordia GR-468-CORE

The JDSU 2600-TE Series 980 nm pump module utilizes a planar construction with chip on subcarrier. The high power JDSU laser chip is hermetically sealed in a low-profile, epoxy- and flux-free 14-pin butterfly package and fitted with a thermistor, thermoelectric cooler, and monitor diode. The module meets the stringent requirements of the telecommunications industry, including Telcordia™ GR-468-CORE for hermetic 980 nm pump modules.


The 2600-TE Series pump module uses fiber Bragg grating stabilization to “lock” the emission wavelength. It provides a noise-free narrowband spectrum, even under changes in temperature, drive current, and optical feedback. Wavelength selection is available for applications that require the highest performance in spectrum control with the highest available powers.

The 2600-TE Series design also offers tight tracking of fiber-coupled power via the monitor diode signal.

2


**Dimensions Diagram**  
**250 μm Bare Fiber Type A Wiring**

(Note: Specifications in mm unless otherwise noted; tolerance = .x ± .3, .xx ± .20  
The module pigtail consists of 250 μm buffered, Corning PureMode™ HI-1060 Single-mode fiber.)

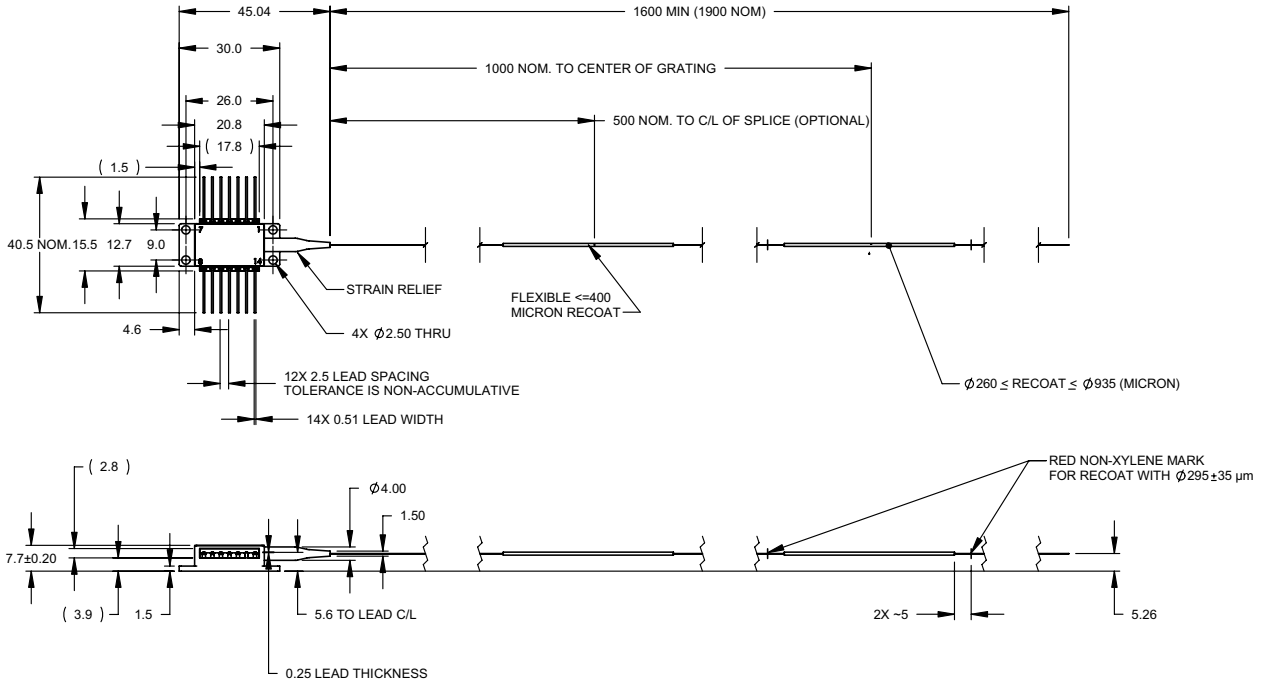

**Pinout**

Pin	Description
1	Cooler (+)
2	Thermistor
3	Monitor PD Anode
4	Monitor PD Cathode
5	Thermistor
6	N/C
7	N/C
8	N/C
9	N/C
10	Laser Anode
11	Laser Cathode
12	N/C
13	Case Ground
14	Cooler (-)

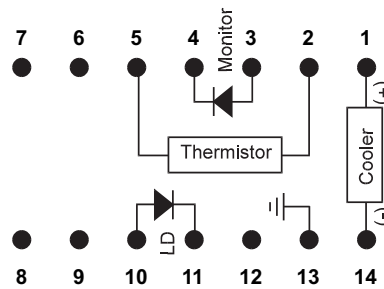

## 3

**Table 1: Absolute Maximum Ratings**

Parameter	Symbol	Test Conditions	Minimum	Maximum
Operating case temperature	T <sub>op</sub>	-	-5 °C	75 °C
Storage temperature	T <sub>stg</sub>	2000 hours	-40 °C	85 °C
LD submount temperature	T <sub>LD</sub>	-	0 °C	50 °C
LD reverse voltage	V <sub>r</sub>	-	-	2 V
LD forward current		-	-	650 mA
LD current transient		1 μs maximum	-	950 mA
LD reverse current		-	-	10 μA
PD reverse voltage	V <sub>PD</sub>	-	-	20 V
PD forward current	I <sub>PD</sub>	-	-	10 mA
Electrostatic discharge (ESD)	V <sub>ESD</sub>	C = 100 pF, R = 1.5 Ω, human body model	-	1000 V
TEC current	I <sub>TEC</sub>	-	-	2.5 A
TEC voltage	V <sub>TEC</sub>	-	-	4.0 V
Axial pull force		3 x 10 seconds	-	5 N
Side pull force		3 x 10 seconds	-	2.5 N
Fiber bend radius		-	16 mm	-
Relative humidity	R <sub>H</sub>	40 °C	5%	95%
Lead soldering time		260 °C	-	10 seconds

Note: Absolute maximum ratings are the maximum stresses that may be applied to the pump module for short periods of time without causing damage. Stresses in excess of the absolute maximum ratings can permanently damage the device. Exposure to absolute maximum ratings for extended periods, or exposure to more than one absolute maximum rating simultaneously may adversely affect device reliability.

**Table 2: Operating Parameters**(BOL, T<sub>case</sub> = 0 to 75 °C, T<sub>LD</sub> = 25 °C, -50 dB reflection, unless noted otherwise)

Product Code <sup>1</sup>	Maximum Operating Power P <sub>op</sub> (mW) <sup>2,3</sup>	Maximum Operating Current I <sub>op</sub> (mA) Maximum <sup>2</sup>	Minimum Kink-Free Power P <sub>max</sub> (mW) <sup>4</sup>	Kink-Free Current I <sub>max</sub> (mA) <sup>3</sup> Maximum <sup>4</sup>
26-xxxx-100-TE	90	240	100	260
26-xxxx-110-TE	100	240	110	260
26-xxxx-120-TE	110	260	120	270
26-xxxx-130-TE	120	270	130	290
26-xxxx-140-TE	125	280	140	310
26-xxxx-150-TE	135	300	150	330
26-xxxx-160-TE	145	320	160	350
26-xxxx-170-TE	155	340	170	370
26-xxxx-180-TE	160	340	180	380

- The 27-xxxx-xxx-TE may be substituted for this part series. All 26-xxxx-xxx-TE end product specifications will remain as published; there is no change to part numbers, product testing, quality or reliability. Traceability is accomplished through product serial number.
- The maximum operating power P<sub>op</sub> will be achieved at a device-specific current, the maximum operating current I<sub>op</sub>. The individual value of I<sub>op</sub> is noted on the hardcopy data sheet shipped with the device. All values of I<sub>op</sub> are limited by the maximum value listed in Table 2.
- The pump laser shall never be operated at a power higher than the maximum operating power P<sub>op</sub> throughout its lifetime. At Begin of Life (BOL), the operating current shall never be higher than the device-specific maximum operating current I<sub>op</sub> that is noted on the hardcopy data sheet shipped with the device. At End of Life (EOL), the operating current shall never be higher than the device-specific kink-free current I<sub>max</sub> that is noted on the hardcopy data sheet shipped with the device.
- The module is kink-free (at least) up to a minimum kink-free power P<sub>max</sub> that the module will achieve at a device-specific current, the kink-free current I<sub>max</sub>. The individual value of I<sub>max</sub> is noted on the hardcopy data sheet shipped with the device. All values of I<sub>max</sub> are limited by the maximum value listed in Table 2.

## 4

**Table 3: Available Peak Wavelength Selection** $(T_{amb} = 25 \pm 3 \text{ } ^\circ\text{C}, 50 \text{ mW} < P < P_{op})$ 

Product Code	Minimum Peak Wavelength	Maximum Peak Wavelength
26-8000-xxx-TE	970.0 nm	985.0 nm
26-7402-xxx-TE	973.0 nm	975.0 nm
26-7552-xxx-TE	974.5 nm	976.5 nm
26-7602-xxx-TE	975.0 nm	977.0 nm
26-7702-xxx-TE	976.0 nm	978.0 nm
26-8052-xxx-TE	979.5 nm	981.5 nm

**Table 4: Electro-Optical Performance** $(BOL, T_{case} = 0 \text{ to } 75 \text{ } ^\circ\text{C}, T_{LD} = 25 \text{ } ^\circ\text{C}, -50 \text{ dB reflection, unless noted otherwise})$ 

Parameter	Symbol	Test Condition	Minimum	Maximum
Threshold current	$I_{th}$	-	-	25 mA
Forward voltage	$V_f$	$I_f = I_{op}$	-	2.5 V
Spectral width	$\Delta\lambda_{RMS}$	$50 \text{ mW} < P < P_{op}$	-	2.0 nm
Peak wavelength tuning	$\Delta\lambda_P/\Delta T_{amb}$	$50 \text{ mW} < P < P_{op}$	-	0.02 nm/ $^\circ\text{C}$
Side-mode suppression ratio	SMSR	$50 \text{ mW} < P < P_{op}$	15 dB	-
Relative optical power stability		Peak-to-peak, $T = 10 \text{ min}$ , 50 kHz sampling, $T_{case} = 25 \text{ } ^\circ\text{C}$ $20 \text{ mW} < P < P_{op}$ $12 \text{ mW} < P < 20 \text{ mW}$ $3.5 \text{ mW} < P < 12 \text{ mW}$	- - -	4% 10% 25%
Tracking error	TE	$20 \text{ mW} < P < P_{op}^1$	-8%	8%
Tracking ratio	TR	$20 \text{ mW} < P < P_{op}^2$	0.90	1.10
Monitor diode responsivity	$Resp_{BF}$	$20 \text{ mW} < P < P_{op}$	2 $\mu\text{A/mW}$	10 $\mu\text{A/mW}$
TEC current	$I_{TEC}$	$T_{case} = 75 \text{ } ^\circ\text{C}$	-	1.5 A
TEC voltage	$V_{TEC}$	$T_{case} = 75 \text{ } ^\circ\text{C}$	-	2.5 V
Thermistor resistance	$R_{th}$	-	9.5 k $\Omega$	10.5 k $\Omega$
Thermistor constant	B	-	3600 K	4200 K
Module power consumption		$T_{case} = 75 \text{ } ^\circ\text{C}$ $T_{case} = 75 \text{ } ^\circ\text{C}, \text{EOL}$	- -	4.5 W 5.0 W

1. The Tracking Error is defined as the normalized change of output power relative to the operating power over case temperature range  $0 \text{ } ^\circ\text{C}$  to  $75 \text{ } ^\circ\text{C}$ , at constant back face monitor current corresponding to the operating power at  $25 \text{ } ^\circ\text{C}$ .
2. The Tracking Ratio is a measure of the front-to-back tracking when the output power is varied. On a plot of optical power versus back-face photocurrent, a straight line is drawn between the minimum power (20 mW) and the operating power  $P_{op}$  points. The tracking ratio is defined as the ratio between measured optical power (shown as data points on the plot) to the value derived from the straight line.

## 5

## Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

## Sample: 26-7402-100-TE

26-		-		-TE	
Code	Peak Wavelength	Code	Minimum Kink-Free Power		
7402	973.0 to 975.0 nm	100	100 mW		
7552	974.5 to 976.5 nm	110	110 mW		
7602	975.0 to 977.0 nm	120	120 mW		
7702	976.0 to 978.0 nm	130	130 mW		
8000	970.0 to 985.0 nm	140	140 mW		
8052	979.5 to 981.5 nm	150	150 mW		
		160	160 mW		
		170	170 mW		
		180	180 mW		

## User Safety

## Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT INCREASES EYE HAZARD.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with this component cannot exceed maximum peak optical power.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current. Careful attention to heatsinking and proper mounting of this device is required to ensure specified performance over its operating life. To maximize thermal transfer to the heatsink, the heatsink mounting surface must be flat to within .001" and the mounting screws must be torqued down to 1.5 in.-lb.

ESD PROTECTION — Electrostatic discharge (ESD) is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous antistatic techniques when handling laser diodes.

**Labeling**
**21 CFR 1040.10 Compliance**

Because of the small size of these devices, the output power and laser emission indicator label shown below is attached to the individual shipping container. All labels are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiations Control for Health and Safety Act of 1968.

**14-Pin Module Label**

**Shipping Box Label**

**Output Power and Laser Emission Indicator Label**
