


Bulk Metal® Foil Technology Low Profile Conformally Coated High Precision Resistor with Tight Tolerance from $\pm 0.01\%$ and Load Life Stability of $\pm 0.01\%$ and Instantaneous Thermal Stabilization

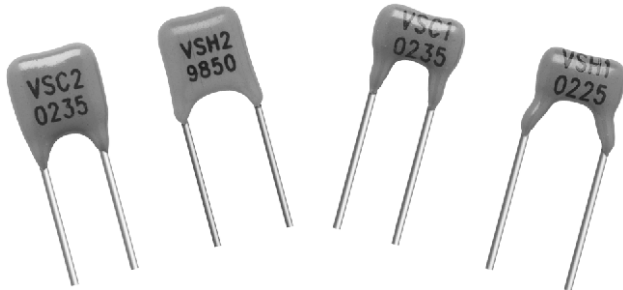

Vishay Foil Resistors are manufactured with any resistance value within given resistance range (e.g. 1 k Ω or 1.1234 k Ω)

INTRODUCTION

Bulk Metal® Foil (BMF) technology out-performs all other resistor technologies available today for applications that require high precision and high stability, and allows production of customer oriented products designed to satisfy challenging and specific technical requirements.

The BMF provides an inherently low and predictable Temperature Coefficient of Resistance (TCR) and excellent load life stability for high precision analog applications.

Model VSH offers low TCR, excellent load life stability, tight tolerance, excellent shelf life stability, low current noise and low voltage coefficient, all in the same resistor.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us using the e-mail address in the footer below.

FEATURES


- Temperature coefficient of resistance (TCR): ± 2.0 ppm/ $^{\circ}\text{C}$ typical (- 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$, + 25 $^{\circ}\text{C}$ ref.) (see table 1)
- Tolerance: to $\pm 0.01\%$
- Power rating: to 300 mW at + 70 $^{\circ}\text{C}$
- Load life stability: to $\pm 0.01\%$ at 70 $^{\circ}\text{C}$, 2000 h at rated power
- Resistance range: 5 Ω to 120 k Ω (for higher and lower values, please contact us)
- Instantaneous thermal stabilization
- **Electrostatic discharge (ESD) above 25 000 V**
- Short time overload: $\leq 0.01\%$
- Maximum working voltage: 300 V
- Non inductive, non capacitive design
- Rise time: 1 ns without ringing
- Current noise: < - 42 dB
- Voltage coefficient < 0.1 ppm/V
- Non inductive: < 0.08 μH
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Matched sets are available per request
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 72 h. For more information, please contact foil@vishay.com
- For better performances please review **Z201** and **S102C** Series datasheets



RoHS
COMPLIANT

APPLICATIONS

- Automatic test equipment (ATE)
- High precision instrumentation
- Laboratory, industrial and medical
- Audio
- EB applications (electron beam scanning and recording equipment, electron microscopes)
- Commercial aviation
- Airborne
- Down hole instrumentation
- Communication

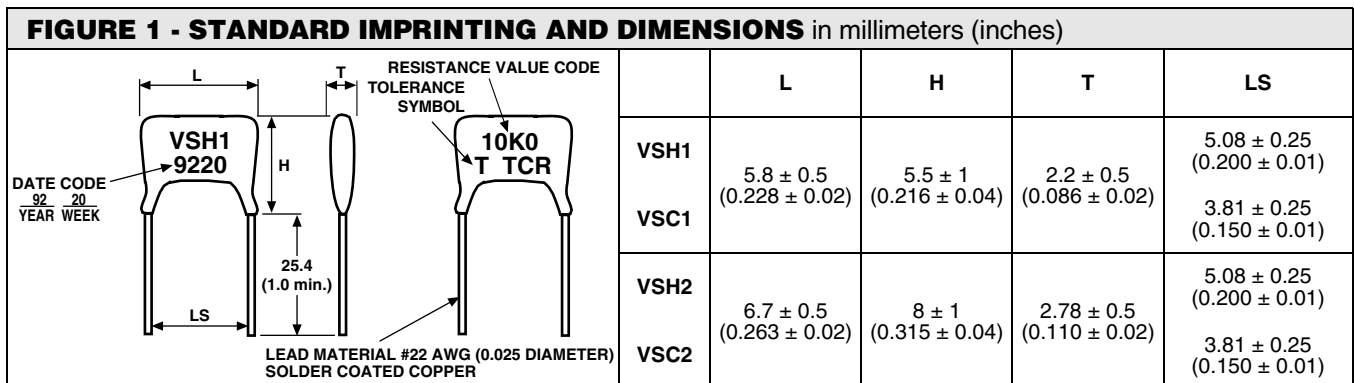

Note

1. Letters H and C indicate a difference in lead spacing and -2 is an extension range

Vishay Foil Resistors Bulk Metal® Foil Technology Low Profile Conformally Coated High Precision Resistor with Tight Tolerance from $\pm 0.01\%$ and Load Life Stability of $\pm 0.01\%$ and Instantaneous Thermal Stabilization

TABLE 1 - TOLERANCE AND TCR VS. RESISTANCE VALUE (- 55 °C to + 125 °C, + 25 °C Ref.)

RESISTOR	RESISTANCE VALUE (Ω)	TYPICAL TCR AND MAX. SPREAD (ppm/°C)	TOLERANCE (%)
VSH2 VSC2	60K to 120K	$\pm 2 \pm 4.5$	$\pm 0.01\%$
VSH1 VSC1	80 to < 60K	$\pm 2 \pm 4.5$	$\pm 0.01\%$
VSH1 VSC1	50 to < 80	$\pm 2 \pm 5.5$	$\pm 0.02\%$
VSH1 VSC1	5 to < 50	$\pm 2 \pm 6.5$	$\pm 0.05\%$

TABLE 2 - PERFORMANCE SPECIFICATIONS

TEST	CONDITIONS	ΔR (%) - TYPICAL	ΔR (%) - MAXIMUM
Moisture Resistance	MIL-STD-202, method 106	± 0.005	± 0.03
Pressure Cooker Test	2 atmospheres absolute pressure, 121 °C, 100 % R.H. for 100 h	± 0.2	± 0.4
Short Time Overload	$6.25 \times P_{nom}$, 5 s	± 0.005	± 0.05
Resistance to Solder Heat	+ 260 °C, 20 s	± 0.01	± 0.03
Terminal Strength	2 lbs, 10 s	± 0.0025	± 0.03
Insulation Resistance	DC 100 V, 2 min	> 10 000M	> 10 000M
Dielectric Withstanding Voltage	AC 300 V, 1 min	± 0.0025	± 0.03
Thermal Shock	- 65 °C to + 150 °C, 5 cycles	± 0.01	± 0.02
Shock	MIL-STD-202, method 213, condition I	± 0.005	± 0.03
Vibration	MIL-STD-202, method 204, condition D	± 0.01	± 0.03
Load Life Stability	0.3 W, + 70 °C, 2000 h	± 0.01	± 0.015
Thermal EMF	-	0.07 $\mu V/^\circ C$	0.1 $\mu V/^\circ C$
Current Noise	Quan-Tech	- 42 dB	- 32 dB
Low Temperature Storage	24 h at - 65 °C	± 0.005	± 0.01
Low Temperature Operation	45 min at - 65 °C	± 0.005	± 0.01
High Temperature Exposure	+ 150 °C	± 0.01	± 0.03

FIGURE 2 - TRIMMING TO VALUES
(Conceptual Illustration)


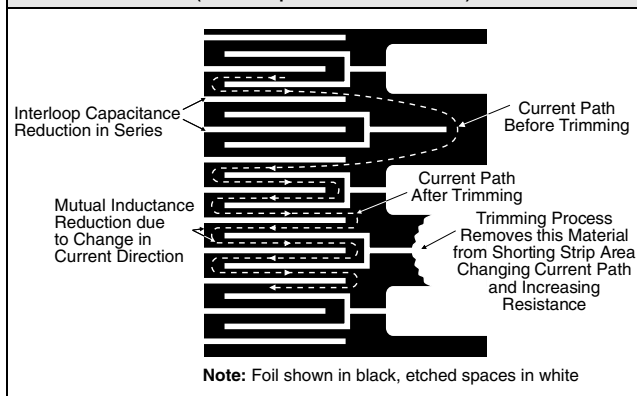


FIGURE 3 - POWER DERATING CURVE




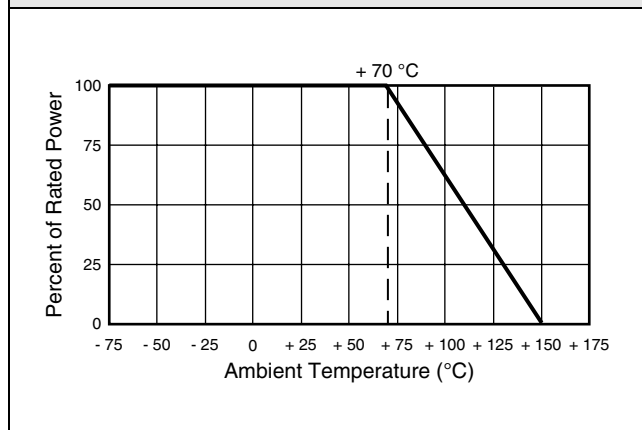

Bulk Metal® Foil Technology Low Profile Conformally Coated High Vishay Foil Resistors
 Precision Resistor with Tight Tolerance from $\pm 0.01\%$ and Load
 Life Stability of $\pm 0.01\%$ and Instantaneous Thermal Stabilization

TABLE 3 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y090212K7560T9R (preferred part number format)

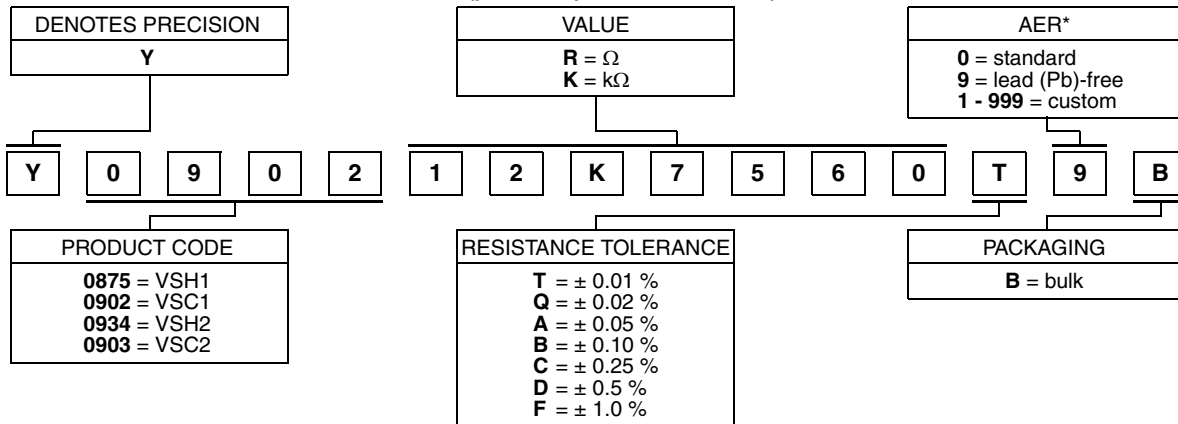

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0902 12K7560 T 9 B:

TYPE: VSC1
 VALUES: 12.7560 $k\Omega$
 ABSOLUTE TOLERANCE: 0.01 %
 TERMINATION: lead (Pb)-free
 PACKAGING: bulk

HISTORICAL PART NUMBER: VSC1 12K756 TCR2 T S B (will continue to be used)

VSC1	12K756	TCR2	T	S	B
MODEL	RESISTANCE VALUE	TCR CHARACTERISTICS	TOLERANCE	TERMINATION	PACKAGING
VSH1 VSC1 VSH2 VSC2	12.756 $k\Omega$		T = $\pm 0.01\%$ Q = $\pm 0.02\%$ A = $\pm 0.05\%$ B = $\pm 0.10\%$ C = $\pm 0.25\%$ D = $\pm 0.5\%$ F = $\pm 1.0\%$	S = lead (Pb)-free B = tin/lead	B = bulk

Note

* For non-standard requests, please contact application engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.