


1. Mechanical Dimensions:

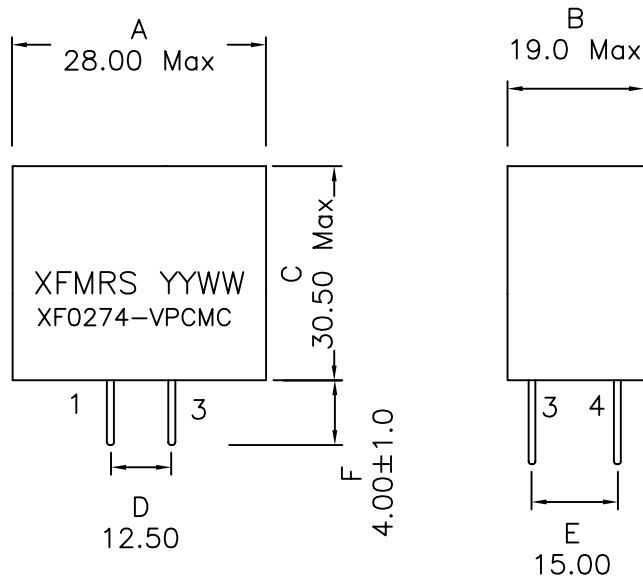


Lead Dia.: 0.70

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

2. Schematic:

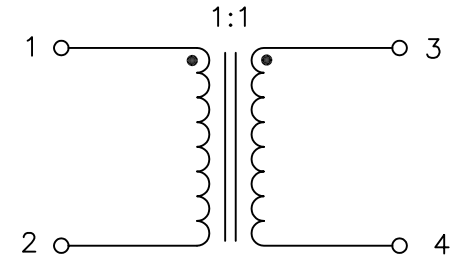

3. Electrical Specifications:

Inductance: 2.7mH±30% @1KHz 0.1V, Each Wdg
 DCR: 0.026±30% Ohms, Each Wdg
 Rated RMS Current: 4.0 Amps Max
 Rated Current: 250VAC
 Isolation Voltage: 1500VAC

DOC REV: B/2

XFMR5 Inc.	Title: COMMON MODE EMI SUPPRESSION INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0274-VPCMC	REV. B
SHEET 1 OF 1	DWN.	Kang Chen	Mar-11-04
	CHK.	YK Liao	Mar-11-04
	APP.	MS	Mar-11-04

PROPRIETARY

Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.