

Single N-channel MOSFET

ELM17404FA-S

General description

ELM17404FA-S uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and operation with gate voltages as low as 1.8V and internal ESD protection is included.

Features

- $V_{ds}=20V$
- $I_d=1A$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 225m\Omega$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 290m\Omega$ ($V_{gs}=2.5V$)
- $R_{ds(on)} < 425m\Omega$ ($V_{gs}=1.8V$)
- ESD Rating : 1000V HBM

Maximum absolute ratings


Parameter	Symbol	Limit	Unit	Note	
Drain-source voltage	V_{ds}	20	V		
Gate-source voltage	V_{gs}	± 8	V		
Continuous drain current	I_d	$T_a=25^\circ C$	1.00	A	1
		$T_a=70^\circ C$	0.75		
Pulsed drain current	I_{dm}	5	A	2	
Power dissipation	P_d	$T_a=25^\circ C$	0.35	W	1
		$T_a=70^\circ C$	0.22		
Junction and storage temperature range	T_j, T_{stg}	-55 to 150	$^\circ C$		

Thermal characteristics

Parameter		Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$t \leq 10s$	$R\theta_{ja}$	300	360	$^\circ C/W$	1
Maximum junction-to-ambient	Steady-state		340	425	$^\circ C/W$	
Maximum junction-to-lead	Steady-state	$R\theta_{jl}$	280	320	$^\circ C/W$	3


Pin configuration

SC-70 (TOP VIEW)



Pin No.	Pin name
1	GATE
2	SOURCE
3	DRAIN

Circuit



Single N-channel MOSFET

ELM17404FA-S

Electrical characteristics

T_a=25°C

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	BV _{dss}	I _d =250 μA, V _{gs} =0V	20			V
Zero gate voltage drain current	I _{dss}	V _{ds} =16V			1	μA
		V _{gs} =0V		T _j =55°C	5	
Gate-body leakage current	I _{gss}	V _{ds} =0V, V _{gs} =±8V			25	μA
Gate threshold voltage	V _{gs(th)}	V _{ds} =V _{gs} , I _d =250 μA	0.40	0.55	0.80	V
On state drain current	I _{d(on)}	V _{gs} =4.5V, V _{ds} =5V	5			A
Static drain-source on-resistance	R _{ds(on)}	V _{gs} =4.5V		186	225	mΩ
		I _d =1A	T _j =125°C	262	315	
		V _{gs} =2.5V, I _d =0.85A		241	290	
		V _{gs} =1.8V, I _d =0.7A		326	425	mΩ
Forward transconductance	G _{fs}	V _{ds} =5V, I _d =1A		2.6		S
Diode forward voltage	V _{sd}	I _s =1A, V _{gs} =0V		0.69	1.00	V
Max. body-diode continuous current	I _s				0.4	A
DYNAMIC PARAMETERS						
Input capacitance	C _{iss}			101		pF
Output capacitance	C _{oss}	V _{gs} =0V, V _{ds} =10V, f=1MHz		17		pF
Reverse transfer capacitance	C _{rss}			14		pF
Gate resistance	R _g	V _{gs} =0V, V _{ds} =0V, f=1MHz		3		Ω
SWITCHING PARAMETERS						
Total gate charge	Q _g			1.57		nC
Gate-source charge	Q _{gs}	V _{gs} =4.5V, V _{ds} =10V, I _d =1A		0.13		nC
Gate-drain charge	Q _{gd}			0.36		nC
Turn-on delay time	t _{d(on)}			3.2		ns
Turn-on rise time	t _r	V _{gs} =5V, V _{ds} =10V		4.0		ns
Turn-off delay time	t _{d(off)}	R _l =10 Ω, R _{gen} =6 Ω		15.5		ns
Turn-off fall time	t _f			2.4		ns
Body diode reverse recovery time	t _{rr}	I _f =1A, dI/dt=100A/μs		6.7		ns
Body diode reverse recovery charge	Q _{rr}	I _f =1A, dI/dt=100A/μs		1.6		nC

NOTE :

1. The value of R_{θja} is measured with the device mounted on 1in² FR-4 board of 2oz. Copper, in still air environment with T_a=25°C. The value in any given applications depends on the user's specific board design, The current rating is based on the t ≤ 10s thermal resistance rating.
2. Repetitive rating, pulse width limited by junction temperature.
3. The R_{θja} is the sum of the thermal impedance from junction to lead R_{θjl} and lead to ambient.
4. The static characteristics in Figures 1 to 6 are obtained using 80 μs pulses, duty cycle 0.5%max.
5. These tests are performed with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_a=25°C. The SOA curve provides a single pulse rating.

Single N-channel MOSFET

ELM17404FA-S

Typical electrical and thermal characteristics

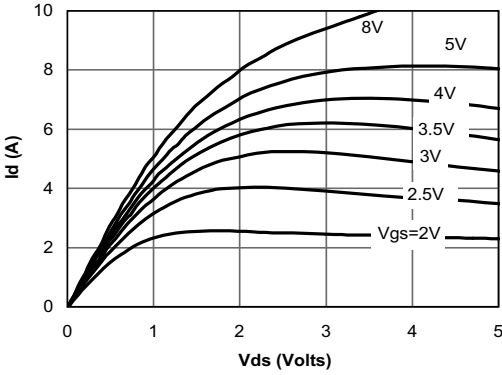


Fig 1: On-Region Characteristics

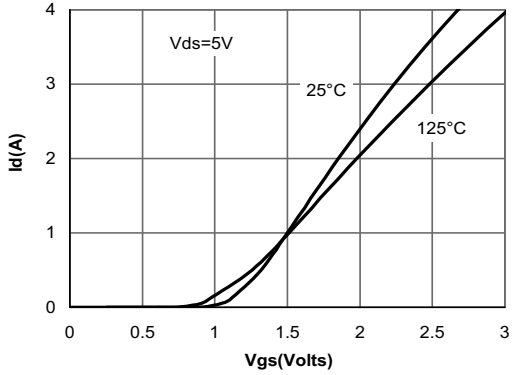


Figure 2: Transfer Characteristics

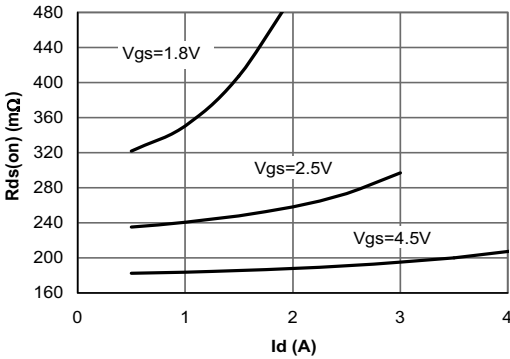


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

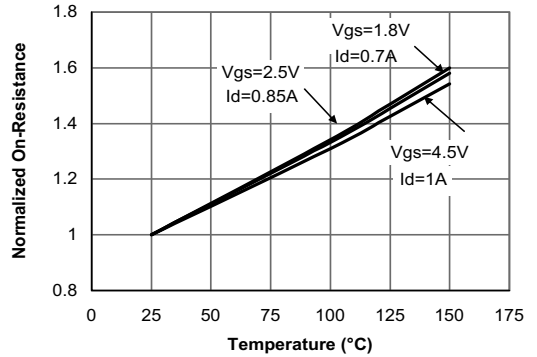


Figure 4: On-Resistance vs. Junction Temperature

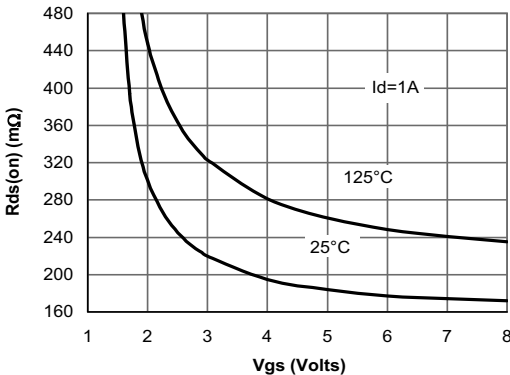


Figure 5: On-Resistance vs. Gate-Source Voltage

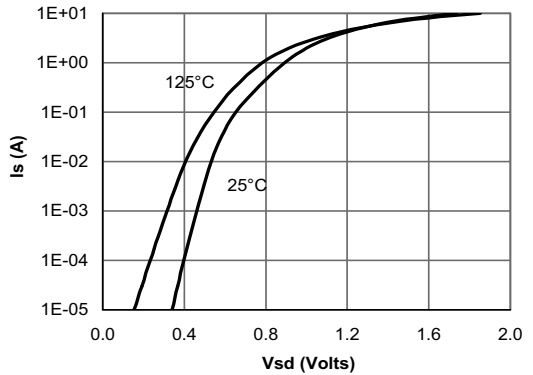


Figure 6: Body-Diode Characteristics

Single N-channel MOSFET

ELM17404FA-S

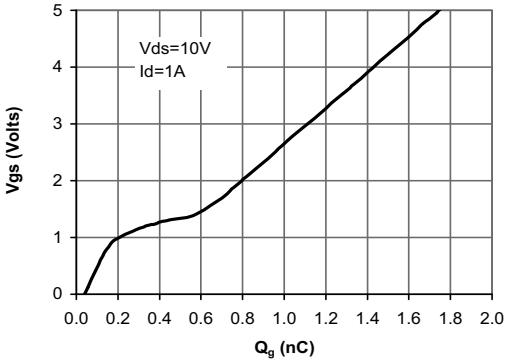


Figure 7: Gate-Charge Characteristics

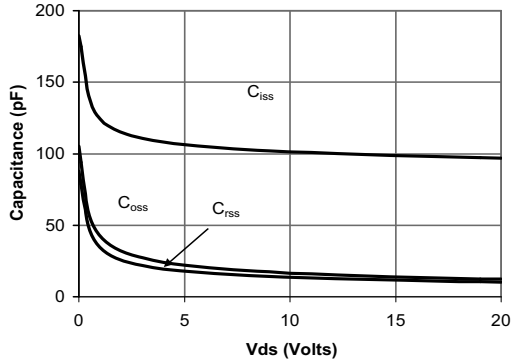


Figure 8: Capacitance Characteristics

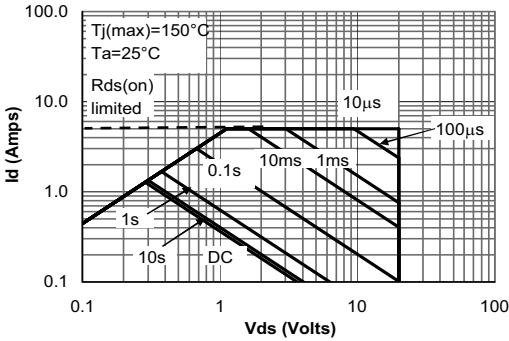


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

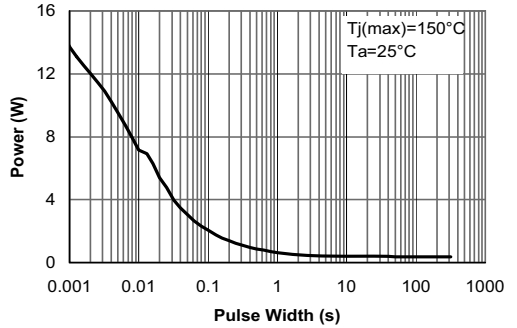


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

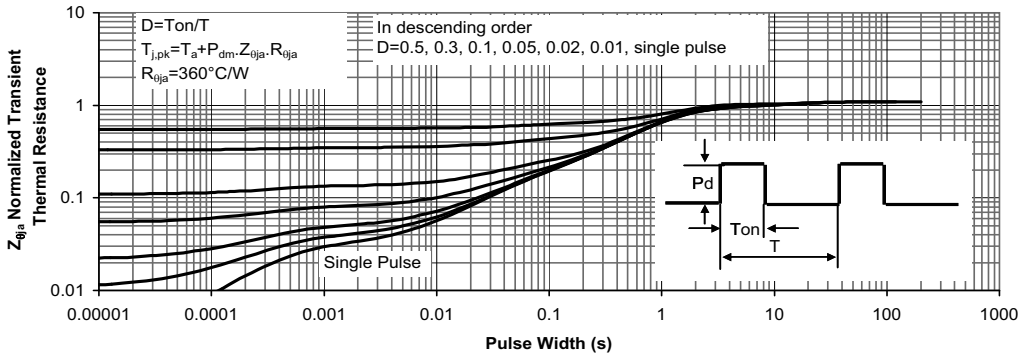


Figure 11: Normalized Maximum Transient Thermal Impedance