

GETG0105

PHASE CONTROLLED SCR

Plastic case

DC power supply

AC drives

VOLTAGE UP TO	600 V
AVERAGE CURRENT	1050 A
SURGE CURRENT	15 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
VRRM	Repetitive peak reverse voltage	600 V
VRSM	Non-repetitive peak reverse voltage	700 V
VDRM	Repetitive peak off-state voltage	600 V
IDRM	Repetitive peak off-state current, max.	VDRM, single phase, half wave, Tj = Tjmax
IRRM	Repetitive peak reverse current, max.	VRRM, single phase, half wave, Tj = Tjmax

ON-STATE CHARACTERISTICS

IT(AV)	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	1050 A
IT(RMS)	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	1649 A
ITSM	Surge on-state current	Non rep. half sine wave, 50 Hz, VR = 0 V, Tj = Tjmax	15 kA
I²t	I² t for fusing coordination		1125 kA²s
VT(TO)	Threshold voltage	Tj = Tjmax	0,87 V
rT	On-state slope resistance	Tj = Tjmax	0,238 mΩ
VTM	Peak on-state voltage, max	On-state current It = 2900 A , Tj = Tjmax	1,56 V
IH	Holding current, max	Tj = 25 °C	600 mA
IL	Latching current, typ	Tj = 25 °C	1000 mA

TRIGGERING CHARACTERISTICS

VGT	Gate trigger voltage	Tj = 25 °C, VD = 5 V	2,5 V
IGT	Gate trigger current	Tj = 25 °C, VD = 5 V	190 mA
VGD	Non-trigger voltage	VD = 67% VRRM, Tj = Tjmax	0,25 V
PGM	Peak gate power dissipation	Pulse width 0.5 ms	10 W
PG(AV)	Average gate power dissipation		2 W
IFGM	Peak gate current		3 A
VFGM	Peak gate voltage (forward)		20 V
VRGM	Peak gate voltage (reverse)		5 V


SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	Tj = Tjmax - non repetitive	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	Tj = Tjmax	500 V/μs
tq	Turn-off time, typ	Tj = Tjmax, It = 320 A, di/dt = -12.5 A/μs	μs
		VR = 100 V, VD = 67% VDRM, dV/dt = 20 V/μs	


THERMAL AND MECHANICAL CHARACTERISTICS

Rth(j-c)	Thermal resistance (junction to case)	Double side cooled	0,034 °C/W
Rth(c-h)	Thermal resistance (case to heatsink)	Double side cooled	0,010 °C/W
Tjmax	Max operating junction temperature		125 °C
Tstg	Storage temperature		-30 / 125 °C
F	Clamping force ± 10%		9,0 kN
	Mass		75 g


Current rating - sine wave

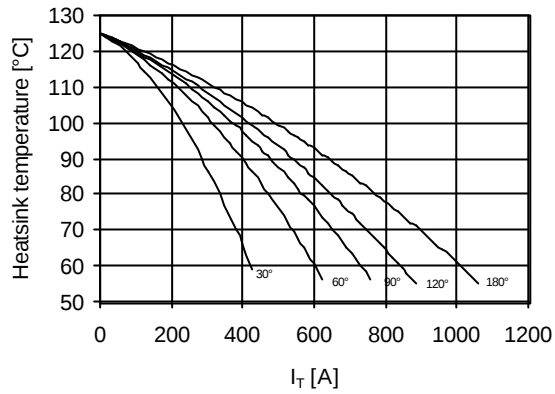


Power loss - sine wave

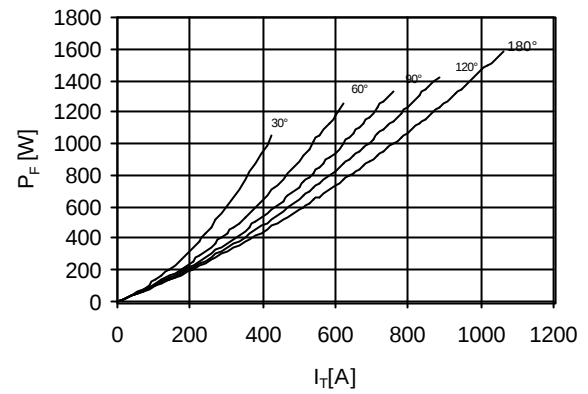



Maximum surge current
d.s. cooled

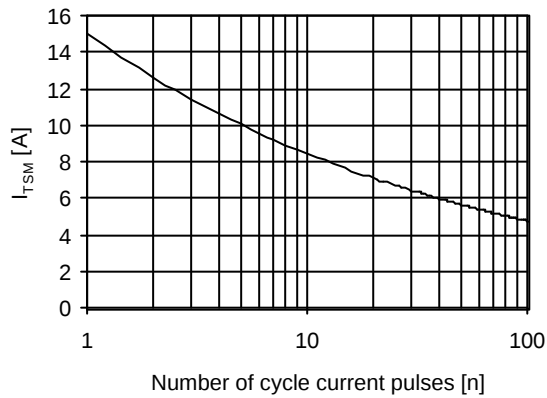

On-state voltage drop

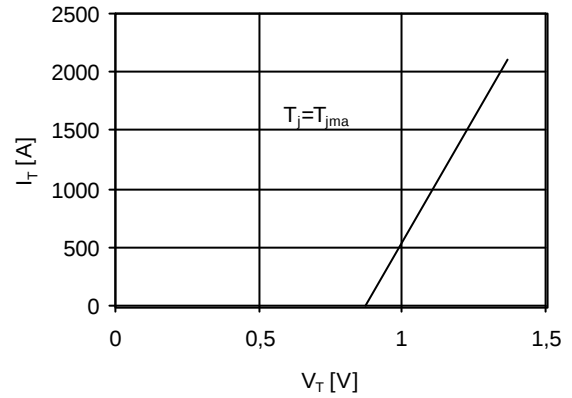

Thermal impedance (j-c)

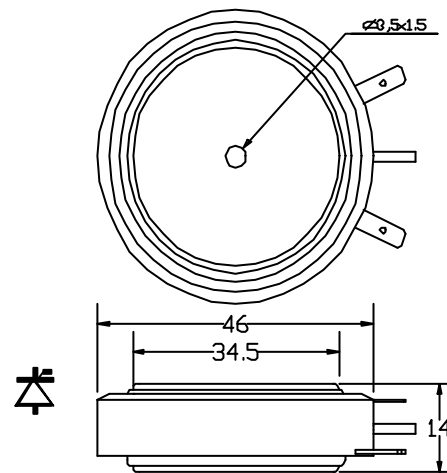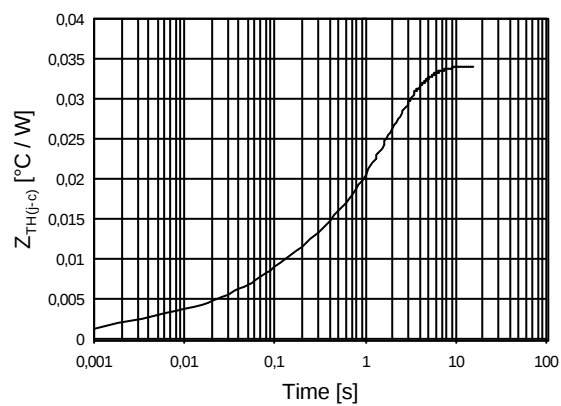

dimensions mm

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.