


## TERMINAL BLOCKS

- 5mm Pitch
- 2 and 3 pole interlocking
- 4-12 pole solid, end stackable
- Screw terminal
- UL94v-0 Flame retardant material
- 2.5mm<sup>2</sup> wire acceptance
- UL/VDE approved

## 5mm PITCH VERTICAL MOUNT

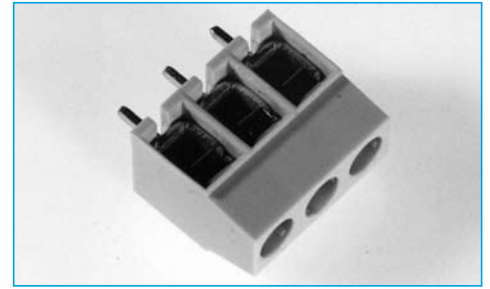


## SPECIFICATION

**Rating:** 17.5A/380V  
**Dielectric Strength:** >2.5KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant Lexan

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Wire protect:** Tin plated phosphor bronze  
**Screw/torque:** M3 steel/0.5Nm 7 micron zinc colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.1mm

## OUTLINE DRAWING

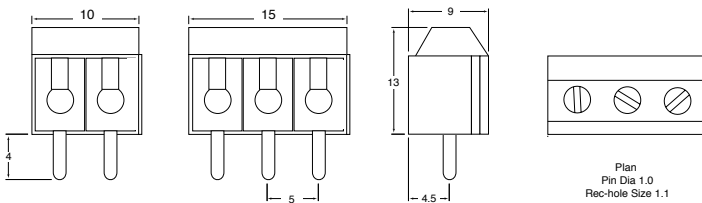


## ORDERING INFORMATION

DBC	TB	2	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
			2 = 2 ways 3 = 3 ways
			* Other Number of ways are available up to 12 Please consult office for further details

## TERMINAL BLOCKS

- Low profile
- 2-12 Pole interlocking
- UL94V-0 Flame retardant material
- Test probe facility
- 1.5mm<sup>2</sup> wire acceptance
- Screw terminal
- UL/VDE/CE approved

## 5mm PITCH VERTICAL MOUNT - LOW PROFILE

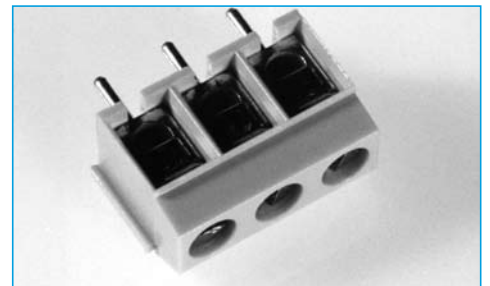


## SPECIFICATION

**Rating:** 16A/250V  
**Dielectric Strength:** >2KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant Lexan

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Wire protect:** Tin plated phosphor bronze  
**Screw/torque:** M2.5 steel/0.4Nm 7 micron zinc colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.1mm

## OUTLINE DRAWING

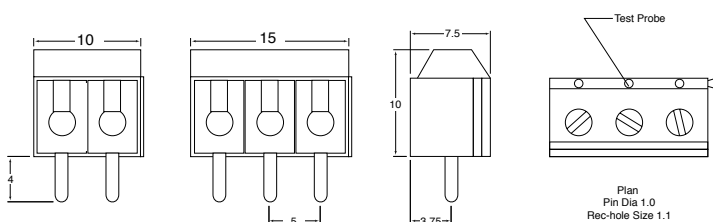

## ORDERING INFORMATION

DBC	TB	3	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
		3=Grey 3A=Black	2 = 2 ways 3 = 3 ways
			* Other Number of ways are available up to 12 Please consult office for further details