



TERMINAL BLOCKS

- 3.5mm pitch
- Ultra low profile
- Flame retardant material
- 1mm² wire acceptance
- UL/CSA approved
- Interlocking
- Screw terminal

3.5mm PITCH 90° MOUNT




SPECIFICATION

Rating: 10A/125V
Dielectric Strength: 1.5KV
Insulation Resistance: 5MΩ/1000V
Working temperature: -33°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated copper flash brass
Screw/torque: M2 steel, 5μ zinc & colour passivated 0.4Nm max
Recommended PCB
Hole Size: ø1.1mm

OUTLINE DRAWING

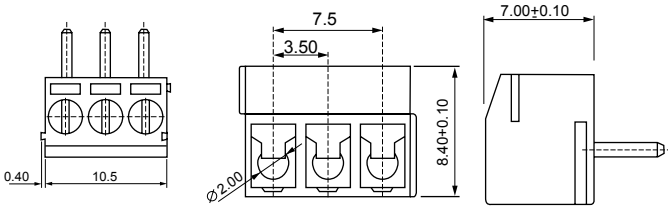

ORDERING INFORMATION

DBC	TB	81	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
 Please consult office for further details

TERMINAL BLOCKS



- 3.5mm pitch
- Ultra low profile
- Flame retardant material
- 0.75mm² wire acceptance
- UL/CSA approved
- Interlocking
- Professional rising clamp

3.5mm PITCH 90° MOUNT




SPECIFICATION

Rating: 9A/130V
Dielectric Strength: 1.5KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated brass
Rising clamp: Nickel plated brass
Screw/torque: M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm
Recommended PCB
Hole Size: ø1.1mm

OUTLINE DRAWING



ORDERING INFORMATION

DBC	TB	82	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways