

**IVGC4251**


Page 1 of 2



This lamp is a T-1 3/4, 5 mm Round.



RoHS Compliant  
Aug 2004

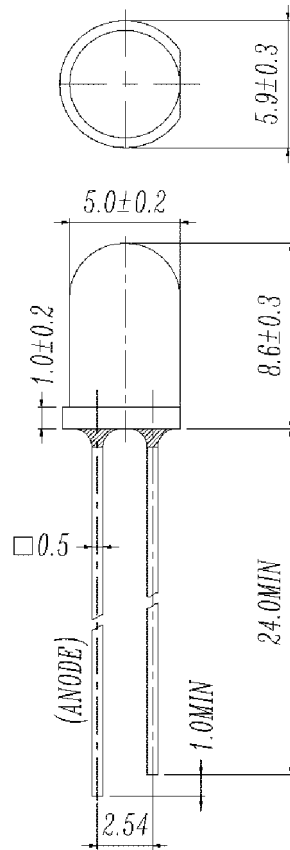

PART NO.	Chip		Lens Color
	Material	Emitted Color	
IVGC4251	GaP	Green	Water Clear

\* Specifications subject to change without notice. Dimensions are in mm  $\pm 0.25$  unless stated otherwise.

**Absolute Maximum Ratings at  $T_a = 25\text{ }^\circ\text{C}$** 

Parameter	Symbol	Rating	Units
Forward Current	$I_F$	30	mA
Operating Temperature	$T_{opr}$	-40 to +85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to +100	$^\circ\text{C}$
Soldering Temperature (soldering time $\leq 5$ seconds)	$T_{sol}$	$260 \pm 5$	$^\circ\text{C}$
Power Dissipation	$P_d$	100	mW
Peak Forward Current (Pulse Width $\leq 1$ msec and Duty $\leq 1/10$ )	$I_F$ (Peak)	160	mA
Reverse Voltage	$V_R$	5	V

**Electro-Optical Characteristics ( $T_a = 25\text{ }^\circ\text{C}$ )**

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Luminous Intensity	$I_V$	100	200	—	mcd	$I_F = 20\text{ mA}$
Viewing Angle	$2\theta_{1/2}$	—	20	—	deg	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_p$	—	570	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	$\lambda_d$	—	571	—	nm	$I_F = 20\text{ mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	—	30	—	nm	$I_F = 20\text{ mA}$
Forward Voltage	$V_F$	1.7	2.1	2.4	V	$I_F = 20\text{ mA}$
Reverse Current	$I_R$	—		10	$\mu\text{A}$	$V_R = 5\text{ V}$

\* Specifications subject to change without notice. Dimensions are in mm  $\pm 0.25$  unless stated otherwise.