


1. Mechanical Dimensions:

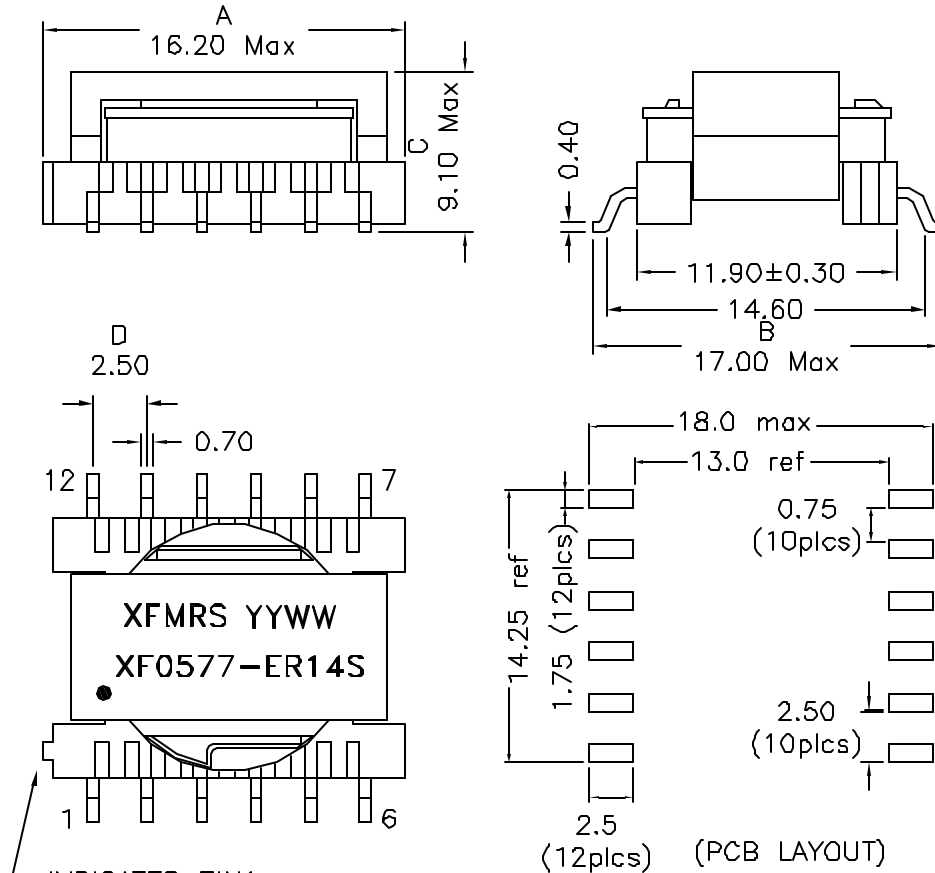


Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV A/1

2. Schematic:

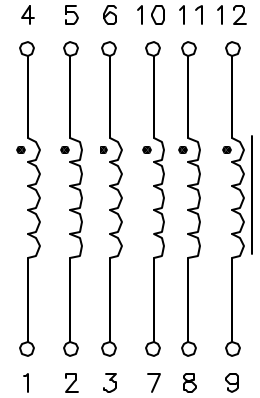

3. Electrical Specifications:

OCL: 5.7uH ±20% @10KHz 0.1V EACH WINDING
 LL P4-1: 0.083uH Typ @100KHz 0.1V
 All Else Shorted
 ISAT: 1.41 Amps Typ
 IRMS: 1.26 Amps Typ
 Volt-uS: 33.7uVs Max
 Energy: 3.94uJ Typ
 Thermal Resistance: 44.0 °C/Watt Typ
 DC Res: 0.090 Ohms Max. Each Windings
 HIPOT: 500VAC Wire to Wire & Wires to Core

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc		Title: Surface Mount Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in mm	P/N: XF0577-ER14S	REV. A	
	DWN.	李小锋	May-26-04
	CHK.	廖玉坤	May-26-04
SHT 1 OF 2	APP.	BW	May-26-04