



### 1. Dimensions:

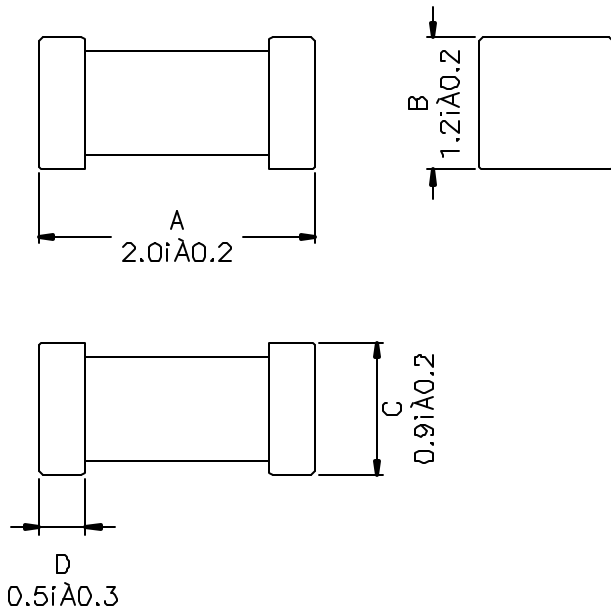

### 2. Schematic:



### 3. Electrical Specs:

OCL:  $1.0 \pm 10\%$   $\mu$ H @10MHz 1 OV

Q: 40 Min @10MHz

SRF: 75MHz Min

DC Res.: 0.4 Max Ohms

DC Current: 50mA Max

**Note:**

- 1 Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0.
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV: A/1

<b>XFMRs Inc</b>	Title: MULTILAYER FERRITE CHIP INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM	P/N: XFEI201209-1R0K	REV A
	DWN.	李小锋	May-30-01
	CHK.	廖玉坤	May-30-01
Scale 2.5:1 SHT 1 OF 1	APP.	BW	May-30-01