
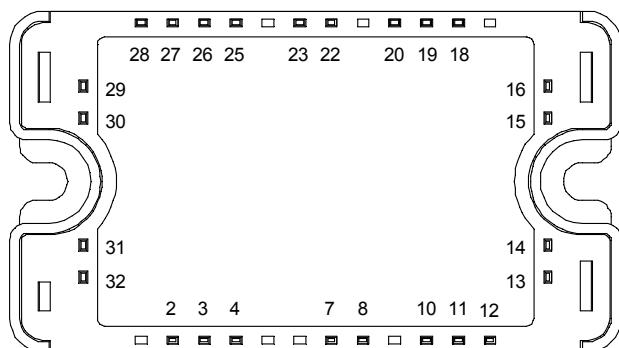


**Dual Buck chopper
Trench + Field Stop IGBT4
Power Module**

**V_{CES} = 1200V
I_C = 60A @ T_c = 80°C**

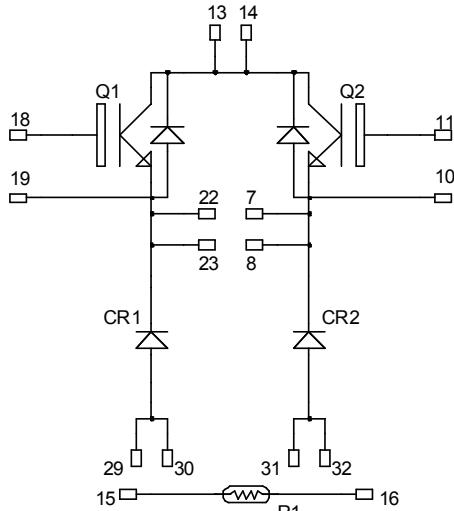

All multiple inputs and outputs must be shorted together
Example: 13/14 ; 29/30 ; 22/23 ...

Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V _{CES}	Collector - Emitter Breakdown Voltage	1200	V
I _C	Continuous Collector Current	T _C = 25°C 80	A
		T _C = 80°C 60	
I _{CM}	Pulsed Collector Current	T _C = 25°C 100	
V _{GE}	Gate – Emitter Voltage	±20	V
P _D	Maximum Power Dissipation	T _C = 25°C 280	W
RBSOA	Reverse Bias Safe Operating Area	T _j = 150°C 100A @ 1100V	

 **CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

Application

- AC and DC motor control
- Switched Mode Power Supplies

Features

- Trench + Field Stop IGBT 4 Technology
 - Low voltage drop
 - Low leakage current
 - Low switching losses
 - Soft recovery parallel diodes
 - Low diode VF
 - Low leakage current
 - RBSOA and SCSOA rated
 - Symmetrical design
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration
- Internal thermistor for temperature monitoring

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- Easy paralleling due to positive TC of VCEsat
- Each leg can be easily paralleled to achieve a single buck of twice the current capability
- RoHS compliant

All ratings @ $T_j = 25^\circ\text{C}$ unless otherwise specified

Electrical Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
I_{CES}	Zero Gate Voltage Collector Current	$V_{GE} = 0\text{V}$, $V_{CE} = 1200\text{V}$				250	μA
$V_{CE(\text{sat})}$	Collector Emitter saturation Voltage	$V_{GE} = 15\text{V}$	$T_j = 25^\circ\text{C}$		1.85	2.25	V
		$I_C = 50\text{A}$	$T_j = 150^\circ\text{C}$		2.25		
$V_{GE(\text{th})}$	Gate Threshold Voltage	$V_{GE} = V_{CE}$, $I_C = 1.6\text{mA}$		5.0	5.8	6.5	V
I_{GES}	Gate – Emitter Leakage Current	$V_{GE} = 20\text{V}$, $V_{CE} = 0\text{V}$				400	nA

Dynamic Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit		
C_{ies}	Input Capacitance	$V_{GE} = 0\text{V}$ $V_{CE} = 25\text{V}$ $f = 1\text{MHz}$			2770		pF		
C_{oes}	Output Capacitance				205				
C_{res}	Reverse Transfer Capacitance				160				
Q_G	Gate charge	$V_{GE} = \pm 15\text{V}$; $V_{CE} = 600\text{V}$ $I_C = 50\text{A}$			0.38		μC		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C) $V_{GE} = \pm 15\text{V}$ $V_{CE} = 600\text{V}$ $I_C = 50\text{A}$ $R_G = 8.2\Omega$			130		ns		
T_r	Rise Time				20				
$T_{d(off)}$	Turn-off Delay Time				300				
T_f	Fall Time				45				
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (150°C) $V_{GE} = \pm 15\text{V}$ $V_{CE} = 600\text{V}$ $I_C = 50\text{A}$ $R_G = 8.2\Omega$			150		ns		
T_r	Rise Time				35				
$T_{d(off)}$	Turn-off Delay Time				350				
T_f	Fall Time				80				
E_{on}	Turn-on Switching Energy	$V_{GE} = \pm 15\text{V}$ $V_{CE} = 600\text{V}$ $I_C = 50\text{A}$ $R_G = 8.2\Omega$		$T_j = 25^\circ\text{C}$	3.8		mJ		
E_{off}	Turn-off Switching Energy			$T_j = 150^\circ\text{C}$	5.5				
E_{on}	Turn-on Switching Energy			$T_j = 25^\circ\text{C}$	2.5		mJ		
E_{off}				$T_j = 150^\circ\text{C}$	4.5				
I_{sc}	Short Circuit data	$V_{GE} \leq 15\text{V}$; $V_{Bus} = 900\text{V}$ $t_p \leq 10\mu\text{s}$; $T_j = 150^\circ\text{C}$			200		A		

Chopper diode ratings and characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit		
V_{RRM}	Maximum Peak Repetitive Reverse Voltage			1200			V		
I_{RM}	Maximum Reverse Leakage Current	$V_R = 1200\text{V}$		$T_j = 25^\circ\text{C}$		100	μA		
				$T_j = 125^\circ\text{C}$		500			
I_F	DC Forward Current			$T_c = 80^\circ\text{C}$		60	A		
V_F	Diode Forward Voltage	$I_F = 60\text{A}$				2.5	3		
				$I_F = 120\text{A}$		3			
		$I_F = 60\text{A}$	$T_j = 125^\circ\text{C}$			1.8			
t_{rr}	Reverse Recovery Time	$I_F = 60\text{A}$ $V_R = 800\text{V}$ $di/dt = 200\text{A}/\mu\text{s}$		$T_j = 25^\circ\text{C}$		265	ns		
				$T_j = 125^\circ\text{C}$		350			
Q_{rr}	Reverse Recovery Charge			$T_j = 25^\circ\text{C}$		560	nC		
				$T_j = 125^\circ\text{C}$		2890			



Thermal and package characteristics

Symbol	Characteristic		Min	Typ	Max	Unit
R _{thJC}	Junction to Case Thermal Resistance	IGBT			0.53	°C/W
		Diode			0.9	
V _{ISOL}	RMS Isolation Voltage, any terminal to case t = 1 min, I isol < 1mA, 50/60Hz	2500				V
T _J	Operating junction temperature range	-40		175		
T _{STG}	Storage Temperature Range	-40		125		°C
T _C	Operating Case Temperature	-40		100		
Torque	Mounting torque	To heatsink	M4	2.5	4.7	N.m
Wt	Package Weight				110	g


Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	Characteristic		Min	Typ	Max	Unit
R ₂₅	Resistance @ 25°C			50		kΩ
ΔR _{25/R25}				5		%
B _{25/85}	T ₂₅ = 298.15 K			3952		K
ΔB/B		T _C =100°C		4		%

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature
R_T: Thermistor value at T








SP3 Package outline (dimensions in mm)


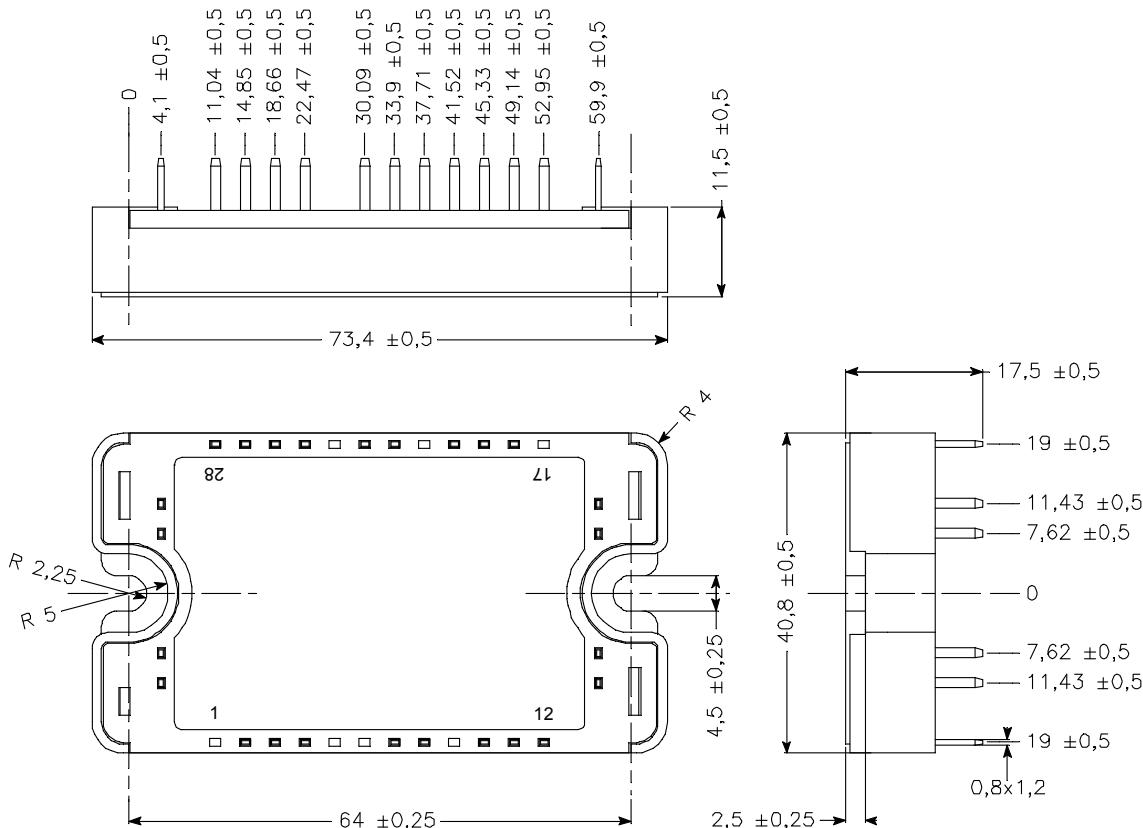


See application note 1901 - Mounting Instructions for SP3 Power Modules on www.microsemi.com




Typical Performance Curve

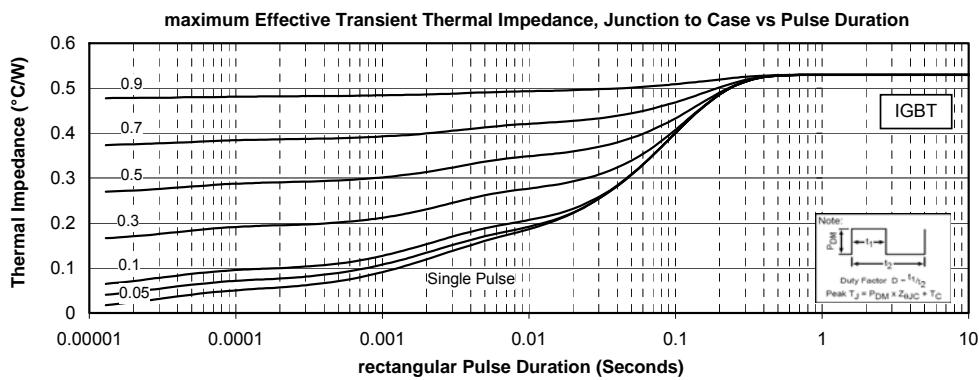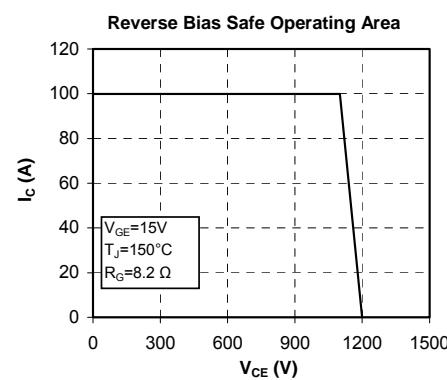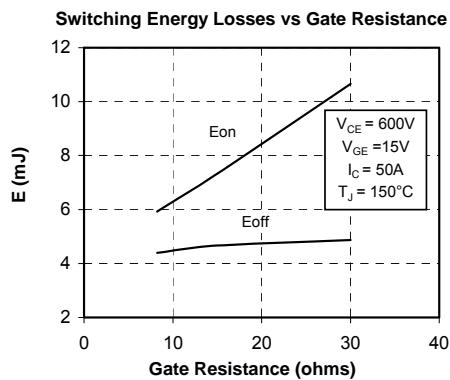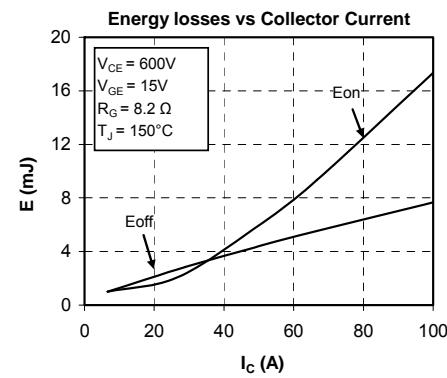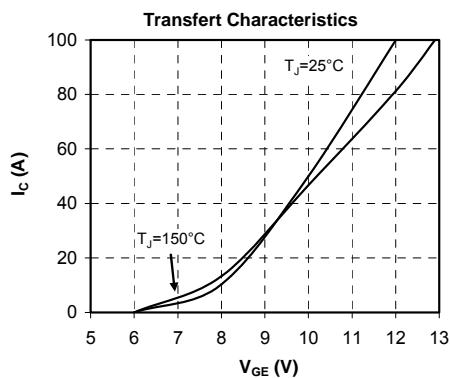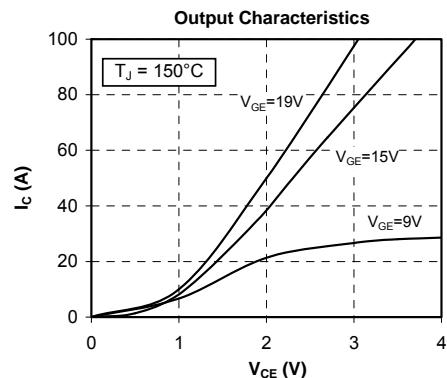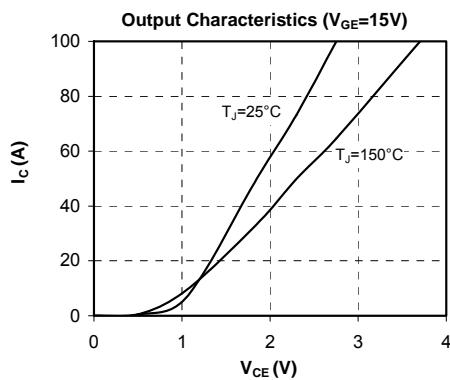

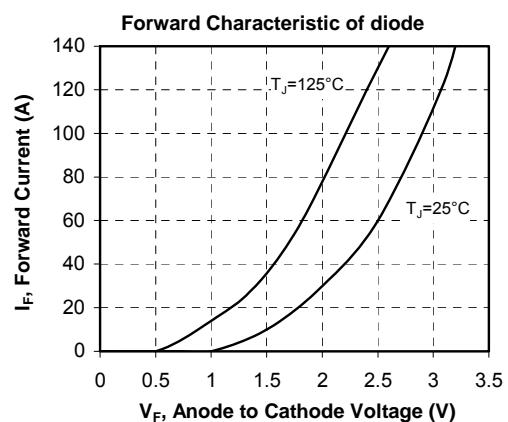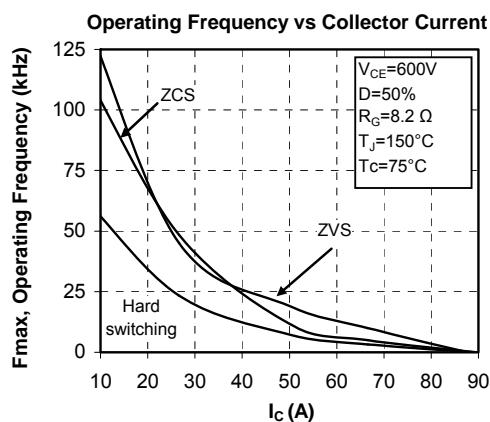

maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration

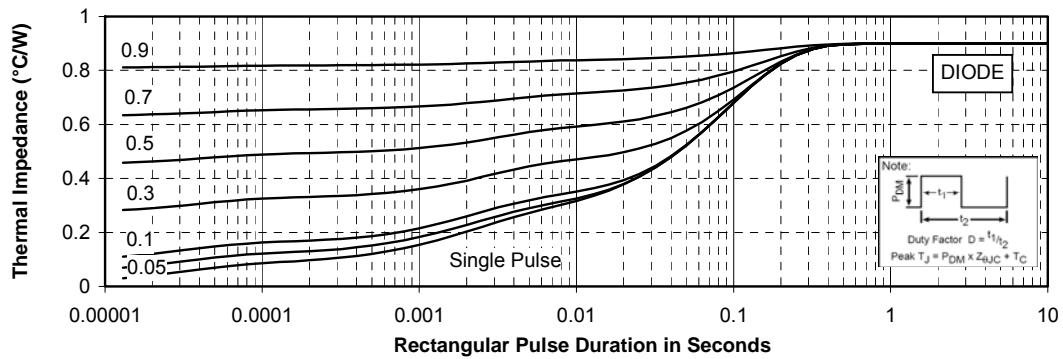

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 6,939,743 7,352,045 5,283,201 5,801,417 5,648,283 7,196,634 6,664,594 7,157,886 6,939,743 7,342,262 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.