



**1. Mechanical Dimensions:**

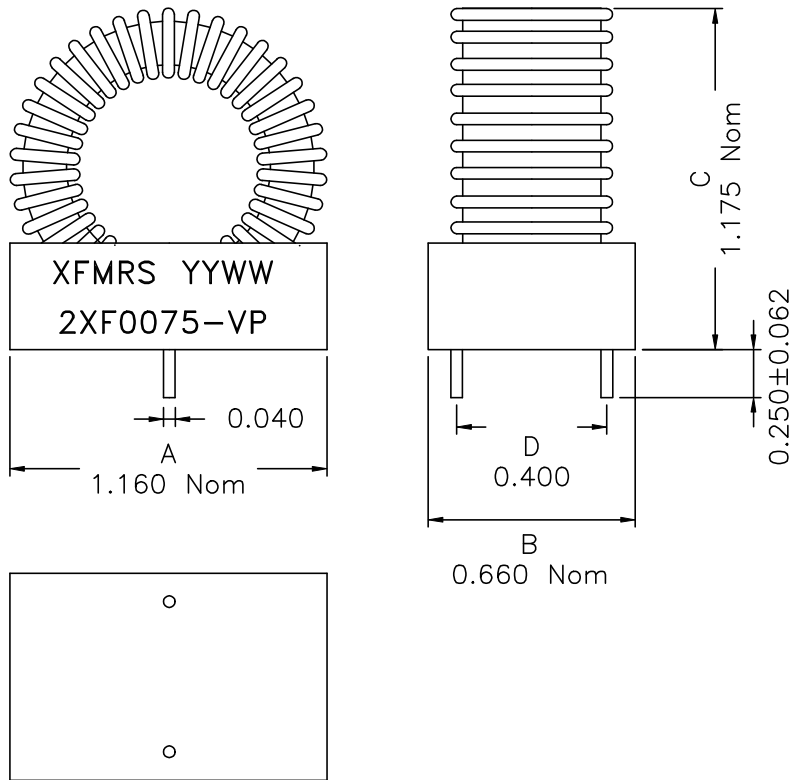

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

**2. Schematic:**



**3. Electrical Specifications: @25°C**

OCL: 75uH±15% @10KHz 0.1V

DC Resistance: 0.035 Ohms Maximum

OCL: 55uH Typ. @10KHz 0.1V 4.0Adc

DOC. REV A/2

<b>XFMRS Inc</b>	Title: TOROIDAL INDUCTOR	
	P/N: 2XF0075-VP	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN.	李小锋 JUN-11-01
	CHK.	廖玉坤 JUN-11-01
SHEET 1 OF 1	APP.	Joe Huff JUN-11-01