



◆ COMS Buffer

◆ High Speed Operation : $t_{pd} = 2.05\text{ns}$ TYP

◆ Operating Voltage Range : $2\text{V} \sim 5.5\text{V}$

◆ Low Power Consumption : $1\mu\text{A}$ (max)

■ General Description


The ML74UL34MRG is a CMOS Buffer, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

The internal circuit is composed of inverter and buffer, which provide high noise immunity and stable output.

AS the ML74UL04 is integrated into mini molded, SOT-23-5 packages, high density mounting is possible.

■ Pin Configuration

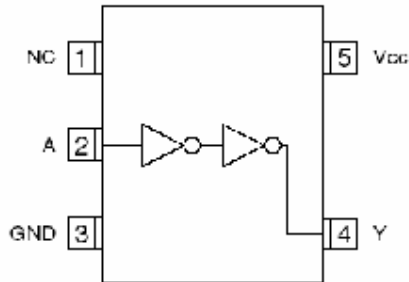

SOT-23-5 (TOP VIEW)

■ Absolute Maximum Ratings

$T_a = -40^\circ\text{C} \sim 85^\circ\text{C}$

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	V _{CC}	-0.5 ~ +6.0	V
Input voltage	V _{IN}	-0.5 ~ +6.0	V
Output Voltage	V _{OUT}	-0.5 ~ V _{CC} +0.5	V
Input Diode Current	I _{IK}	±20	mA
Output Diode current	I _{OK}	±20	mA
Output Current	I _{OUT}	±25	mA
V _{CC} , GND Current	I _{CC} , I _{GND}	±50	mA
Continuous Total Power Dissipation (T _a =55°C)	P _d	150	mW
Storage Temperature	T _{stg}	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

■ Applications

- Crystal Oscillators
- Palmtops
- Digital Equipment

■ Features

High Speed Operation : $t_{pd} = 2.05\text{ns}$ TYP

Operating Voltage Range: $2\text{V} \sim 5.5\text{V}$

Low Power Consumption: $1\mu\text{A}$ (max)

Ultra Small Package : SOT-23-5

■ Function

INPUT	OUTPUT
A	Y
H	H
L	L

H=High level, L=Low level

■ Recommended Operating Conditions

PARAMETER	SYMBOL	V _{cc} (V)	CONDITIONS	UNITS
Supply Voltage	V _{cc}	-	2 ~ 5.5	V
Input Voltage	V _{IN}	-	0 ~ 5.5	V
Output Voltage	V _{OUT}	-	0 ~ V _{cc}	V
Operating Temperature	T _{opr}	-	-40 ~ +85	°C
Output Current	I _{OH}	3.0	-4	mA
		4.5	-8	
	I _{OL}	3.0	4	
		4.5	8	
Input Rise and Fall Time	tr, tf	3.3	0 ~ 100	ns
		5.0	0 ~ 20	

■ DC Electrical Characteristics

PARAMETER	SYMBOL	Vcc(V)	CONDITIONS		Ta=25°C			Ta=-40~85°C		UNITS	
					MIN	TYP	MAX	MIN	MAX		
Input Voltage	VIH	2.0			1.5	-	-	1.5	-	V	
		3.0			2.1	-	-	2.1	-		
		5.5			3.85	-	-	3.85	-		
	VIL	2.0			-	-	0.5	-	0.5	V	
		3.0			-	-	0.9	-	0.9		
		5.5			-	-	1.65	-	1.65		
Output Voltage	VOH	2.0	VIN=VIH or VIL	IOH=-50μA	1.9	2.0	-	1.9	-	V	
		3.0			2.9	3.0	-	2.9	-		
		4.5			4.4	4.5	-	4.4	-		
		3.0		IOH=-4mA		2.58	-	-	2.48		-
		4.5		IOH=-8mA		3.94	-	-	2.80		-
	VOL	2.0	VIN=VIH	IOL=50μA	-	-	0.1	-	0.1	V	
		3.0			-	-	0.1	-	0.1		
		4.5			-	-	0.1	-	0.1		
		3.0		IOL =4mA		-	-	0.36	-		0.44
		4.5		IOL =8mA		-	-	0.36	-		0.44
	Input Current	IIN	5.5	VIN=Vcc or GND		-0.1	-	0.1	-1.0	1.0	μA
	Quiescent Supply Current	Icc	5.5	VIN=Vcc or GND, IOUT=0μA		-	-	1.0	-	10.0	


■ Switching Electrical Characteristics

PARAMETER	SYMBOL	C _L	V _{cc} (V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	t _{PLH}	15pF	3.3		-	2.7	7.1	1.0	8.5	ns
			5.0		-	2.1	5.5	1.0	6.5	
		50pF	3.3		-	4.1	10.6	1.0	12	ns
			5.0		-	3.2	7.5	1.0	8.5	
	t _{PHL}	15pF	3.3		-	2.5	7.1	1.0	8.5	ns
			5.0		-	2.0	5.5	1.0	6.5	
		50pF	3.3		-	3.9	10.6	1.0	12	ns
			5.0		-	3.0	7.5	1.0	8.5	
Input Capacitance	C _{IN}	-	5.0	V _{IN} =V _{cc} or GND	-	2	10	-	10	pF
Power Dissipation Capacitance	C _{pd}	No Load, f=1MHz			-	8.9	-	-	-	pF


Tr=tf=3ns



■ Typical Application Circuit

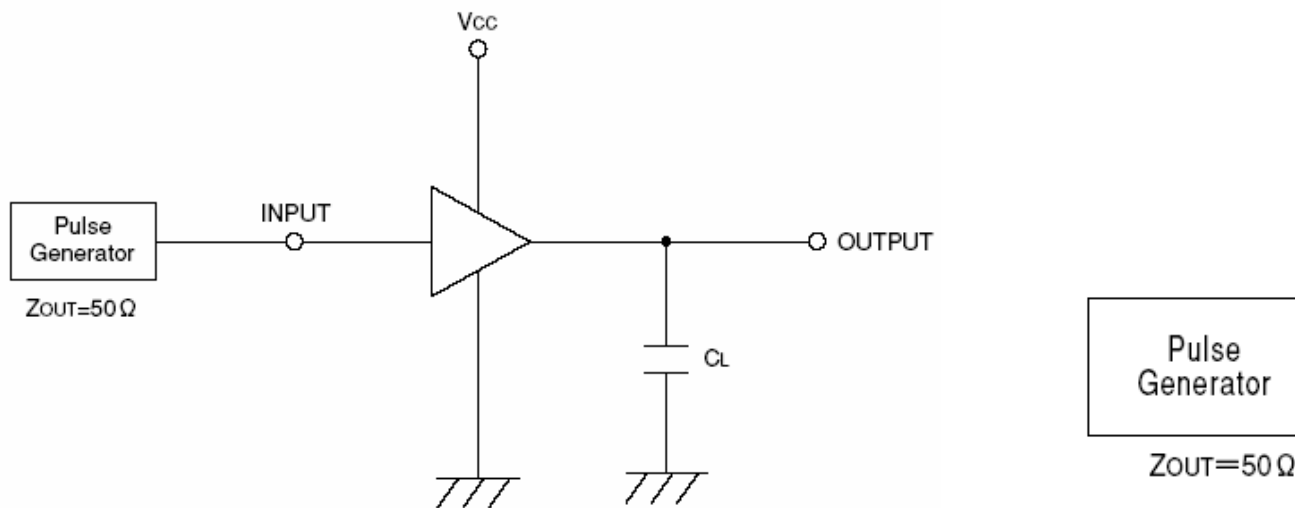

■ Waveforms

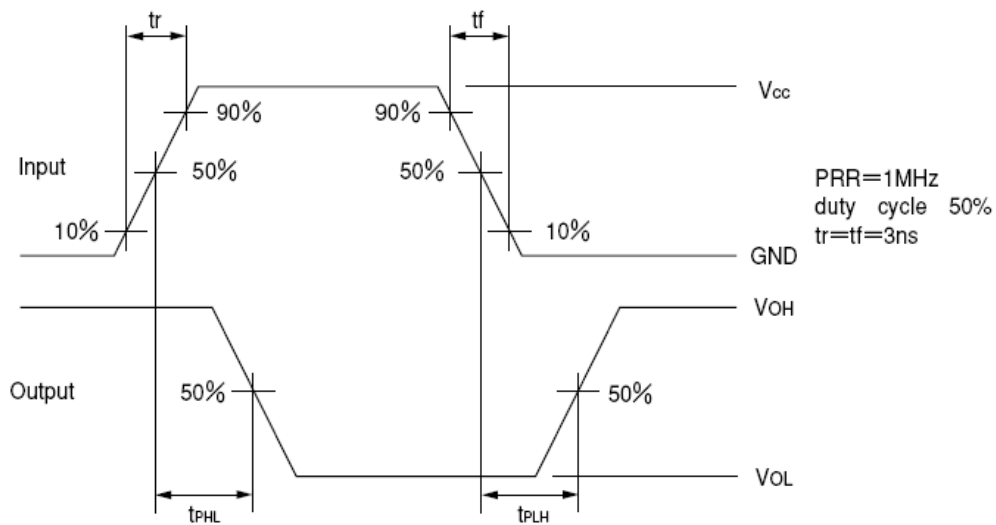

DISCLAIMER:

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.