




- Space saving RJ-45 Connectors
- Available in Single or Multiple Ports

Electrical Parameters @ 25° C


Turns Ratio (± 5%)	OCL (μH Min.)	DCR (Max.)				Common Mode Rejection (dB Min.)				
		Xmit/Rcv	@ 10 KHz, 0.1Vrms	P1-J1	P2-J2	P3-J3	P6-J6	@ 5 Mhz	@ 20 Mhz	@ 70 Mhz
1:1 / 1:1	65	0.5	0.5	0.5	0.5	-15	-15	-20	-17	-6

• Isolation : 1500 Vrms •

Package

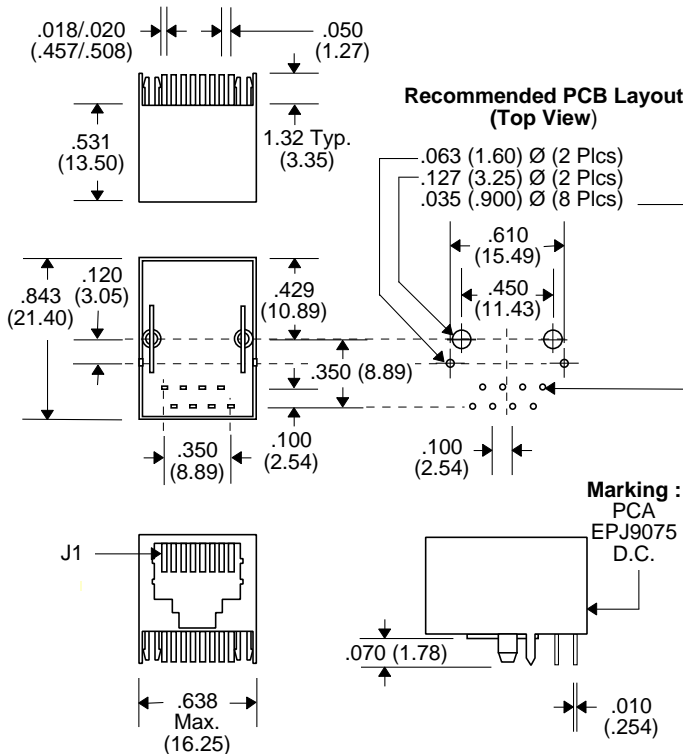

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25