


features

- Surface mount
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: Black body color with white marking (0603, 0805, 1008)
White body color with no marking (0402)
- Products with lead-free terminations meet EU RoHS requirements

dimensions and construction

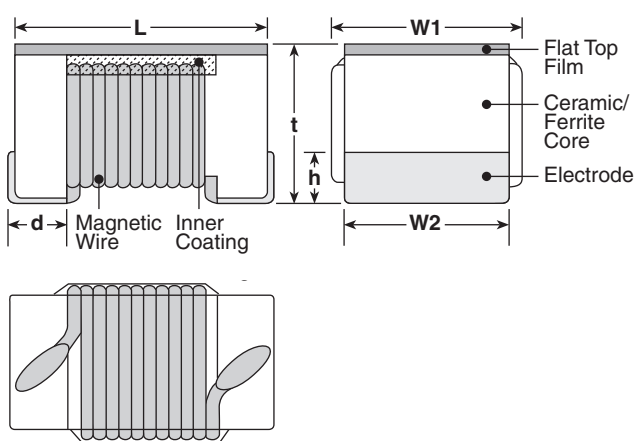

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+0.008} ₋₀ (1.8 ^{+0.2} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Resistance 10N: 10nH R10: 0.1µH 1R0: 1.0µH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)																
KQT0402T**1N0*	—	1.0	250	B: ± 0.1 nH C: ± 0.2 nH	16	250	11000	0.045	1360																
KQT0402T**1N9*		1.9					19			9600	0.070	1040													
KQT0402T**2N0*		2.0											18	8000	0.068	960									
KQT0402T**2N2*		2.2															17	0.120	700						
KQT0402T**2N4*		2.4																		19	7200	0.066	840		
KQT0402T**2N7*		2.7			18			6000	0.091								800								
KQT0402T**3N3*		3.3					20			5800	0.083	760													
KQT0402T**3N6*		3.6											22	5800	0.104	680									
KQT0402T**3N9*		3.9																20	4200					0.150	650
KQT0402T**4N3*		4.3																							
KQT0402T**4N7*		4.7		20	4000	0.150	650																		
KQT0402T**5N1*		5.1						21	3900	0.195	480														
KQT0402T**5N6*		5.6		24	3680	0.120	640																		
KQT0402T**6N2*		6.2						25	3100	0.230	500														
KQT0402T**6N8*		6.8										24	3040	0.202	480										
KQT0402T**7N5*		7.5														25	3000	0.250	450						
KQT0402T**8N2*		8.2																		24	2800	0.323	400		
KQT0402T**8N7*		8.7																						25	2700
KQT0402T**9N0*		9.0						24	2480	0.298	400														
KQT0402T**9N5*		9.5										24	2400	0.354	400										
KQT0402T**10N*		10						24	2320	0.560	320														
KQT0402T**11N*		11										25	2300	0.550	300										
KQT0402T**12N*		12		24	2240	0.620	320																		
KQT0402T**13N*		13						25	2200	0.810	300														
KQT0402T**15N*		15		20	2100	0.830	150																		
KQT0402T**16N*		16						25	2100	0.835	240														
KQT0402T**18N*		18		2800	1.170	1.120	200																		
KQT0402T**19N*		19						2000	1.800	2.090	130														
KQT0402T**20N*		20		1800	1.800	2.090	130																		
KQT0402T**22N*		22						1600	2.320	2.320	120														
KQT0402T**23N*		23		1500	2.320	2.320	120																		
KQT0402T**24N*		24						1500	2.320	2.320	120														
KQT0402T**27N*		27		1500	2.320	2.320	120																		
KQT0402T**30N*		30						1500	2.320	2.320	120														
KQT0402T**33N*		33		1500	2.320	2.320	120																		
KQT0402T**34N*		34						1500	2.320	2.320	120														
KQT0402T**36N*		36		1500	2.320	2.320	120																		
KQT0402T**39N*		39						1500	2.320	2.320	120														
KQT0402T**40N*		40		1500	2.320	2.320	120																		
KQT0402T**43N*		43						1500	2.320	2.320	120														
KQT0402T**47N*	47	1500	2.320	2.320	120																				
KQT0402T**51N*	51					1500	2.320	2.320	120																
KQT0402T**56N*	56	1500	2.320	2.320	120																				
KQT0402T**68N*	68					1500	2.320	2.320	120																
KQT0402T**82N*	82	1500	2.320	2.320	120																				
KQT0402T**R10*	100					1500	2.320	2.320	120																
KQT0402T**R12*	120	1500	2.320	2.320	120																				

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to pages 222-223.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/27/07

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9			5900		0.08		
KQ0603TTE4N3*	F	4.3					0.063		
KQ0603TTE4N7*	G	4.7			20		5800	0.116	
KQ0603TTE5N1*	Y	5.1						0.115	
KQ0603TTE6N8*	2	6.8			27		4800	0.11	
KQ0603TTE7N5*	H	7.5						0.106	
KQ0603TTE8N2*	A	8.2		28	4600		0.12		
KQ0603TTE8N7*	J	8.7					0.109		
KQ0603TTE9N5*	B	9.5		31	4800		0.125		
KQ0603TTE10N*	3	10					0.13		
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		35	3300		0.17		
KQ0603TTE16N*	L	16					0.104		
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22					0.19		
KQ0603TTE23N*	S	23	38	3000	0.15				
KQ0603TTE24N*	M	24			0.135				
KQ0603TTE27N*	8	27	40	2800	0.22				
KQ0603TTE30N*	N	30			0.144				
KQ0603TTE33N*	9	33	40	2300	0.22				
KQ0603TTE36N*	P	36			0.25				
KQ0603TTE39N*	0	39	40	2200	2000	0.28			
KQ0603TTE43N*	Q	43				0.30			
KQ0603TTE47N*	1	47	38	1900	0.31				
KQ0603TTE51N*	T	51			0.34				
KQ0603TTE56N*	2	56	37	1700	0.49				
KQ0603TTE68N*	3	68			0.54				
KQ0603TTE72N*	4	72	34	1400	0.58				
KQ0603TTE82N*	5	82			0.61				
KQ0603TTER10*	6	100	32	1300	0.65				
KQ0603TTER11*	7	110			1.4				
KQ0603TTER12*	8	120	1400	1300	2.2				
KQ0603TTER15*	9	150			2.3				
KQ0603TTER18*	0	180	25	1200	2.5				
KQ0603TTER20*	U	200			2.4				
KQ0603TTER21*	V	210	24	1000	2.3				
KQ0603TTER22*	1	220			170				
KQ0603TTER25*	W	250	30	900	3.17				
KQ0603TTER27*	2	270			3.0				
KQ0603TTER30*	X	300	30	840	3.7				
KQ0603TTER33*	3	330			190				
KQ0603TTER39*	4	390	50	700	1.21				
KQ0603TTER47*	5	470			1.26				
KQ0603TTER51*	V	510		610	170				

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 222-223.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/08

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)						
KQ0603TTER56*	6	560	50	J: $\pm 5\%$ K: $\pm 10\%$	30	50	560	2.09	130						
KQ0603TTER62*	W	620					590	1.89	150						
KQ0603TTER68*	7	680					540	1.97	140						
KQ0603TTER75*	X	750					530	2.04	130						
KQ0603TTER82*	8	820					490	3.09	110						
KQ0603TTER91*	Y	910					480	2.95	120						
KQ0603TTE1R0*	9	1000					440	5.13	90						
KQ0603TTE1R2*	0	1200					400	5.45	80						
KQ0805TTE3N3*	0	3.3					250	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	50	1500	6000	0.08	600		
KQ0805TTE6N8*	1	6.8	1000	5500	0.11										
KQ0805TTE8N2*	2	8.2	4700	0.12											
KQ0805TTE12N*	3	12	4000	0.15											
KQ0805TTE15N*	4	15	3400	0.17											
KQ0805TTE18N*	5	18	3300	0.20											
KQ0805TTE20N*	Y	20	500	55	2600	0.22			500						
KQ0805TTE22N*	6	22			2500	0.25									
KQ0805TTE27N*	7	27			2050	0.27									
KQ0805TTE33N*	8	33			2000	0.29									
KQ0805TTE39N*	9	39			1650	0.34									
KQ0805TTE43N*	4	43			1550	0.34									
KQ0805TTE47N*	0	47	200	60	1450	0.38	400								
KQ0805TTE56N*	1	56			1300	0.42									
KQ0805TTE68N*	2	68			1200	0.46									
KQ0805TTE82N*	3	82			1100	0.51									
KQ0805TTER10*	4	100			920	0.56									
KQ0805TTER12*	5	120			100	50		870	0.64	350					
KQ0805TTER15*	6	150	850	0.70											
KQ0805TTER16*	H	160	48	250			650	1.0							
KQ0805TTER17*	J	170					600	1.4							
KQ0805TTER18*	7	180					560	1.5							
KQ0805TTER19*	D	190					375	1.76							
KQ0805TTER20*	E	200			50	100	340	1.9	250						
KQ0805TTER21*	F	210					25	50		188	2.2	190			
KQ0805TTER22*	8	220	215	2.35						180					
KQ0805TTER23*	K	230	50	500							4100		0.08	1000	
KQ0805TTER24*	L	240									3300		0.09		
KQ0805TTER25*	G	250									3000		0.10		
KQ0805TTER27*	9	270			350	2500			0.11						
KQ0805TTER33*	0	330			50	J: $\pm 5\%$ K: $\pm 10\%$	33	100	375		1.76	250			
KQ0805TTER39*	1	390								23			50		50
KQ0805TTER47*	2	470	23	50										50	
KQ0805TTER56*	3	560			23	50	50	188	2.2		190				
KQ0805TTER68*	4	680								23		50	50		188
KQ0805TTER82*	5	820	23	50										50	
KQ1008TTE10N*	10N	10			50	J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$	50	500	4100		0.08				
KQ1008TTE12N*	12N	12							3300	0.09					
KQ1008TTE15N*	15N	15	3000	0.10											
KQ1008TTE18N*	18N	18	350	2500					0.11						

* Add tolerance character (C, G, H, J, K, M)
For complete environmental specifications, please refer to pages 222-223.

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQ1008TTE22N*	22N	22	50	J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$	55	350	2400	0.12	1000	
KQ1008TTE27N*	27N	27					60	1600		0.13
KQ1008TTE33N*	33N	33			65			1500		0.15
KQ1008TTE39N*	39N	39					60	1300		0.16
KQ1008TTE47N*	47N	47			60			1000		0.18
KQ1008TTE56N*	56N	56					60	950		0.20
KQ1008TTE68N*	68N	68			60			850		0.22
KQ1008TTE82N*	82N	82					60	750		0.56
KQ1008TTER10*	R10	100	25	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	45	100		0.63	650	
KQ1008TTER12*	R12	120					45	850	0.70	580
KQ1008TTER15*	R15	150			45			750	0.77	620
KQ1008TTER18*	R18	180					45	700	0.84	500
KQ1008TTER22*	R22	220			45			600	0.91	500
KQ1008TTER27*	R27	270					45	570	1.05	450
KQ1008TTER33*	R33	330			45			500	1.12	470
KQ1008TTER39*	R39	390					45	450	1.19	
KQ1008TTER47*	R47	470			45			415	1.33	400
KQ1008TTER56*	R56	560					45	375	1.40	300
KQ1008TTER62*	R62	620			45			360	1.47	400
KQ1008TTER68*	R68	680					45	320	1.54	360
KQ1008TTER75*	R75	750			45			350	1.61	400
KQ1008TTER82*	R82	820					35	50	320	1.68
KQ1008TTER91*	R91	910			35				50	290
KQ1008TTE1R0*	1R0	1000					28	50		250
KQ1008TTE1R2*	1R2	1200	28	50	200	1.7				
KQ1008TTE1R5*	1R5	1500			22	25	160	1.9	270	
KQ1008TTE1R8*	1R8	1800	22	25			140	2.2	250	
KQ1008TTE2R2*	2R2	2200			20	25	110	2.7	230	
KQ1008TTE2R7*	2R7	2700	20	25			100	2.8		
KQ1008TTE3R3*	3R3	3300			15	7.9	90	3.1	210	
KQ1008TTE3R9*	3R9	3900	15	7.9			80	2.1	240	
KQ1008TTE4R7*	4R7	4700			15	7.9	70	2.3	200	
KQ1008TTE5R6*	5R6	5600	15	7.9			65	2.5	170	
KQ1008TTE6R8*	6R8	6800			15	7.9	60	2.9	150	
KQ1008TTE8R2*	8R2	8200								
KQ1008TTE100*	100	10000								

* Add tolerance character (C, G, H, J, K, M)

Inductors





For complete environmental specifications, please refer to pages 222-223.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.





11/22/08

environmental applications

L-Frequency Characteristics

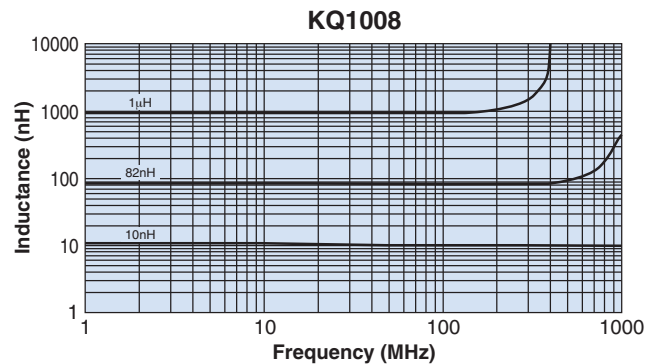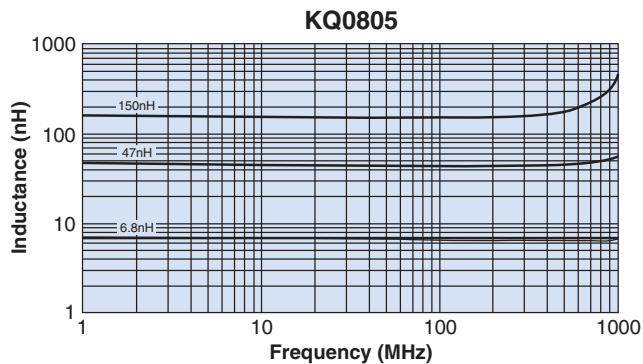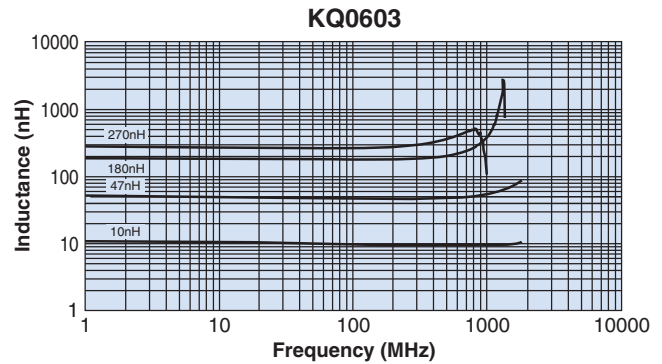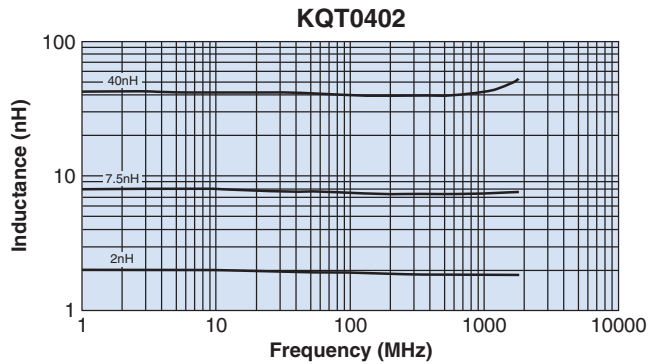

Q-Frequency Characteristics

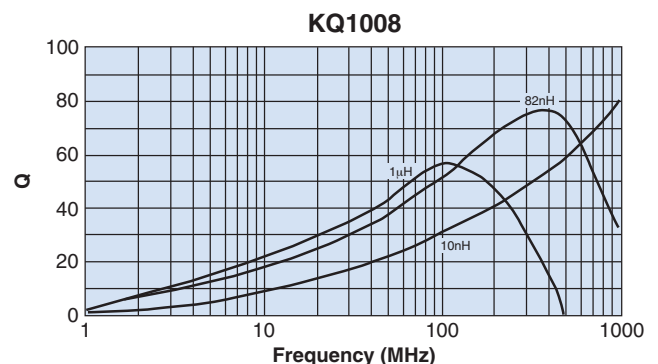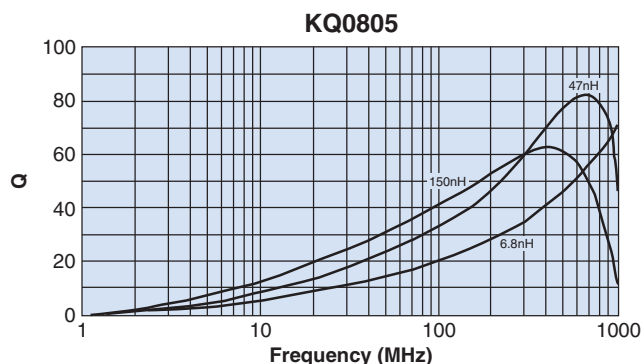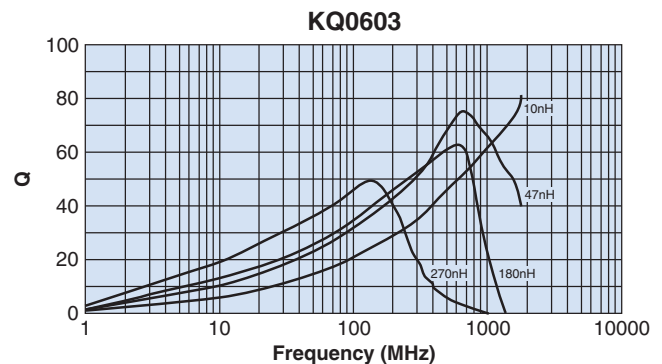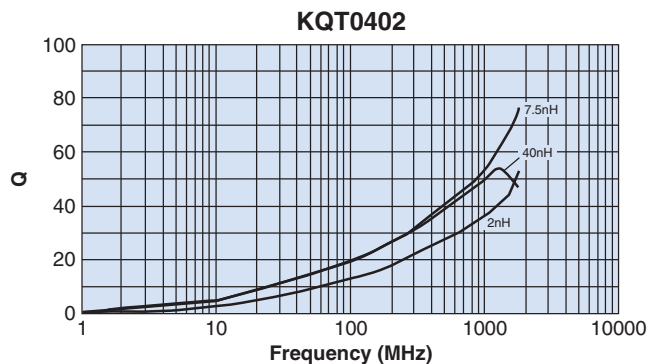

Test equipment: HP4291A impedance analyzer

environmental applications (continued)

Performance Characteristics

Parameter	Requirements Maximum Limit	Δ L/L Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 2.7\%$ Δ Q/Q: $\pm 6.6\%$	260°C \pm 5°C, 10s \pm 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 2.1\%$ Δ Q/Q: $\pm 5.3\%$	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 1.8\%$ Δ Q/Q: $\pm 2.8\%$	-40°C \pm 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 1.8\%$ Δ Q/Q: $\pm 5.3\%$	125°C \pm 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 0.9\%$ Δ Q/Q: $\pm 6.9\%$	40°C \pm 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215