

**Round Tower Type LED lamp**
**BL-L189**
**Features:**

- 1.8 mm Round Tower Type LED Lamps..
- Ultra brightness.
- Choice of various viewing angles.
- Full color Display application.
- IC compatible /Low current capability.
- RoHs Compliance


**Electrical-optical characteristics: (Ta=25 ) (Test Condition: IF=20mA)**

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (lv) Unit:mcd		Viewing Angle 2θ1/2(deg)
	Emitted Color	Material	λ <sub>P</sub> (nm)		Typ	Max	Min.	Typ.	
BL-L189SRC	Hi Red	AlGaAs,SH	660	Water Clear	1.85	2.20	50	200	50
BL-L189LRC	Super Red	AlGaAs,DH	660		1.85	2.20	200	500	
BL-L189URC	Ultra Red	AlGaAs,DDH	660		1.95	2.20	500	700	
BL-L189UEC	Ultra Orange	AlGaInP	630		2.10	2.50	120	700	
BL-L189UYC	Ultra Yellow	AlGaInP	590		2.10	2.50	150	600	
BL-L189UGC	Ultra Green	AlGaInP	574		2.20	2.50	50	800	
BL-L189PGC	Ultra Pure Green	InGaN	525		3.80	4.50	400	1200	
BL-L189BGC	Ultra Bluish Green	InGaN	505		3.80	4.50	400	1000	
BL-L189BC	Blue	InGaN	430		3.80	4.50	400	800	
BL-L189UBC	Ultra Blue	InGaN	470		2.70	4.20	400	1200	
BL-L189VC	UV	InGaN	405		3.80	4.50	100	150	
BL-L189UWC	Ultra White	InGaN	/		2.70	4.20	400	2500	

**Absolute maximum ratings (Ta=25 )**


Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB	UV	W	Unit
Forward Current I <sub>F</sub>	25	25	25	30	30	30	30	30	30	30	30	30	mA
Power Dissipation P <sub>d</sub>	60	60	60	65	65	75	110	110	120	120	120	120	mW
Reverse Voltage V <sub>R</sub>	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I <sub>PF</sub> (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	100	mA
Operation Temperature T <sub>OPR</sub>	-40 to +80												
Storage Temperature T <sub>STG</sub>	-40 to +85												
Lead Soldering Temperature TSOL	Max.260 ± 5 for 3 sec Max. (1.6mm from the base of the epoxy bulb)												

Round Tower Type LED lamp

BL-L189

Package configuration & Internal circuit diagram

# BL-L189 Series

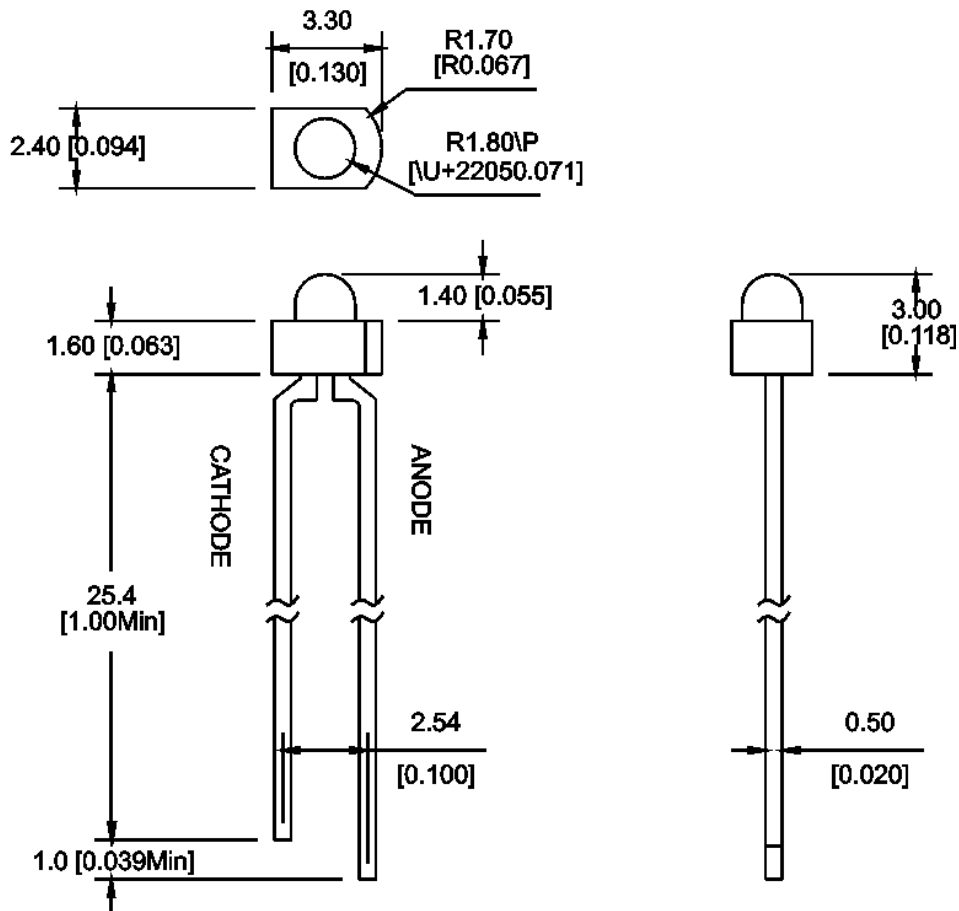


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.

## Round Tower Type LED lamp

BL-L189

### Typical electrical-optical characteristics curves:

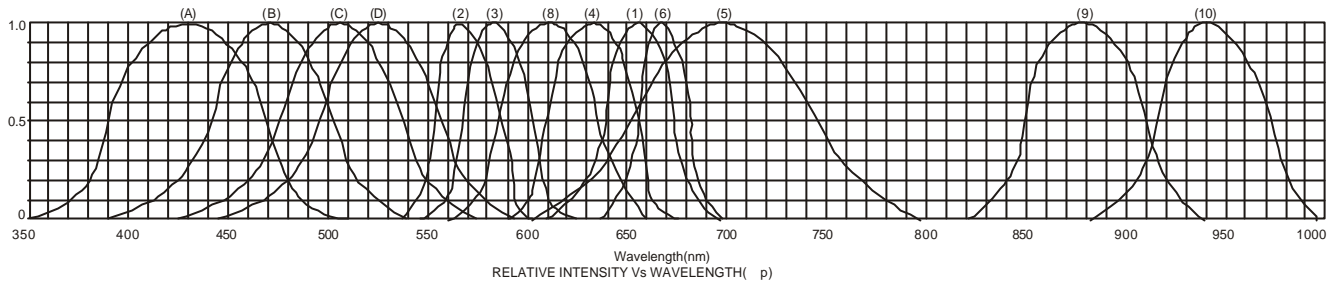


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAl/SiC 525nm/Ultra Green



FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE




FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

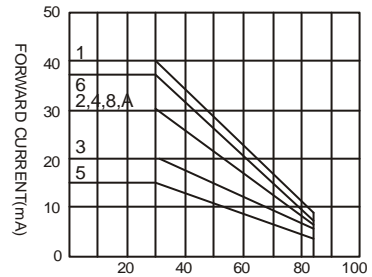

AMBIENT TEMPERATURE Ta( )  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE



AMBIENT TEMPERATURE Ta( )

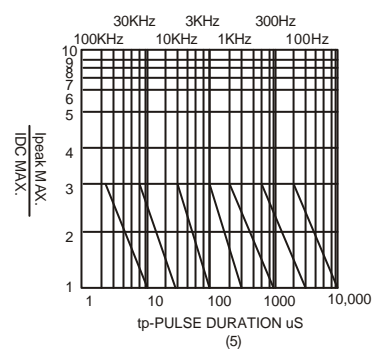

NOTE:25 free air temperature unless otherwise specified