


EPB5025




- Matched to Brooktree's BT8921/BT8970
- 70 mA DC Current
- 784 Kbps Application (2 pair)
- 1500 Vrms Isolation Minimum
- Temperature Range : -40°C to +85°C


Electrical Parameters @ 25° C

Inductance Line Side (mH ± 6%)	Leakage Inductance (μH Max.)	Return Loss (dB Min.)		Longitude Balance (dB Typ.)	THD (dB Typ.)	DCR (Ω Max.)
		40-200 KHz	4 KHz-2 MHz			
		40-200 KHz	4 KHz-2 MHz	@ 196 KHz, 135 Ω	@ 200 KHz, 6 Vp-p	Pins 2-4,6-7,8-9
3	8	-20	-4	-55	-75	2.2

Schematic

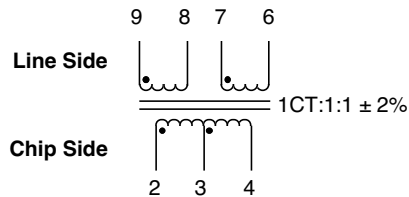

Package

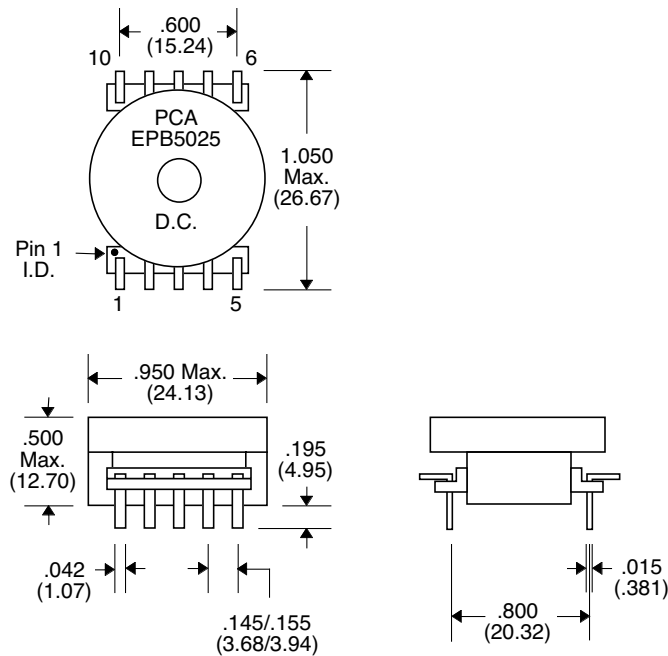

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25