




**TERMINAL BLOCKS**

**3.81mm PITCH PLUG IN**


- 3.81mm Pitch
- UL/ CE approved
- Flame Retardant Material
- Closed end headers
- 1mm<sup>2</sup> wire acceptance
- Professional rising clamp

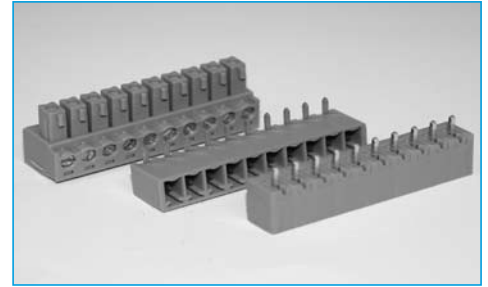

**SPECIFICATION**

<b>Rating:</b>	9A/130V	<b>Pin/terminal:</b>	5μ tinned, phosphor bronze
<b>Dielectric Strength:</b>	≥1.25KV/60sec	<b>Rising clamp:</b>	5μ Nickel copper flash brass
<b>Insulation Resistance:</b>	≥5MΩ	<b>Screw/torque:</b>	M2 steel, 6μ zinc, colour passivated and tropicalised/0.4Nm
<b>Working temperature:</b>	-20°C to 125°C	<b>Recommended PCB hole size:</b>	ø1.0mm
<b>Short Period:</b>	160°		
<b>Moulding:</b>	UL94V-0 flame retardant PA66		

**OUTLINE DRAWING**

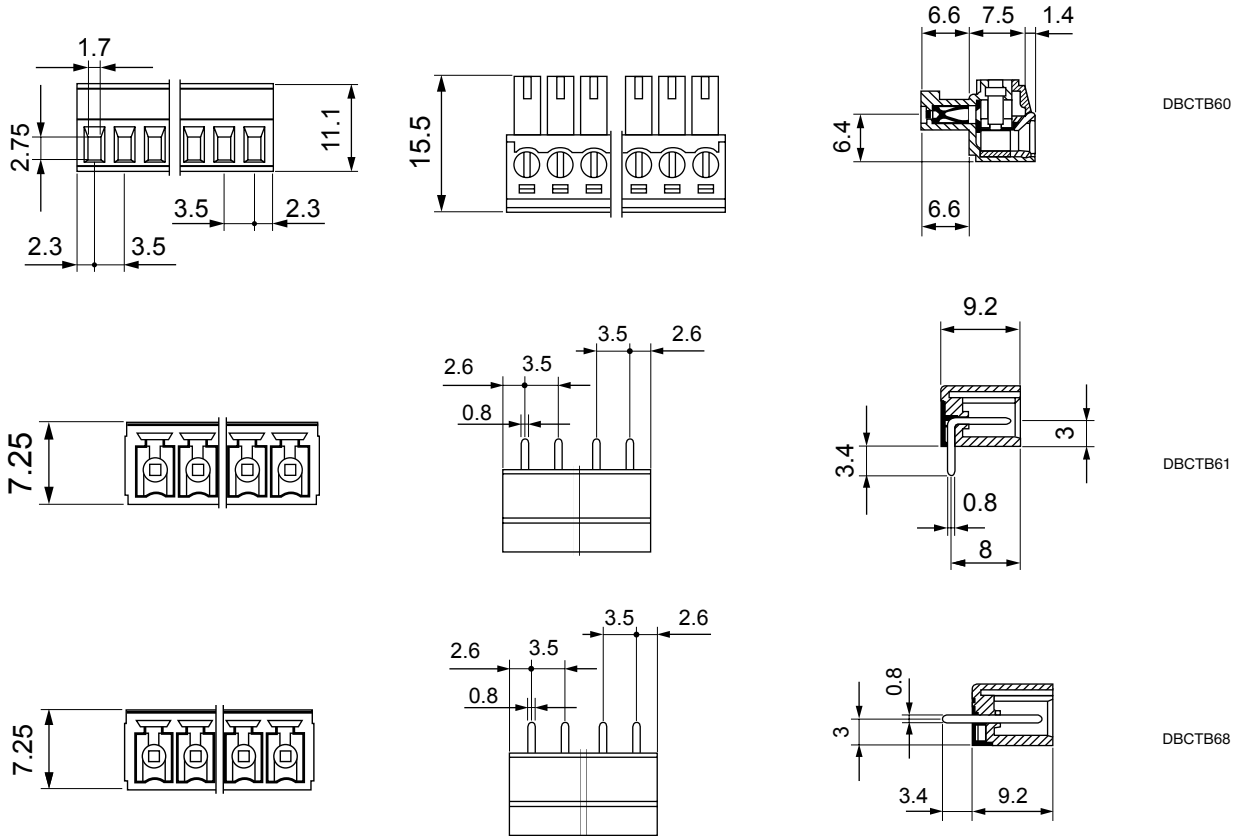

**ORDERING INFORMATION**

DBC	TB	60	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
		60=Style 60	2 = 2 ways
		68=Style 68	3 = 3 ways
		61=Style 61	

\* Other Number of ways are available up to 12  
Please consult office for further details