FUJITSU MICROELECTRONICS
DATA SHEET

DS04-27245-2E

ASSP for Power Management Applications

1 ch DC/DC Converter IC Built-in Switching FET & POWERGOOD function, PFM/PWM Synchronous Rectification, and Down Conversion Support

MB39C006A

■ DESCRIPTION

The MB39C006A is a current mode type 1-channel DC/DC converter IC built-in switching FET, synchronous rectification, and down conversion support. The device is integrated with a switching FET, oscillator, error amplifier, PFM/PWM control circuit, reference voltage source, and POWERGOOD circuit.
External inductor and decoupling capacitor are needed only for the external component.
MB39C006A is small, achieve a highly effective DC/DC converter in the full load range, this is suitable as the built-in power supply for handheld equipment such as mobile phone/PDA, DVDs, and HDDs.

■ FEATURES

- High efficiency : 96% (Max)
- Low current consumption : 30 µA (at PFM)
- Output current (DC/DC) : 800 mA (Max)
- Input voltage range : 2.5 V to 5.5 V
- Operating frequency : 2.0/3.2 MHz (Typ)
- Built-in PWM operation fixed function
- No flyback diode needed
- Low dropout operation : For 100% on duty
- Built-in high-precision reference voltage generator : 1.20 V ± 2%
- Consumption current in shutdown mode : 1 µA or less
- Built-in switching FET : P-ch MOS 0.3 Ω (Typ) N-ch MOS 0.2 Ω (Typ)
- High speed for input and load transient response in the current mode
- Over temperature protection
- Packaged in a compact package : SON10

■ APPLICATIONS

- Flash ROMs
- MP3 players
- Electronic dictionary devices
- Surveillance cameras
- Portable GPS navigators
- Mobile phones etc.

Copyright©2008-2009 FUJITSU MICROELECTRONICS LIMITED All rights reserved
2009.8

■ PIN ASSIGNMENT

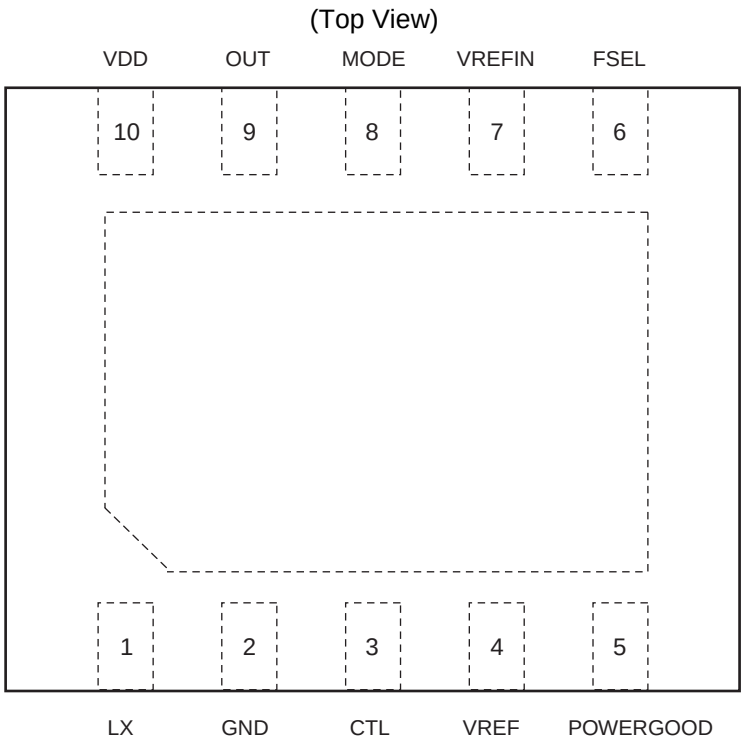

(LCC-10P-M04)

■ PIN DESCRIPTIONS

Pin No	Pin name	I/O	Description
1	LX	O	Inductor connection output pin. High impedance during shut down.
2	GND	—	Ground pin.
3	CTL	I	Control input pin. (L : Shut down / H : Normal operation)
4	VREF	O	Reference voltage output pin.
5	POWERGOOD	O	POWERGOOD circuit output pin. Internally connected to an N-ch MOS open drain circuit.
6	FSEL	I	Frequency switch pin. (L (open) : 2.0 MHz, H : 3.2 MHz)
7	VREFIN	I	Error amplifier (Error Amp) non-inverted input pin.
8	MODE	I	Operation mode switch pin. (L : PFM/PWM mode, OPEN : PWM mode)
9	OUT	I	Output voltage feedback pin.
10	VDD	—	Power supply pin.

■ I/O PIN EQUIVALENT CIRCUIT DIAGRAM

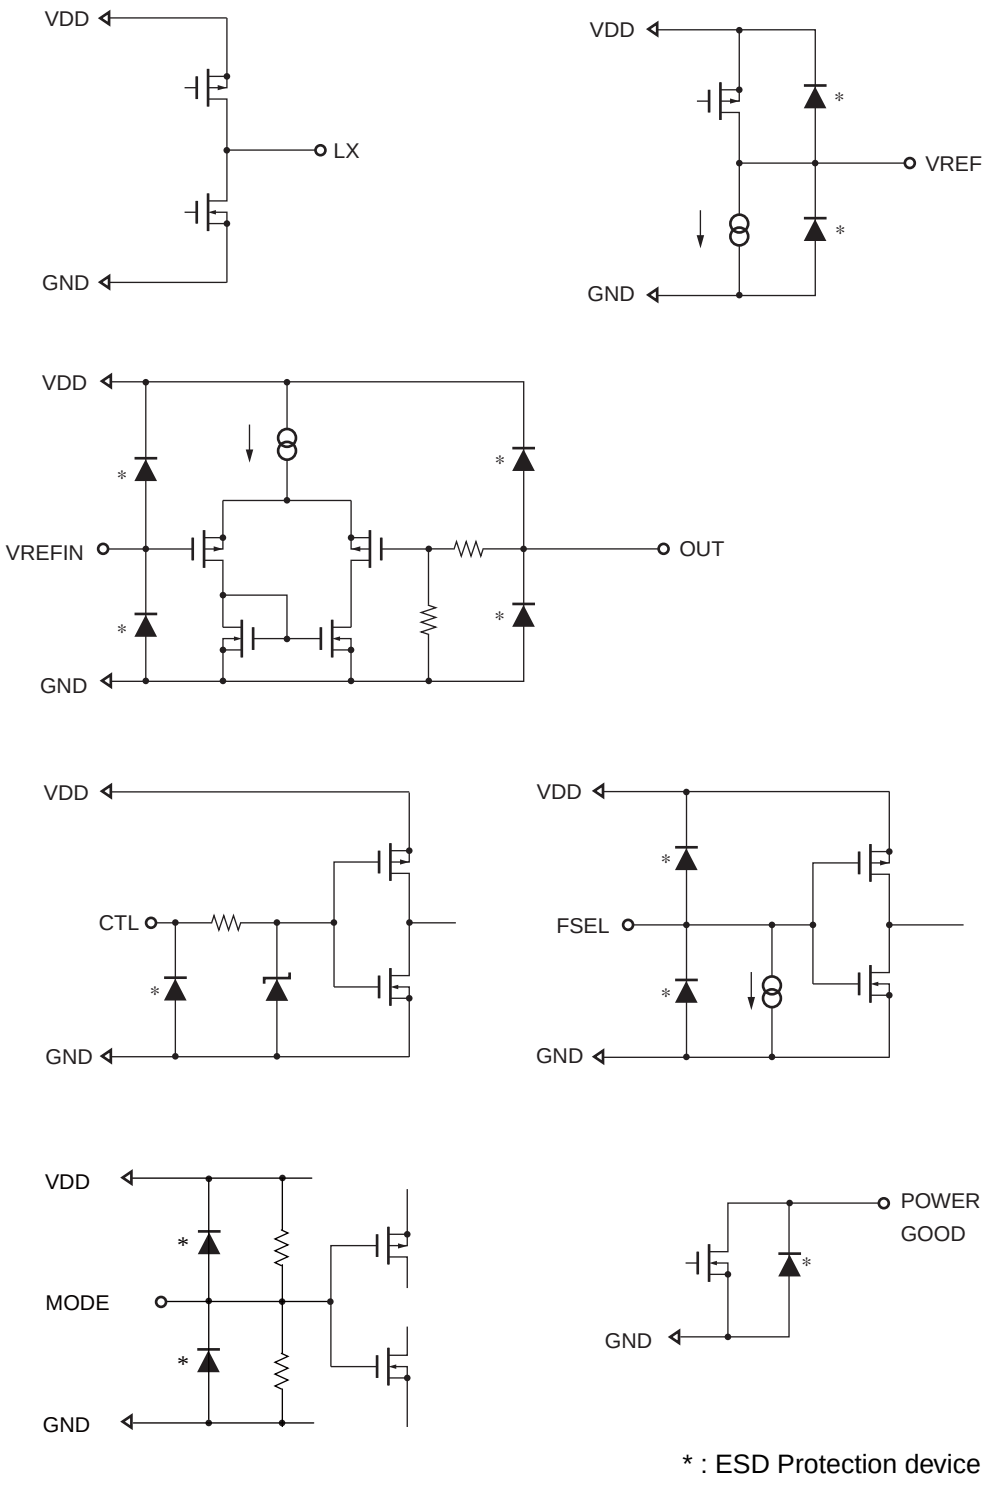

■ BLOCK DIAGRAM

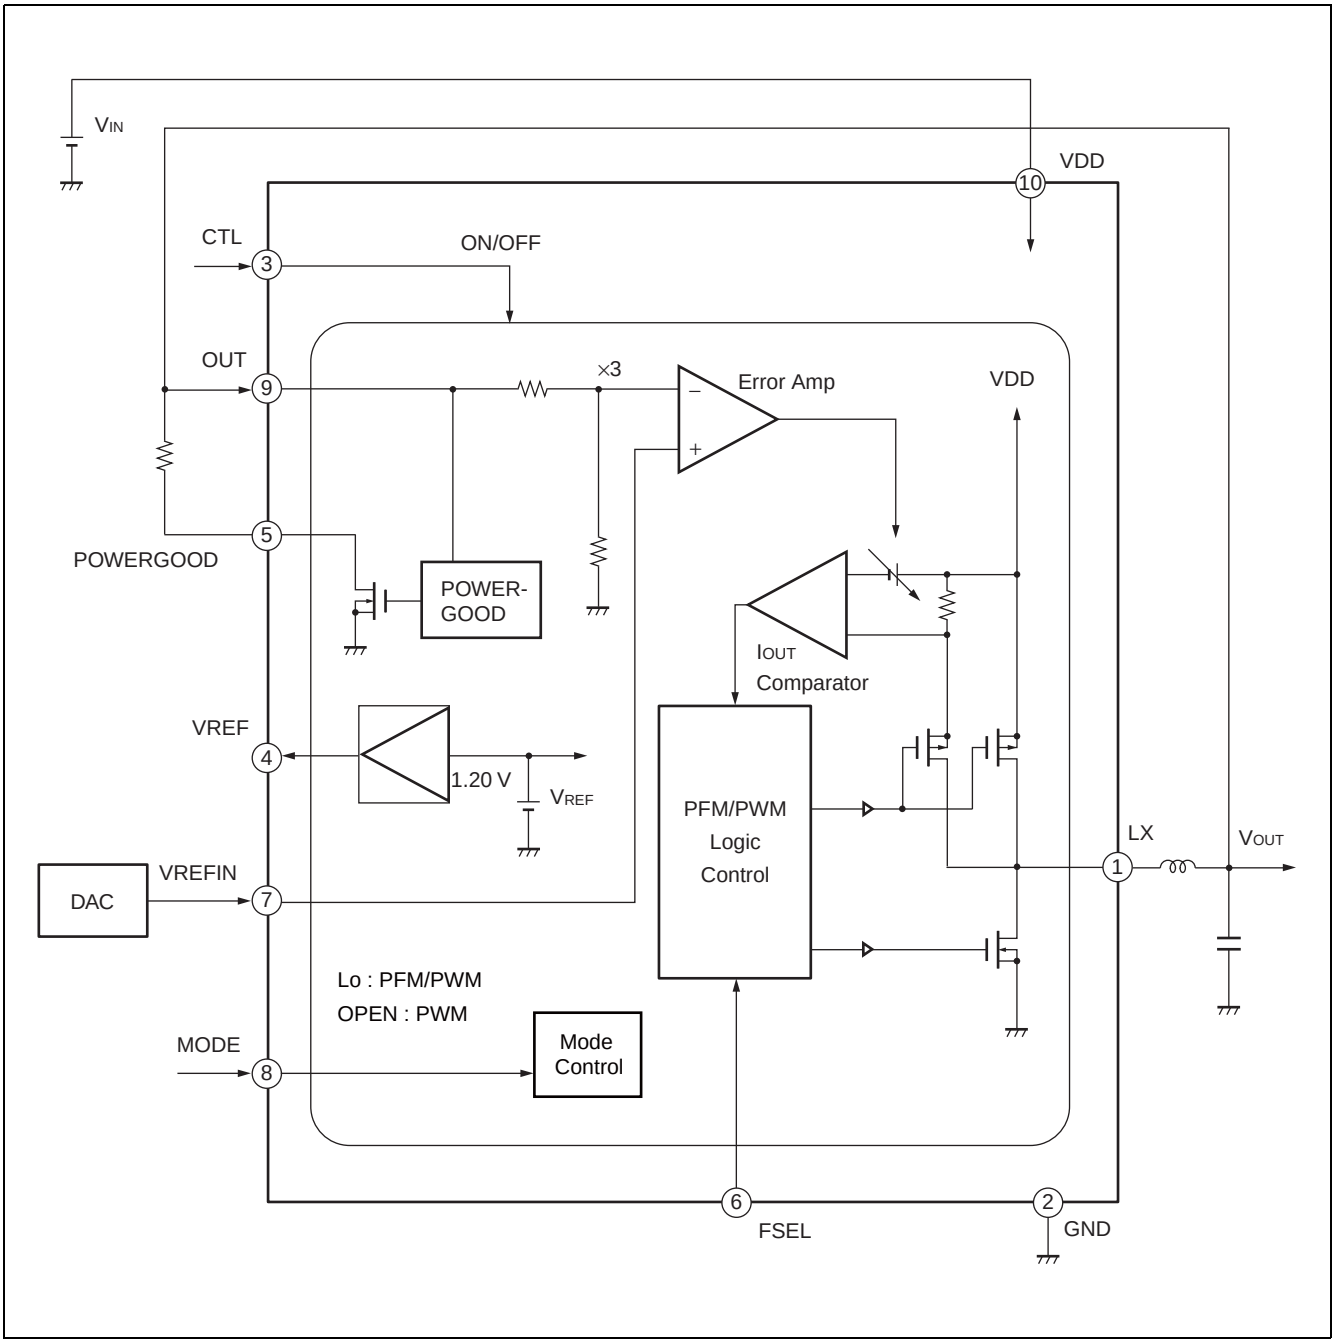

- **Current mode**
  - Original voltage mode type:
    Stabilize the output voltage by comparing two items below and on-duty control.
    - Voltage (V_C) obtained through negative feedback of the output voltage by Error Amp
    - Reference triangular wave (V_{TRI})

  - Current mode type:
    Instead of the triangular wave (V_{TRI}), the voltage (V_{IDET}) obtained through I-V conversion of the sum of currents that flow in the oscillator (rectangular wave generation circuit) and SW FET is used.
    Stabilize the output voltage by comparing two items below and on-duty control.
    - Voltage (V_C) obtained through negative feedback of the output voltage by Error Amp
    - Voltage (V_{IDET}) obtained through I-V conversion of the sum of current that flow in the oscillator (rectangular wave generation circuit) and SW FET

Voltage mode type model

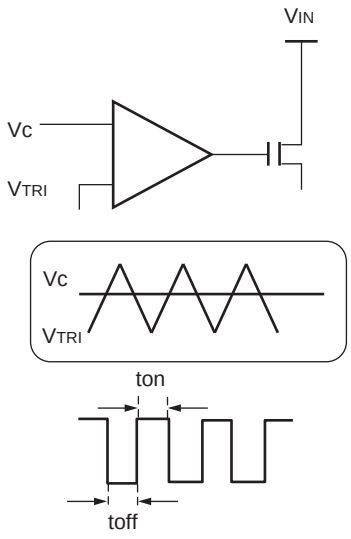

Current mode type model

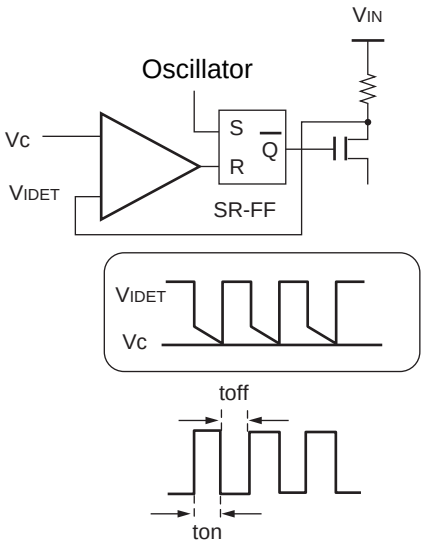

Note : The above models illustrate the general operation and an actual operation will be preferred in the IC.

■ FUNCTION OF EACH BLOCK

• PFM/PWM Logic control circuit

In normal operation, frequency (2.0 MHz/3.2 MHz) which is set by the built-in oscillator (square wave oscillation circuit) controls the built-in P-ch MOS FET and N-ch MOS FET for the synchronous rectification operation. In the light load mode, the intermittent (PFM) operation is executed.
This circuit protects against pass-through current caused by synchronous rectification and against reverse current caused in a non-successive operation mode.

• I_{OUT} comparator circuit

This circuit detects the current (I_{LX}) which flows to the external inductor from the built-in P-ch MOS FET.
By comparing V_{IDET} obtained through I-V conversion of peak current I_{PK} of I_{LX} with the Error Amp output, the built-in P-ch MOS FET is turned off via the PFM/PWM Logic Control circuit.

• Error Amp phase compensation circuit

This circuit compares the output voltage to reference voltages such as VREF. The MB39C006A has a built-in phase compensation circuit that is designed to optimize the operation of the MB39C006A. This needs neither to be considered nor addition of a phase compensation circuit and an external phase compensation device.

• VREF circuit

A high accuracy reference voltage is generated with BGR (bandgap reference) circuit. The output voltage is 1.20 V (Typ).

• POWERGOOD circuit

The POWERGOOD circuit monitors the voltage at the OUT pin. The POWERGOOD pin is open drain output. Use the pin with pull-up using the external resistor in the normal operation.
When the CTL is at the H level, the POWERGOOD pin becomes the H level. However, if the output voltage drops because of over current and etc, the POWERGOOD pin becomes the L level.

Timing chart example : (POWERGOOD pin pulled up to VIN)

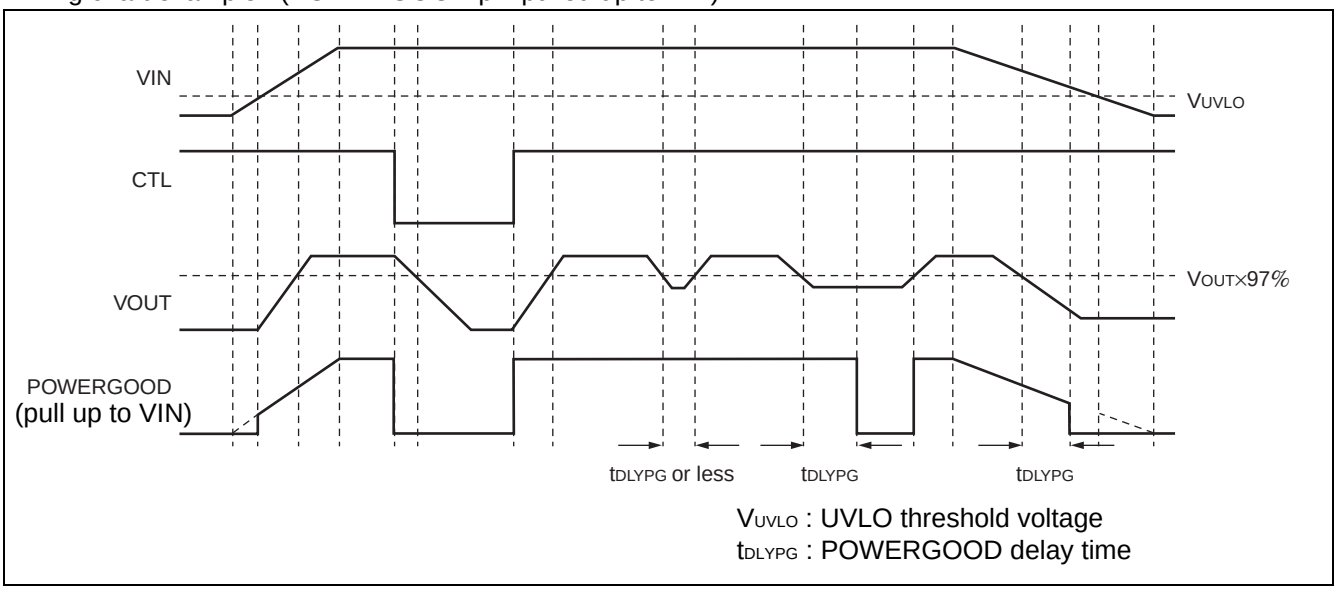

- **Protection circuit**

The MB39C006A has a built-in over-temperature protection circuit.
The over-temperature protection circuit turns off both N-ch and P-ch switching FETs when the junction temperature reaches +135 °C. When the junction temperature drops to + 110 °C, the switching FET returns to the normal operation.
Since the PFM/PWM control circuit of the MB39C006A is in the control method in current mode, the current peak value is also monitored and controlled as required.

- FUNCTION TABLE

MODE		Input			Output		
	Switching frequency	**CTL**	**MODE**	**FSEL**	**OUTPUT pin voltage**	**VREF**	**POWERGOOD**
Shutdown mode	—	L	*	*	Output stop	Output stop	Function stop
PFM/PWM mode	2.0 MHz	H	L	L	VOUT voltage output	1.2 V	Operation
PWM fixed mode	2.0 MHz	H	OPEN	L	VOUT voltage output	1.2 V	Operation
PFM/PWM mode	3.2 MHz	H	L	H	VOUT voltage output	1.2 V	Operation
PWM fixed mode	3.2 MHz	H	OPEN	H	VOUT voltage output	1.2 V	Operation

* : Don't care

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Condition	Rating		Unit
			Min	Max	
Power supply voltage	V_{DD}	VDD pin	− 0.3	+ 6.0	V
Signal input voltage	V_{ISIG}	OUT pin	− 0.3	V_{DD} + 0.3	V
		CTL, MODE, FSEL pins	− 0.3	V_{DD} + 0.3	
		VREFIN pin	− 0.3	V_{DD} + 0.3	
POWERGOOD pull-up voltage	V_{IPG}	POWERGOOD pin	− 0.3	+ 6.0	V
LX voltage	V_{LX}	LX pin	− 0.3	V_{DD} + 0.3	V
LX peak current	I_{PK}	The upper limit value of I_{LX}	—	1.8	A
Power dissipation	P_D	Ta ≤ + 25 °C	—	2632*1, *2, *3	mW
			—	980*1, *2, *4	
		Ta = + 85 °C	—	1053*1, *2, *3	mW
			—	392*1, *2, *4	
Operating ambient temperature	Ta	—	− 40	+ 85	°C
Storage temperature	T_{STG}	—	− 55	+ 125	°C

*1 : See "■ EXAMPLE OF STANDARD OPERATION CHARACTERISTICS • Power dissipation vs. Operating ambient temperature" for the package power dissipation of Ta from + 25 °C to + 85 °C.

*2 : When mounted on a four- layer epoxy board of 11.7 cm × 8.4 cm

*3 : IC is mounted on a four-layer epoxy board, which has thermal via, and the IC's thermal pad is connected to the epoxy board (Thermal via is 4 holes).

*4 : IC is mounted on a four-layer epoxy board, which has no thermal via, and the IC's thermal pad is connected to the epoxy board.

Notes
- The use of negative voltages below − 0.3 V to the GND pin may create parasitic transistors on LSI lines, which can cause abnormal operation.
- This device can be damaged if the LX pin is short-circuited to VDD pin or GND pin.
- Take measures not to keep the FSEL pin falling below the GND pin potential of the MB39C006A as much as possible.
  In addition to erroneous operation, the IC may latch up and destroy itself if 110 mA or more current flows from this pin.

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

■ RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Condition	Value			Unit
			Min	Typ	Max	
Power supply voltage	V_{DD}	—	2.5	3.7	5.5	V
VREFIN voltage	V_{REFIN}	—	0.15	—	1.20	V
CTL voltage	V_{CTL}	—	0	—	5.0	V
LX current	I_{LX}	—	—	—	800	mA
POWERGOOD current	I_{PG}	—	—	—	1	mA
VREF output current	I_{ROUT}	2.5 V ≤ V_{DD} ≤ 3.0 V	—	—	0.5	mA
		3.0 V ≤ V_{DD} ≤ 5.5 V	—	—	1	
Inductor value	L	f_{OSC1} = 2.0 MHz (FSEL = L)	—	2.2	—	µH
		f_{OSC2} = 3.2 MHz (FSEL = H)	—	1.5	—	

Note : The output current from this device has a situation to decrease if the power supply voltage (V_{IN}) and the DC/DC converter output voltage (V_{OUT}) differ only by a small amount. This is a result of slope compensation and will not damage this device.

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

(Continued)

(Ta = + 25 °C, VDD = 3.7 V, VOUT setting value = 2.5 V, MODE = 0 V)

Parameter		Symbol	Pin No.	Condition	Value			Unit
					Min	Typ	Max	
POWER-GOOD block	POWERGOOD threshold voltage	V_{THPG}	5	*3	V_{REFIN} × 3 × 0.93	V_{REFIN} × 3 × 0.97	V_{REFIN} × 3 × 0.99	V
	POWERGOOD delay time	t_{DLYPG1}		FSEL = 0 V	—	250	—	µs
		t_{DLYPG2}		FSEL = 3.7 V	—	170	—	µs
	POWERGOOD output voltage	V_{OL}		POWERGOOD = 250 µA	—	—	0.1	V
	POWERGOOD output current	I_{OH}		POWERGOOD = 5.5 V	—	—	1.0	µA
Control block	CTL threshold voltage	V_{THHCT}	3	—	0.55	0.95	1.45	V
		V_{THLCT}		—	0.40	0.80	1.30	V
	CTL pin input current	I_{ICTL}		CTL = 3.7 V	—	—	1.0	µA
	MODE threshold voltage	V_{THMMD}	8	OPEN setting	—	1.5	—	V
		V_{THLMD}		—	—	—	0.4	V
	MODE pin input current	I_{LMD}		MODE = 0 V	– 0.8	– 0.4	—	µA
	FSEL threshold voltage	V_{THHFS}	6	—	2.96	—	—	V
		V_{THLFS}		—	—	—	0.74	V
Reference voltage block	VREF voltage	V_{REF}	4	VREF = –2.7 µA, OUT = –100 mA	1.176	1.200	1.224	V
	VREF load stability	L_{OADREF}		VREF = –1.0 mA	—	—	20	mV
General	Shut down power supply current	I_{VDD1}	10	CTL = 0 V, All circuits in OFF state	—	—	1.0	µA
		I_{VDD1H}		CTL = 0 V, VDD = 5.5 V	—	—	1.0	µA
	Power supply current at DC/DC operation (PFM mode)	I_{VDD2}		CTL = 3.7 V, MODE = 0 V, OUT = 0 A	—	30	48	µA
	Power supply current at DC/DC operation (PWM fixed mode)	I_{VDD2}		CTL = 3.7 V, MODE = OPEN, OUT = 0 A, FSEL = 0 V	—	4.8	8.0	mA
	Power-on invalid current	I_{VDD}		CTL = 3.7 V, VOUT = 90%*4	—	800	1500	µA

*1 : The minimum value of V_{DD} is the 2.5 V or V_{OUT} setting value + 0.6 V, whichever is higher.

*2 : The + leak at the LX pin includes the current of the internal circuit.

*3 : Detected with respect to the output voltage setting value of V_{REFIN}

*4 : Current consumption based on 100% ON-duty (High side FET in full ON state). The SW FET gate drive current is not included because the device is in full ON state (no switching operation). Also the load current is not included.

■ TEST CIRCUIT FOR MEASURING TYPICAL OPERATING CHARACTERISTICS

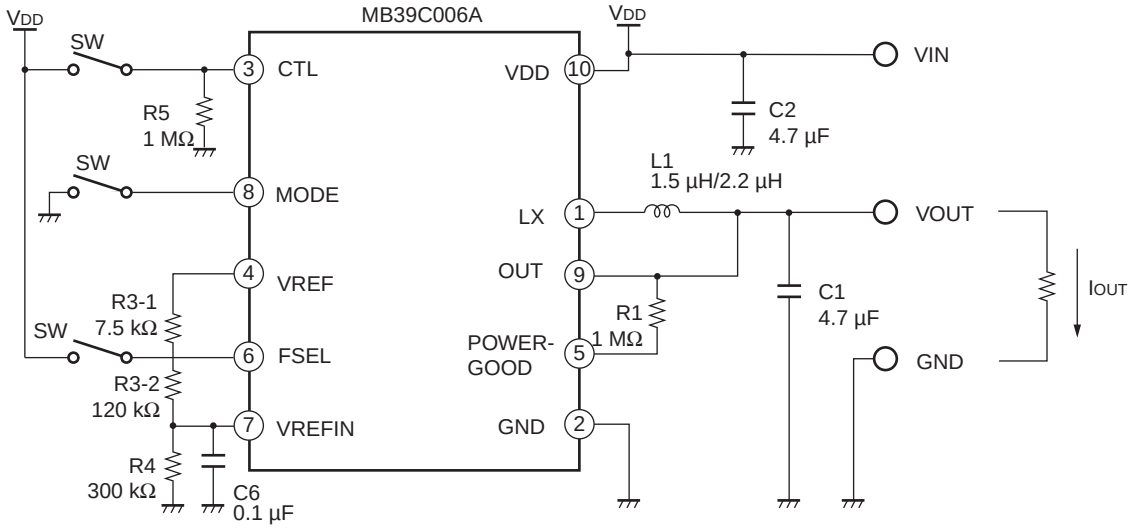

Component	Specification	Vendor	Part Number	Remark
R1	1 MΩ	KOA	RK73G1JTTD D 1 MΩ	
R3-1 R3-2	7.5 kΩ 120 kΩ	SSM SSM	RR0816-752-D RR0816-124-D	At VOUT = 2.5 V setting
R4	300 kΩ	SSM	RR0816-304-D	
R5	1 MΩ	KOA	RK73G1JTTD D 1 MΩ	
C1	4.7 µF	TDK	C2012JB1A475K	
C2	4.7 µF	TDK	C2012JB1A475K	
C6	0.1 µF	TDK	C1608JB1H104K	For adjusting slow start time
L1	2.2 µH	TDK	VLF4012AT-2R2M	2.0 MHz operation
	1.5 µH	TDK	VLF4012AT-1R5M	3.2 MHz operation

Note : These components are recommended based on the operating tests authorized.

TDK : TDK Corporation

SSM : SUSUMU Co., Ltd

KOA : KOA Corporation

■ APPLICATION NOTES

[1] Selection of components

- **Selection of an external inductor**

Basically it dose not need to design inductor. The MB39C006A is designed to operate efficiently with a 2.2 µH (2.0 MHz operation) or 1.5 µH (3.2 MHz operation) external inductor.

The inductor should be rated for a saturation current higher than the LX peak current value during normal operating conditions, and should have a minimal DC resistance. (100 mΩ or less is recommended.)

The LX peak current value I_{PK} is obtained by the following formula.

$$I_{PK} = I_{OUT} + \frac{V_{IN} - V_{OUT}}{L} \times \frac{D}{fosc} \times \frac{1}{2} = I_{OUT} + \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{2 \times L \times fosc \times V_{IN}}$$

L : External inductor value

I_{OUT} : Load current

V_{IN} : Power supply voltage

V_{OUT} : Output setting voltage

D : ON- duty to be switched(= V_{OUT}/V_{IN})

fosc : Switching frequency (2.0 MHz or 3.2 MHz)

ex) At V_{IN} = 3.7 V, V_{OUT} = 2.5 V, I_{OUT} = 0.8 A, L = 2.2 µH, fosc = 2.0 MHz
The maximum peak current value I_{PK};

$$I_{PK} = I_{OUT} + \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{2 \times L \times fosc \times V_{IN}} = 0.8\ A + \frac{(3.7\ V - 2.5\ V) \times 2.5\ V}{2 \times 2.2\ \mu H \times 2.0\ MHz \times 3.7\ V} \fallingdotseq 0.89\ A$$

- **I/O capacitor selection**
- Select a low equivalent series resistance (ESR) for the VDD input capacitor to suppress dissipation from ripple currents.

- Also select a low equivalent series resistance (ESR) for the output capacitor. The variation in the inductor current causes ripple currents on the output capacitor which, in turn, causes ripple voltages an output equal to the amount of variation multiplied by the ESR value. The output capacitor value has a significant impact on the operating stability of the device when used as a DC/DC converter. Therefore, FUJITSU MICROELECTRONICS generally recommends a 4.7 µF capacitor, or a larger capacitor value can be used if ripple voltages are not suitable. If the V_{IN}/V_{OUT} voltage difference is within 0.6 V, the use of a 10 µF output capacitor value is recommended.

- Types of capacitors
  Ceramic capacitors are effective for reducing the ESR and afford smaller DC/DC converter circuit. However, power supply functions as a heat generator, therefore avoid to use capacitor with the F-temperature rating (– 80% to + 20%). FUJITSU MICROELECTRONICS recommends capacitors with the B-temperature rating (± 10% to ± 20%).
  Normal electrolytic capacitors are not recommended due to their high ESR.
  Tantalum capacitor will reduce ESR, however, it is dangerous to use because it turns into short mode when damaged. If you insist on using a tantalum capacitor, FUJITSU MICROELECTRONICS recommends the type with an internal fuse.

[2] Output voltage setting

The output voltage V_{OUT} of the MB39C006A is defined by the voltage input to VREFIN. Supply the voltage for inputting to VREFIN from an external power supply, or set the VREF output by dividing it with resistors.
The output voltage when the VREFIN voltage is set by dividing the VREF voltage with resistors is shown in the following formula.

$$V_{OUT} = 2.97 \times V_{REFIN}, \quad V_{REFIN} = \frac{R4}{R3 + R4} \times V_{REF}$$

(V_{REF} = 1.20 V)

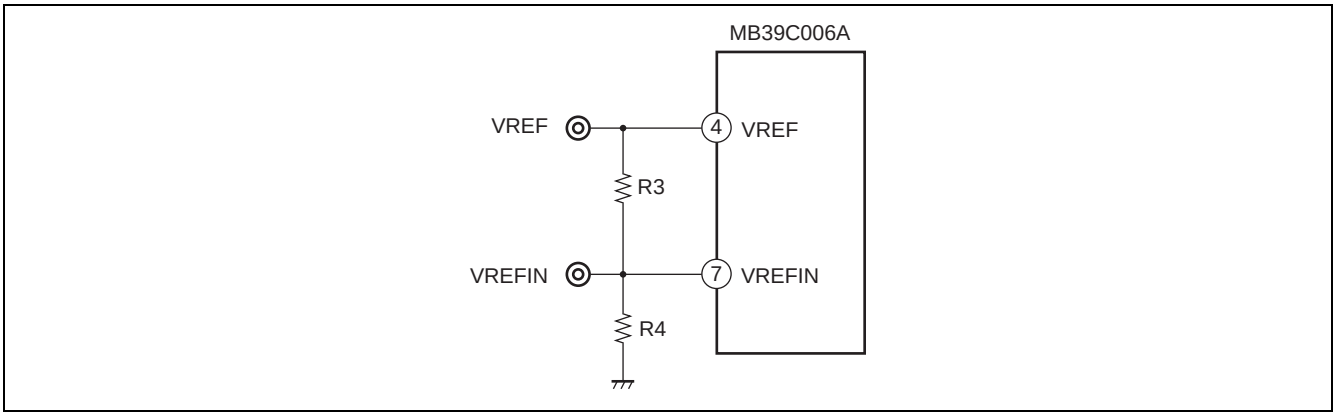

Note : See "■ APPLICATIN CIRCUIT EXAMPLES" for an example of this circuit.

Although the output voltage is defined according to the dividing ratio of resistance, select the resistance value so that the current flowing through the resistance does not exceed the VREF current rating (1 mA) .

[3] About conversion efficiency

The conversion efficiency can be improved by reducing the loss of the DC/DC converter circuit.

The total loss (P_{LOSS}) of the DC/DC converter is roughly divided as follows :

$$P_{LOSS} = P_{CONT} + P_{SW} + P_C$$

P_{CONT} : Control system circuit loss (The power to operate the MB39C006A, including the gate driving power for internal SW FETs)

P_{SW} : Switching loss (The loss caused during the switch of the IC's internal SW FETs)

P_C : Continuity loss (The loss caused when currents flow through the IC's internal SW FETs and external circuits)

The IC's control circuit loss (P_{CONT}) is extremely small, several tens of mW* with no load.

As the IC contains FETs which can switch faster with less power, the continuity loss (P_C) is more predominant as the loss during heavy-load operation than the control circuit loss (P_{CONT}) and switching loss (P_{SW}) .

* : The loss in the successive operation mode. This IC suppresses the loss in order to execute the PFM operation in the low load mode (less than 100 µA in no load mode). Mode is changed by the current peak value I_{PK} which flows into switching FET. The threshold value is about 30 mA.

[5] Transient response

Normally, I_{OUT} is suddenly changed while V_{IN} and V_{OUT} are maintained constant, responsiveness including the response time and overshoot/undershoot voltage is checked. As the MB39C006A has built-in Error Amp with an optimized design, it shows good transient response characteristics. However, if ringing upon sudden change of the load is high due to the operating conditions, add capacitor C6 (e.g. 0.1 µF). (Since this capacitor C6 changes the start time, check the start waveform as well.) This action is not required for DAC input.

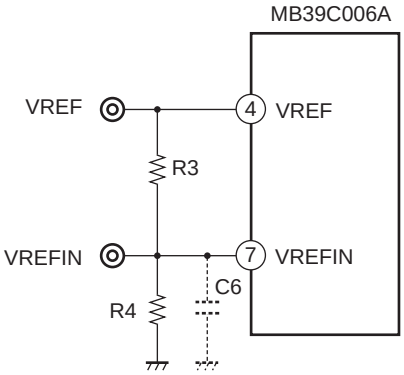

[6] Board layout, design example

The board layout needs to be designed to ensure the stable operation of the MB39C006A.
Follow the procedure below for designing the layout.

- Arrange the input capacitor (Cin) as close as possible to both the VDD and GND pins. Make a through hole (TH) near the pins of this capacitor if the board has planes for power and GND.
- Large AC currents flow between the MB39C006A and the input capacitor (Cin), output capacitor (C_O), and external inductor (L). Group these components as close as possible to the MB39C006A to reduce the overall loop area occupied by this group. Also try to mount these components on the same surface and arrange wiring without through hole wiring. Use thick, short, and straight routes to wire the net (The layout by planes is recommended.).
- The feedback wiring to the OUT should be wired from the voltage output pin closest to the output capacitor (C_O). The OUT pin is extremely sensitive and should thus be kept wired away from the LX pin of the MB39C006A as far as possible.
- If applying voltage to the VREFIN pin through dividing resistors, arrange the resistors so that the wiring can be kept as short as possible. Also arrange them so that the GND pin of the VREFIN resistor is close to the IC's GND pin. Further, provide a GND exclusively for the control line so that the resistor can be connected via a path that does not carry current. If installing a bypass capacitor for the VREFIN, put it close to the VREFIN pin.
- Try to make a GND plane on the surface to which the MB39C006A will be mounted. For efficient heat dissipation when using the SON 10 package, FUJITSU MICROELECTRONICS recommends providing a thermal via in the footprint of the thermal pad.

Layout Example of IC SW components

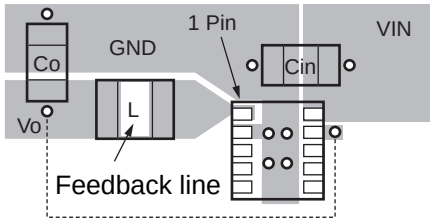

- **Notes for Circuit Design**
  - The switching operation of the MB39C006A works by monitoring and controlling the peak current which, incidentally, serves as form of short-circuit protection. However, do not leave the output short-circuited for long periods of time. If the output is short-circuited where VIN < 2.9 V, the current limit value (peak current to the inductor) tends to rise. Leaving in the short-circuit state, the temperature of the MB39C006A will continue rising and activate the thermal protection.
    Once the thermal protection stops the output, the temperature of the IC will go down and operation will resume, after which the output will repeat the starting and stopping.
    Although this effect will not destroy the IC, the thermal exposure to the IC over prolonged hours may affect the peripherals surrounding it.

■ EXAMPLE OF STANDARD OPERATION CHARACTERISTICS

(Shown below is an example of characteristics for connection according to“■ TEST CIRCUIT FOR MEASURING TYPICAL OPERATING CHARACTERISTICS”.)

Conversion efficiency vs. Load current
(2.0 MHz:PFM/PWM mode)

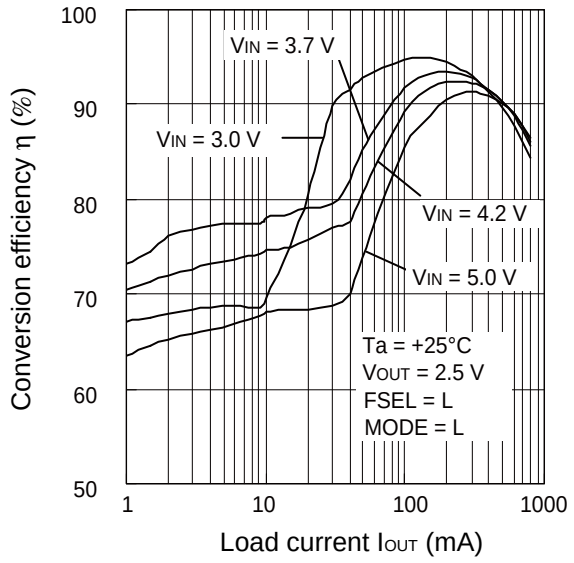

Conversion efficiency vs. Load current
(2.0 MHz:PFM/PWM mode)

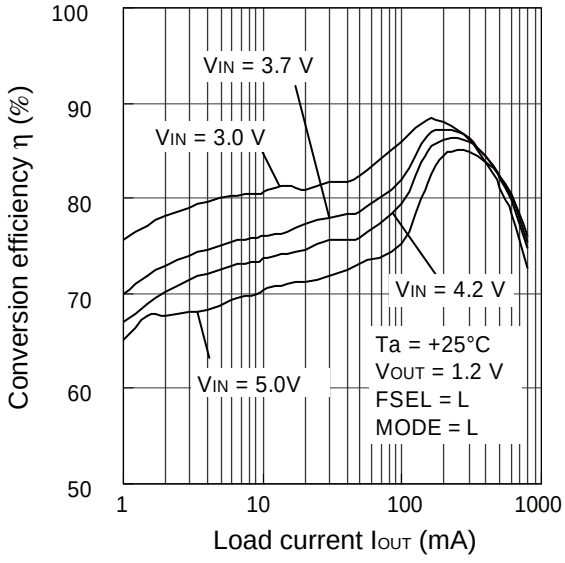

Conversion efficiency vs. Load current
(2.0 MHz:PFM/PWM mode)

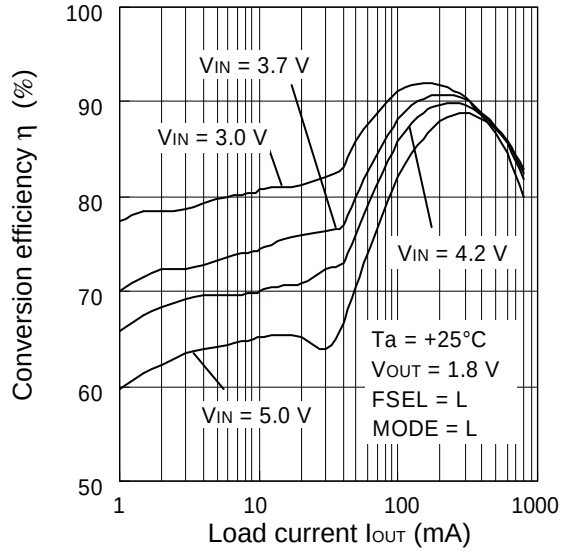

Conversion efficiency vs. Load current
(2.0 MHz:PFM/PWM mode)

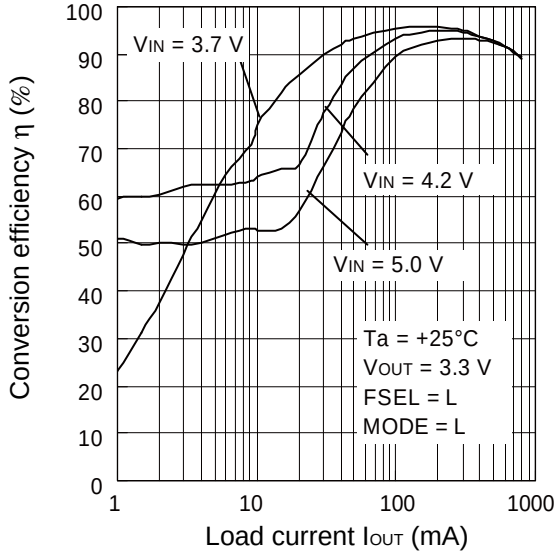

(Continued)

Conversion efficiency vs. Load current
(2.0 MHz:PWM fixed mode)

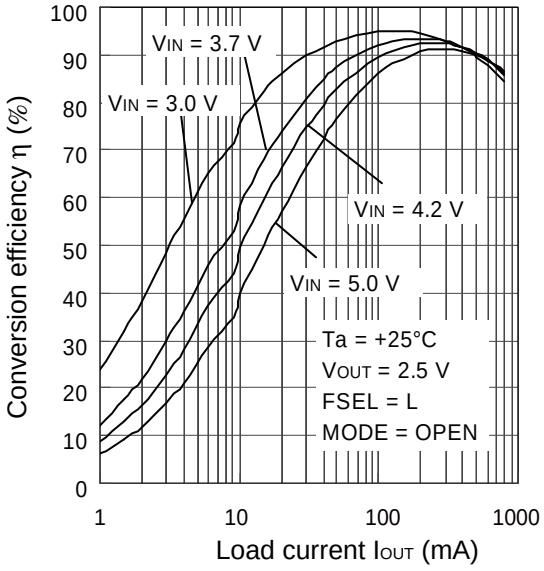

Conversion efficiency vs. Load current
(2.0 MHz:PWM fixed mode)

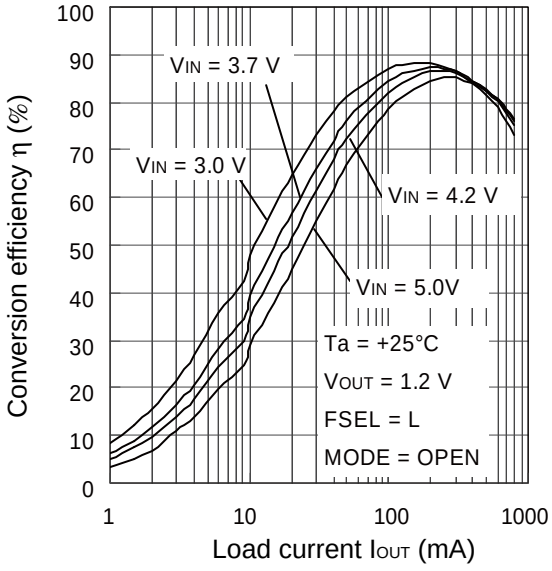

Conversion efficiency vs. Load current
(2.0 MHz:PWM fixed mode)

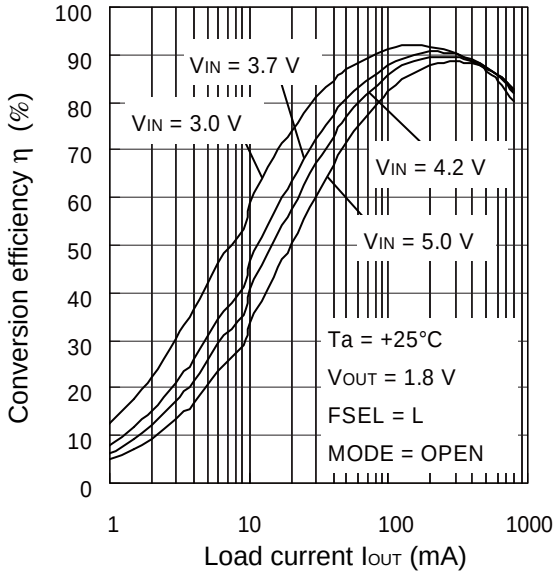

Conversion efficiency vs. Load current
(2.0 MHz:PWM fixed mode)

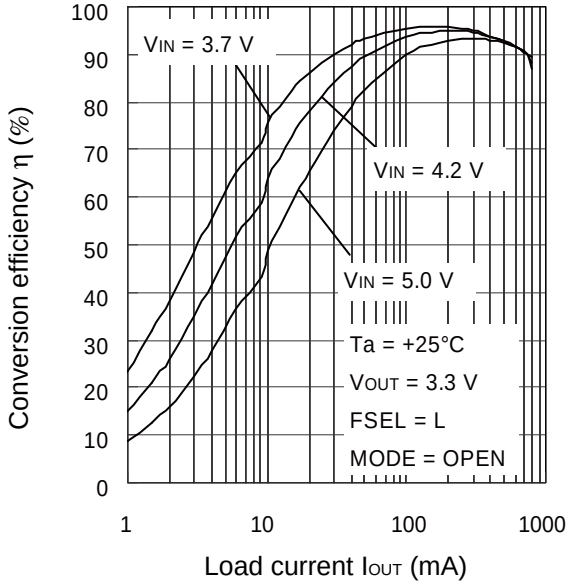

(Continued)

Output voltage vs. Input voltage
(2.0 MHz: PFM/PWM mode)

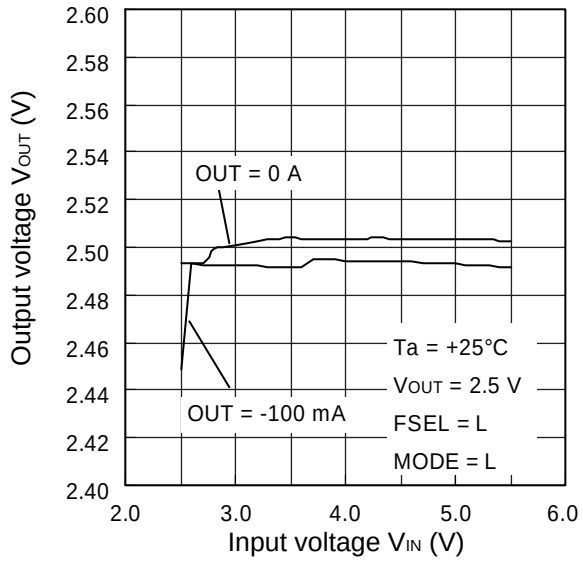

Output voltage vs. Input voltage
(3.2 MHz: PFM/PWM mode)

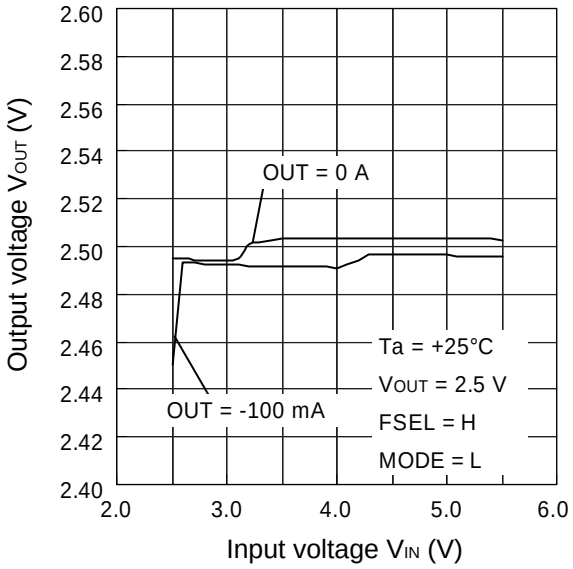

Output voltage vs. Input voltage
(2.0 MHz: PWM fixed mode)

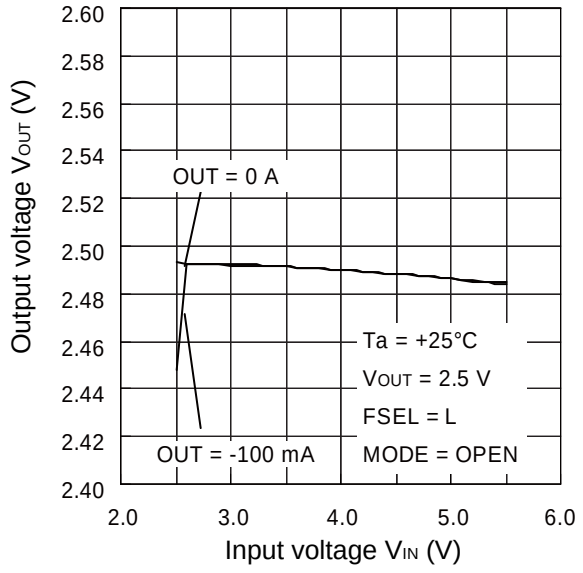

Output voltage vs. Input voltage
(3.2 MHz: PWM fixed mode)

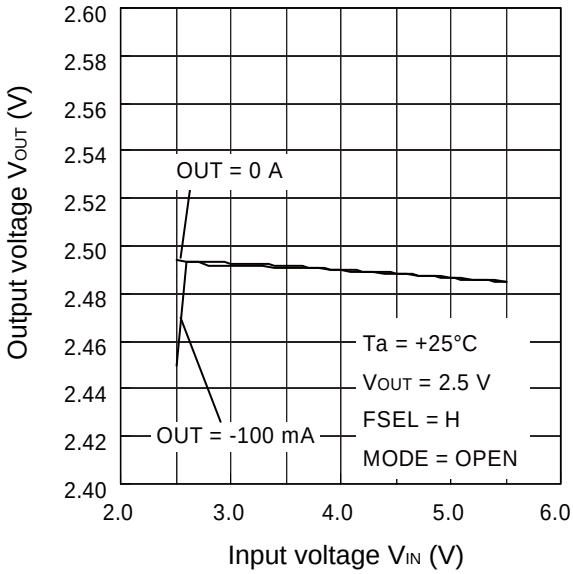

(Continued)

Output voltage vs. Load current
(2.0 MHz)

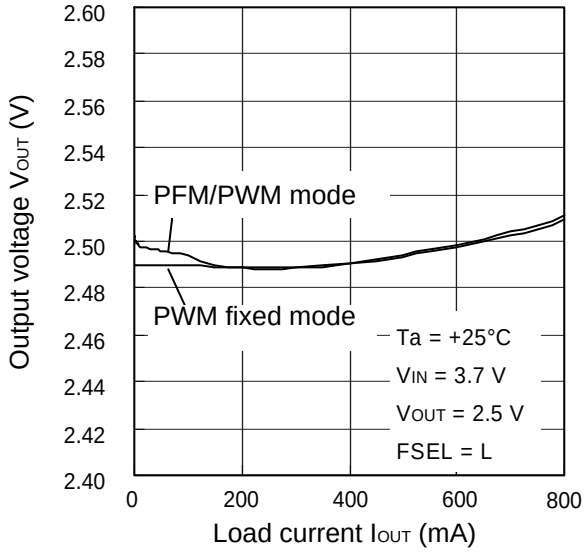

Output voltage vs. Load current
(3.2 MHz)

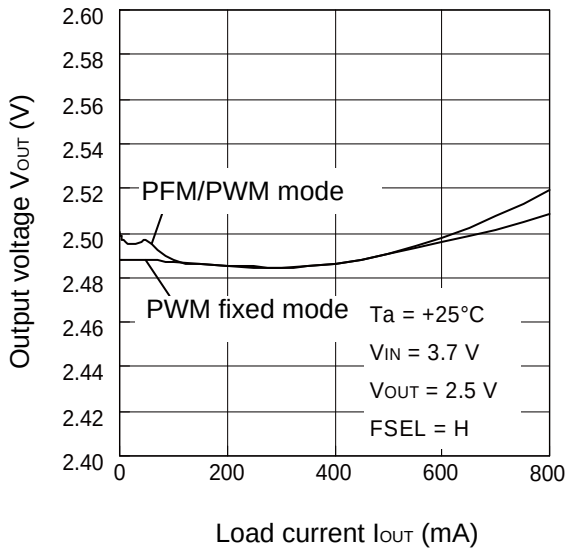

Reference voltage vs. Input voltage
(2.0 MHz: PFM/PWM mode)

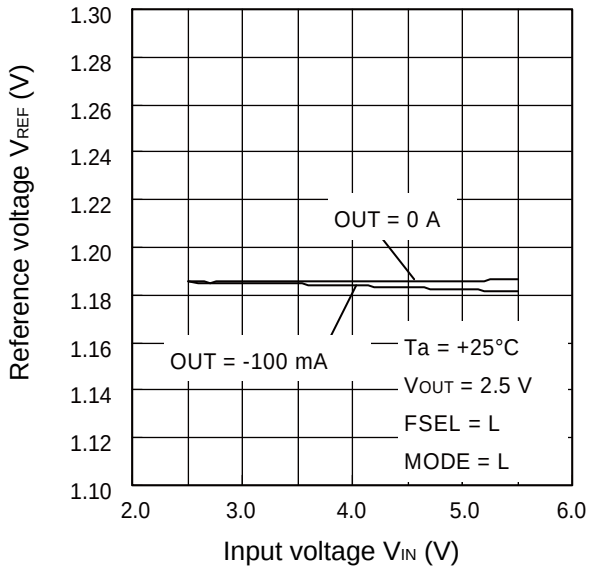

Reference voltage vs.
Operating ambient temperature
(2.0 MHz: PFM/PWM mode)

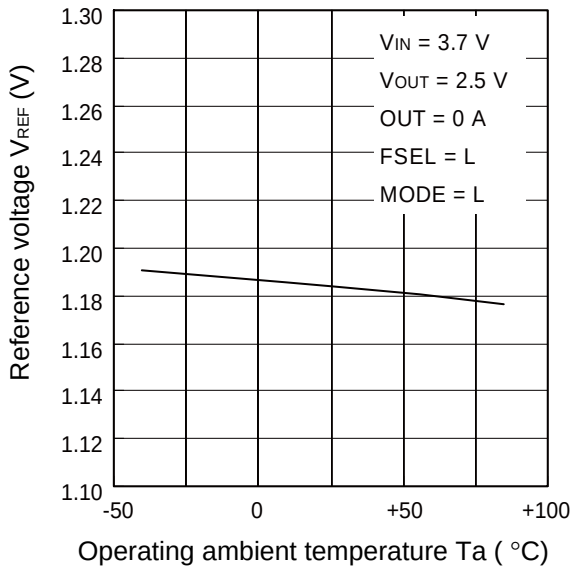

(Continued)

Input current vs. Input voltage
(PFM/PWM mode)

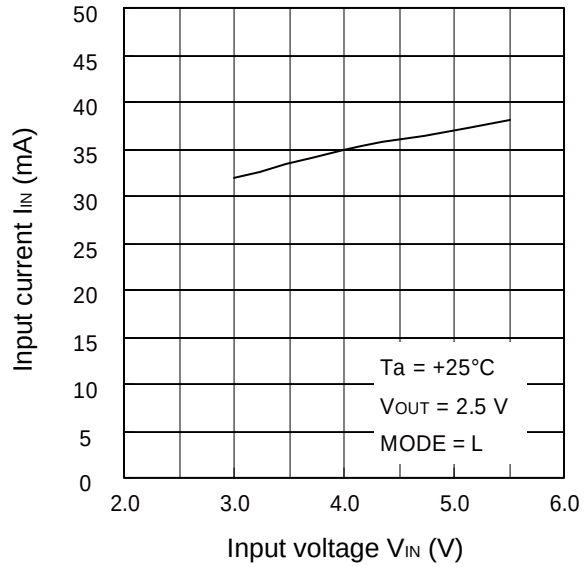

Input current vs. Input voltage
(PWM fixed mode)

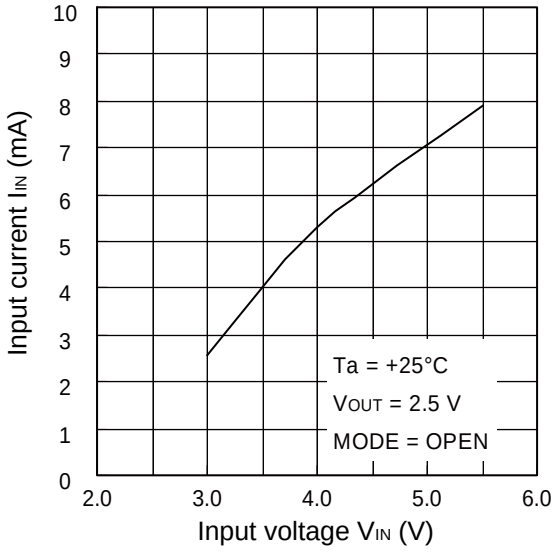

Input current vs.
Operating ambient temperature
(PFM/PWM mode)

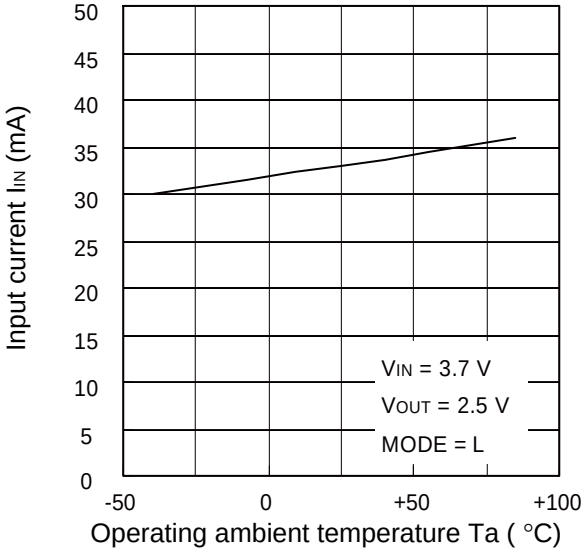

Input current vs.
Operating ambient temperature
(PWM fixed mode)

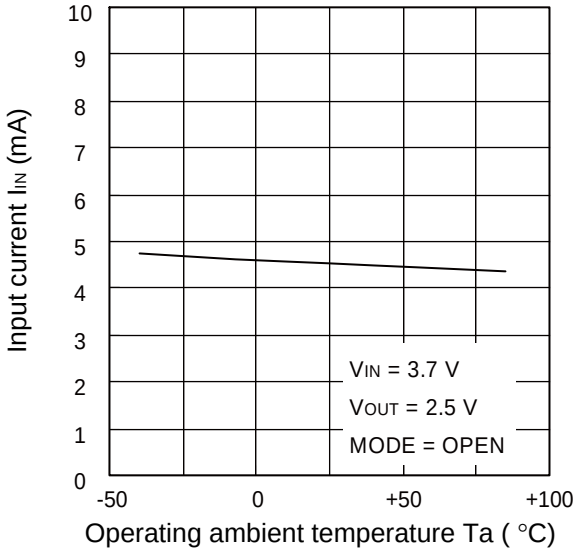

(Continued)

Oscillation frequency vs. Input voltage
(2.0 MHz)

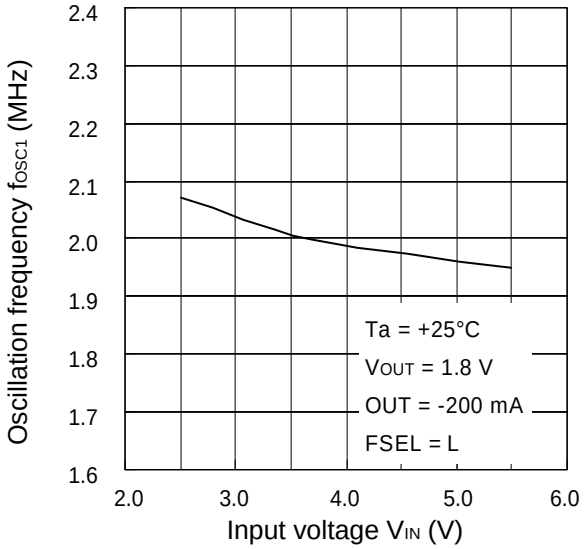

Oscillation frequency vs. Input voltage
(3.2 MHz)

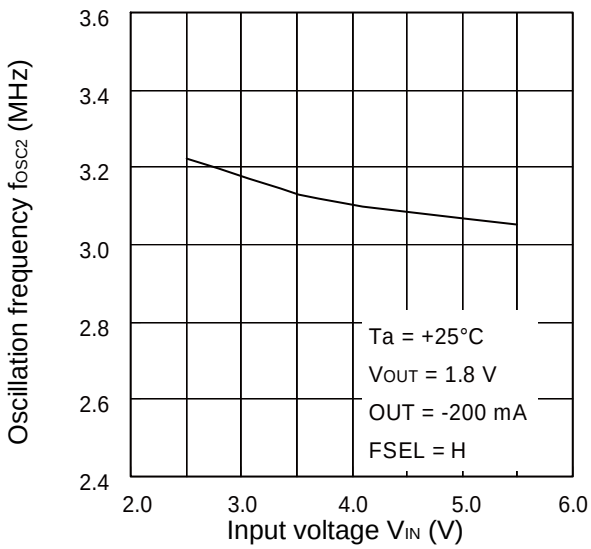

Oscillation frequency vs.
Operating ambient temperature
(2.0 MHz)

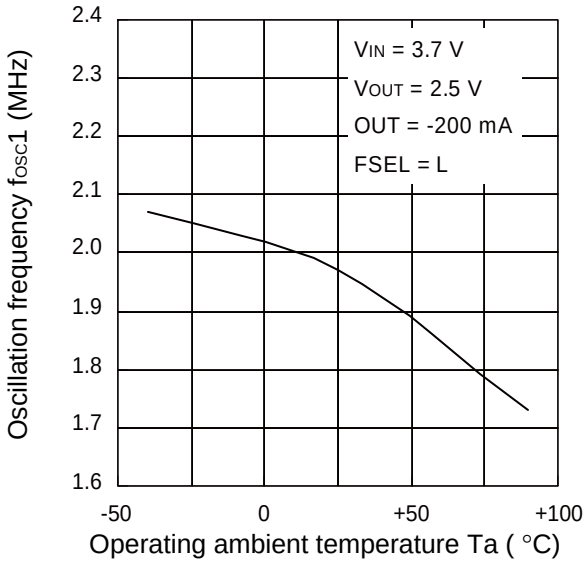

Oscillation frequency vs.
Operating ambient temperature
(3.2 MHz)

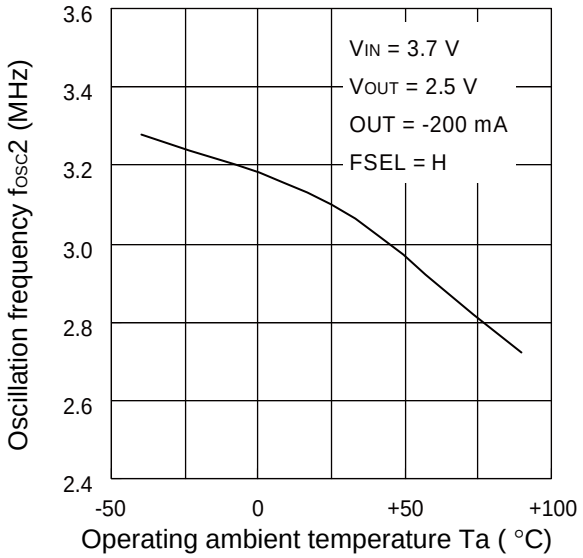

(Continued)

MOS FET
ON resistance vs. Input voltage

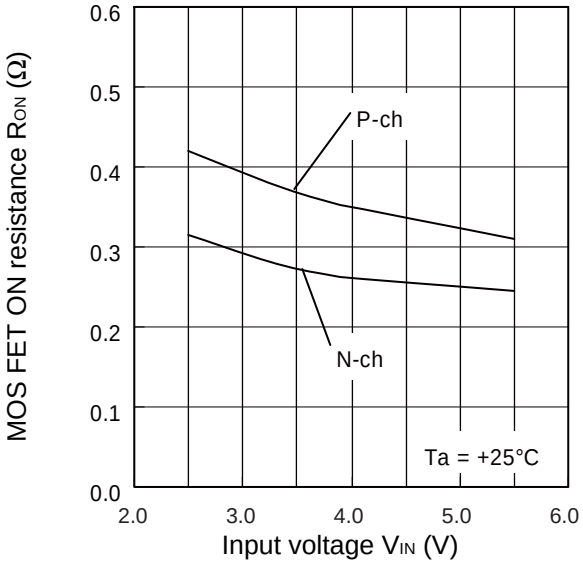

P-ch MOS FET
ON resistance vs. Operating ambient temperature

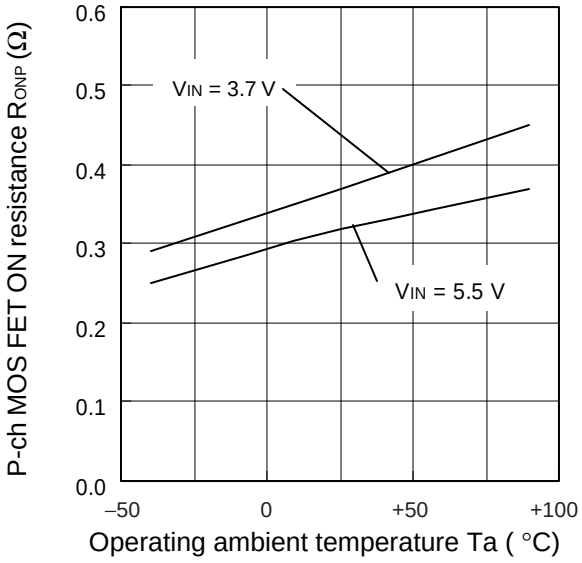

N-ch MOS FET
ON resistance vs. Operating ambient temperature

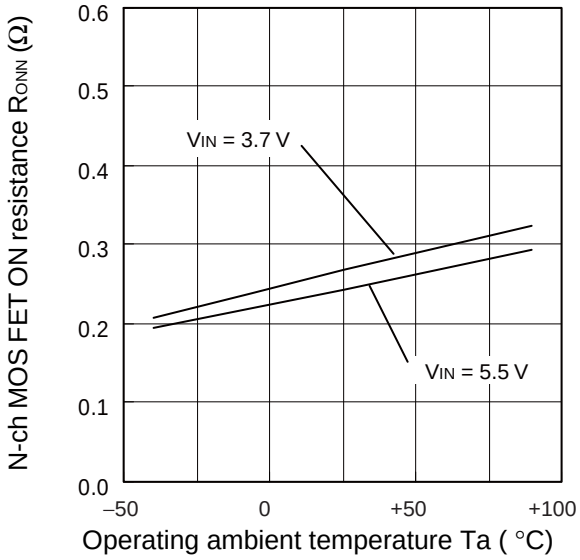

(Continued)

(Continued)

MODE V_{TH} vs. Input voltage

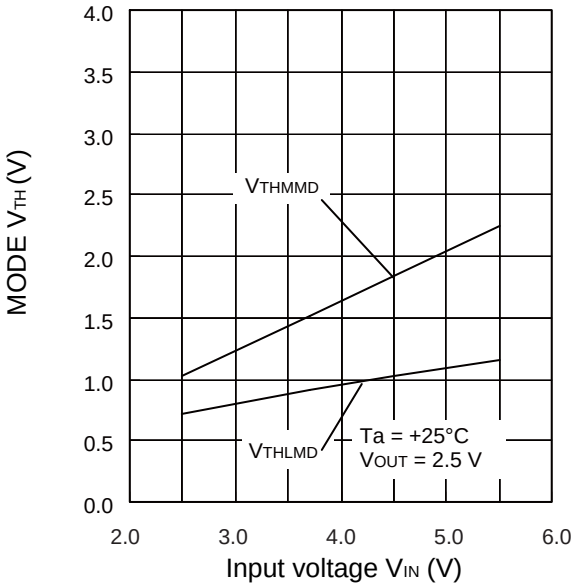

CTL V_{TH} vs. Input voltage

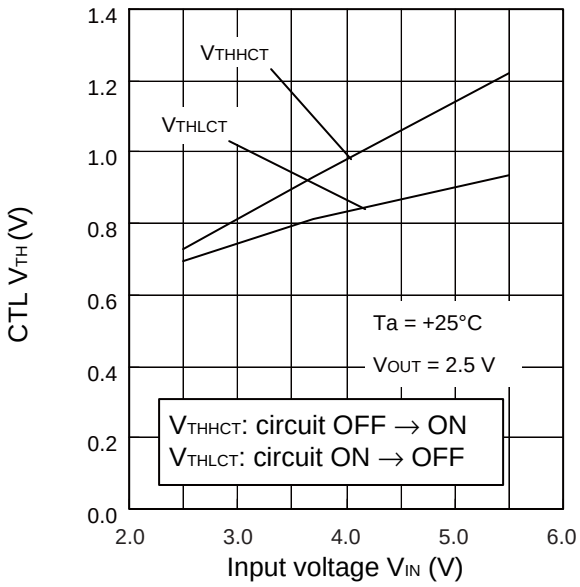

Power dissipation vs.
Operating ambient temperature
(with thermal via)

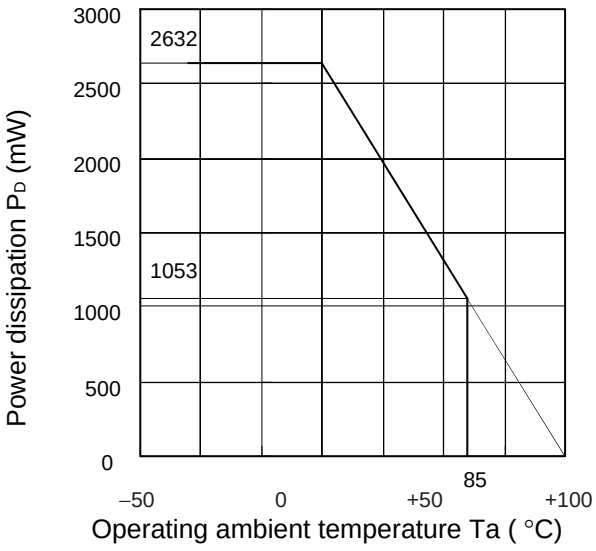

Power dissipation vs.
Operating ambient temperature
(without thermal via)

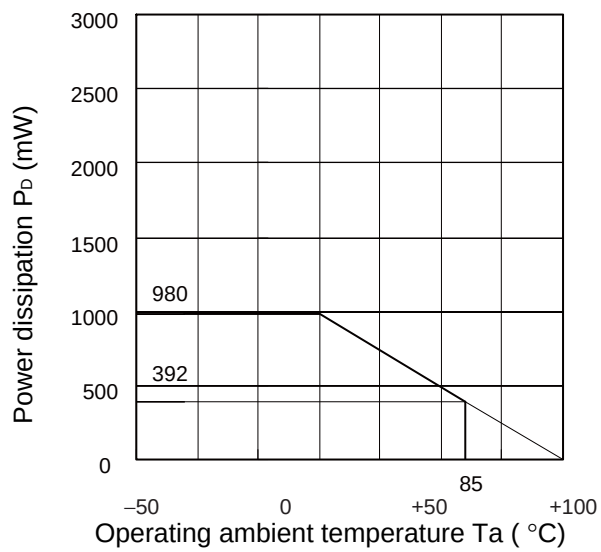

- Switching waveforms

  - PFM/PWM operation

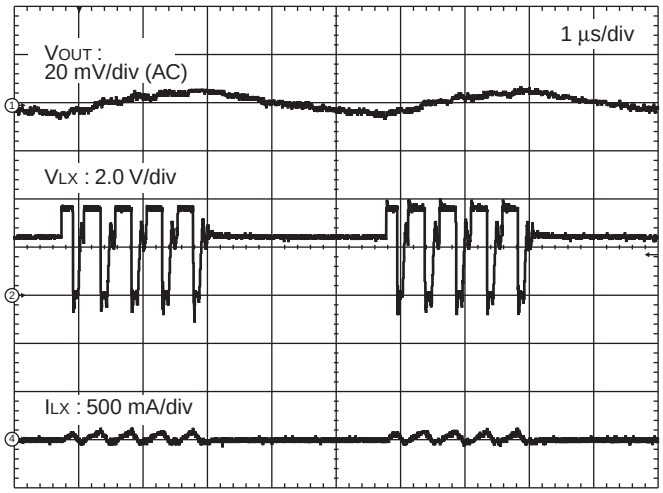

VIN = 3.7 V, IOUT = –20 mA, VOUT = 2.5 V, MODE = L, Ta = +25 °C

  - PWM operation

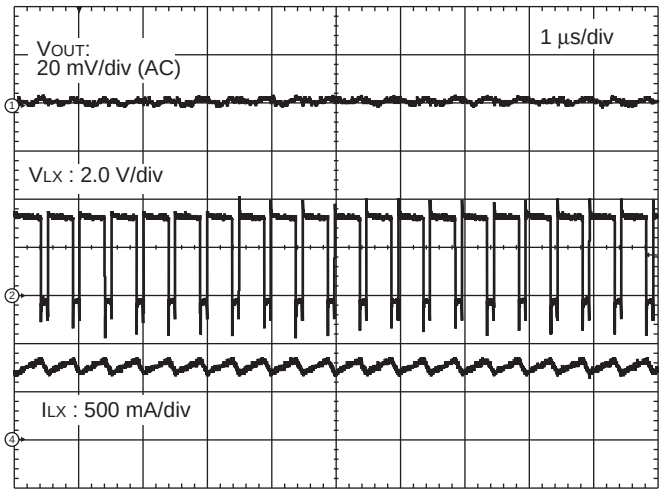

VIN = 3.7 V, IOUT = –800 mA, VOUT = 2.5 V, MODE = L, Ta = +25 °C

- Output waveforms at sudden load changes (0 A ↔ – 800 mA)

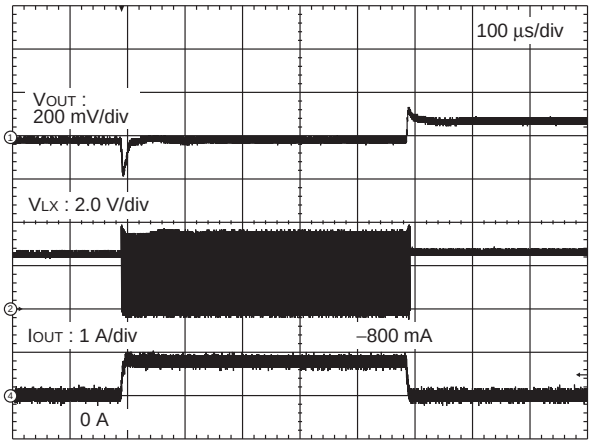

VIN = 3.7 V, VOUT = 2.5 V, MODE = L, Ta = +25 °C

- Output waveforms at sudden load changes (– 20 mA ↔ – 800 mA)

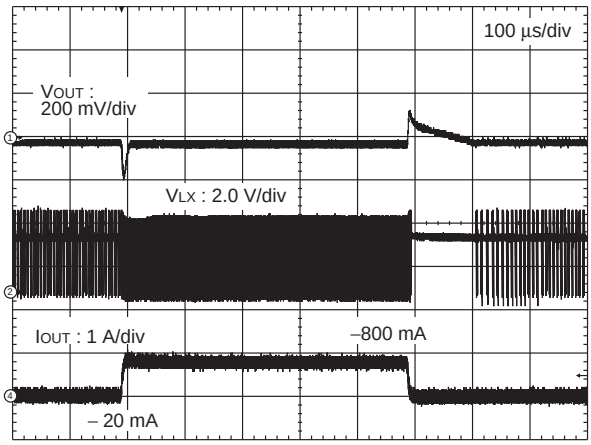

VIN = 3.7 V, VOUT = 2.5 V, MODE = L, Ta = +25 °C

- Output waveforms at sudden load changes (– 100 mA ↔ – 800 mA)

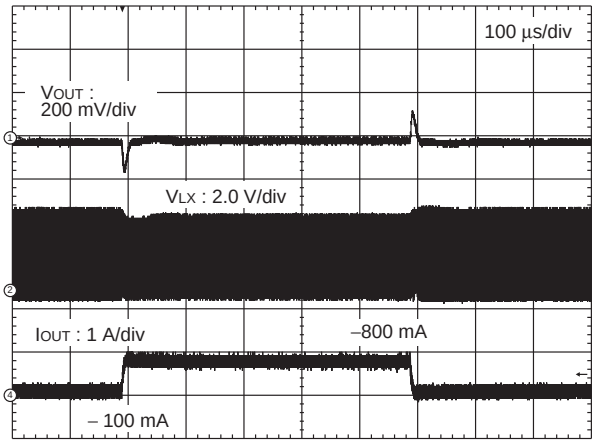

VIN = 3.7 V, VOUT = 2.5 V, MODE = L, Ta = +25 °C

- CTL start-up waveform

(No load, No VREFIN capacitor)

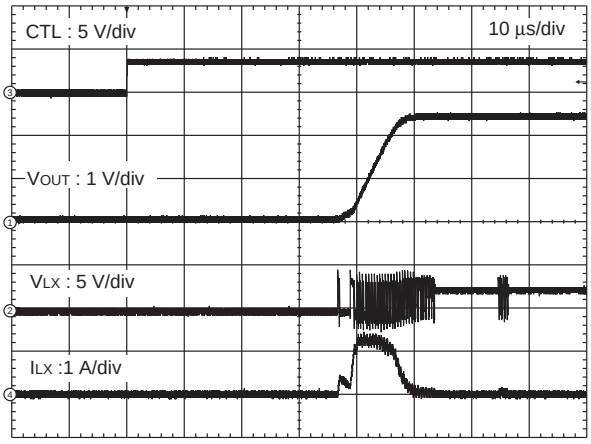

VIN = 3.7 V, IOUT = 0 A, VOUT = 2.5 V, MODE = L, Ta = +25 °C

(Maximum load, No VREFIN capacitor)

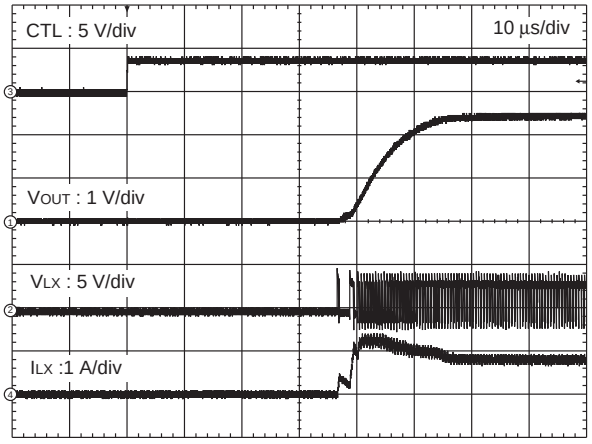

VIN = 3.7 V, IOUT = –800 mA, (3.125 Ω) VOUT = 2.5 V, MODE = L, Ta = +25 °C

(No load, VREFIN capacitor = 0.1 µF)

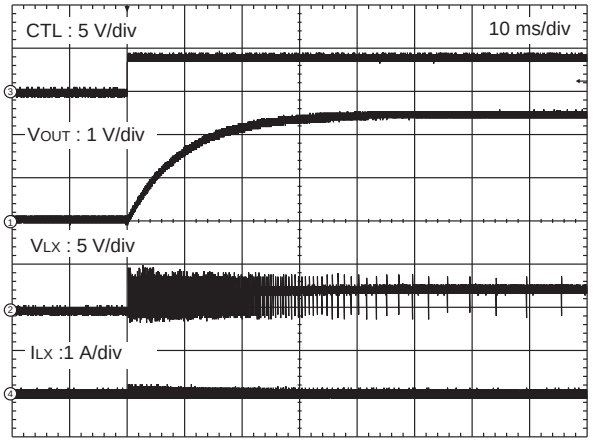

VIN = 3.7 V, IOUT = 0 A, VOUT = 2.5 V, MODE = L, Ta = +25 °C

(Maximum load, VREFIN capacitor = 0.1 µF)

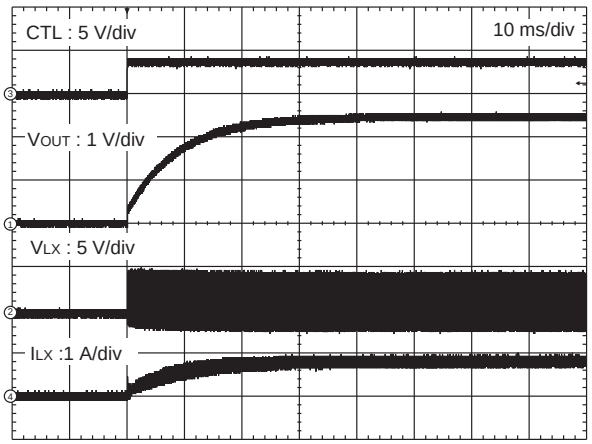

VIN = 3.7 V, IOUT = –800 mA, (3.125 Ω) VOUT = 2.5 V, MODE = L, Ta = +25 °C

- CTL stop waveform (No load, VREFIN capacitor = 0.1 μF)

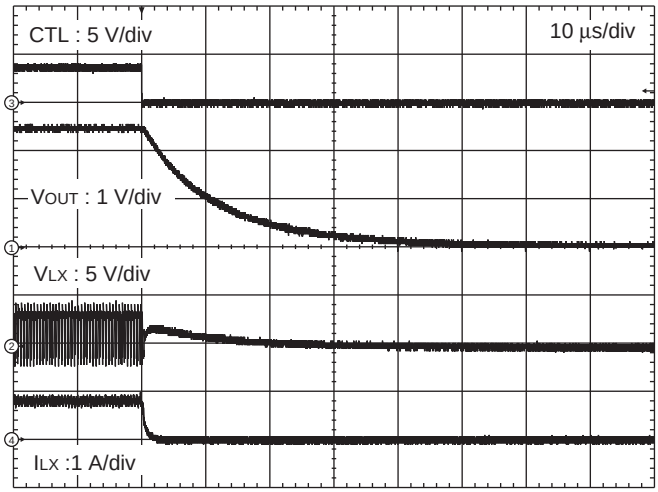

VIN = 3.7 V, IOUT = –800 mA, (3.125 Ω) VOUT = 2.5 V,
MODE = L, Ta = +25 °C

- Current limitation waveform

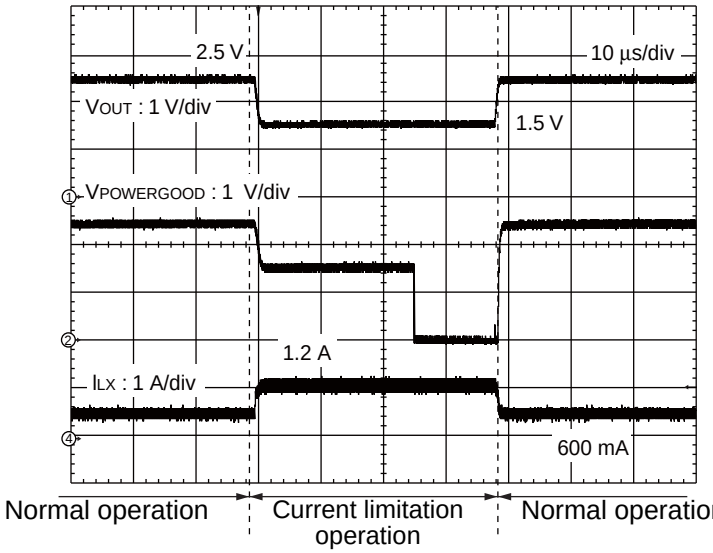

VIN = 3.7 V, IOUT = –600 mA (4.2 Ω) ⇔ IOUT = –1.2 A (2.1 Ω) VOUT = 2.5 V, MODE = L,Ta = +25 °C

■ APPLICATION CIRCUIT EXAMPLES

- **APPLICATION CIRCUIT EXAMPLE 1**
- An external voltage is input to the reference voltage external input (VREFIN) , and the V_{OUT} voltage is set to 2.97 times as much as the V_{OUT} setting gain.

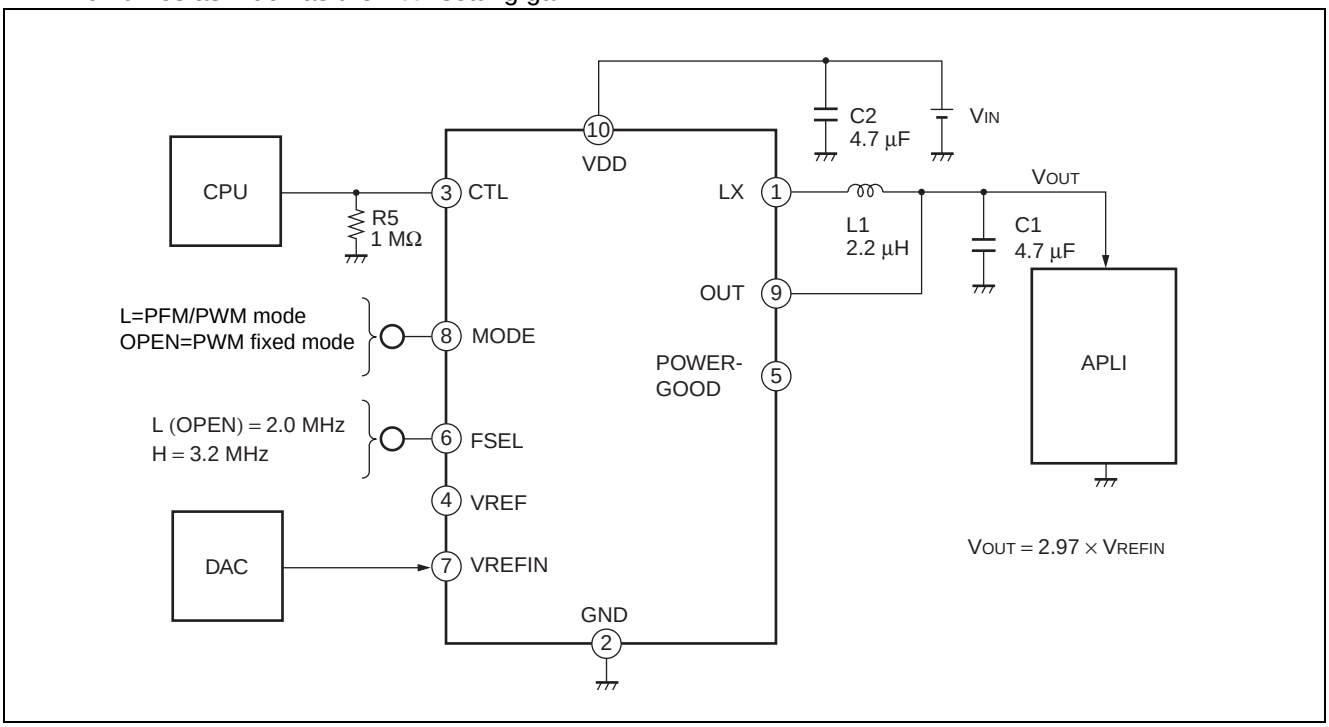

- **APPLICATION CIRCUIT EXAMPLE 2**
- The voltage of VREF pin is input to the reference voltage external input (VREFIN) by the dividing resistors. The V_{OUT} voltage is set to 2.5 V.

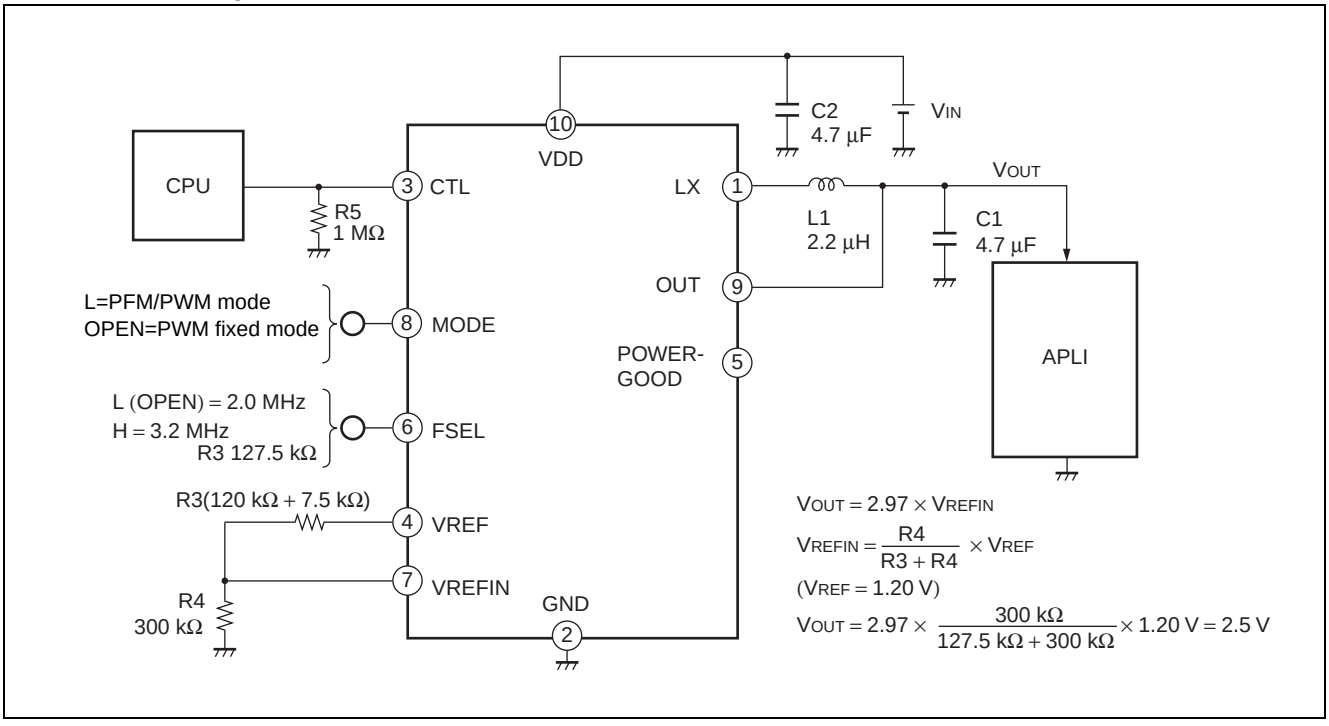

• **Application Circuit Example Components List**

Component	Item	Part Number	Specification	Package	Vendor
L1	Inductor	VLF4012AT-2R2M	2.2 µH, RDC = 76 mΩ	SMD	TDK
		MIPW3226D2R2M	2.2 µH, RDC = 100 mΩ	SMD	FDK
C1	Ceramic capacitor	C2012JB1A475K	4.7 µF (10 V)	2012	TDK
C2	Ceramic capacitor	C2012JB1A475K	4.7 µF (10 V)	2012	TDK
R3	Resistor	RK73G1JTTD D 7.5 kΩ RK73G1JTTD D 120 kΩ	7.5 kΩ 120 kΩ	1608 1608	KOA
R4	Resistor	RK73G1JTTD D 300 kΩ	300 kΩ	1608	KOA
R5	Resistor	RK73G1JTTD D	1 MΩ ± 0.5%	1608	KOA

TDK : TDK Corporation

FDK : FDK Corporation

KOA : KOA Corporation

■ LABELING SAMPLE (LEAD FREE VERSION)

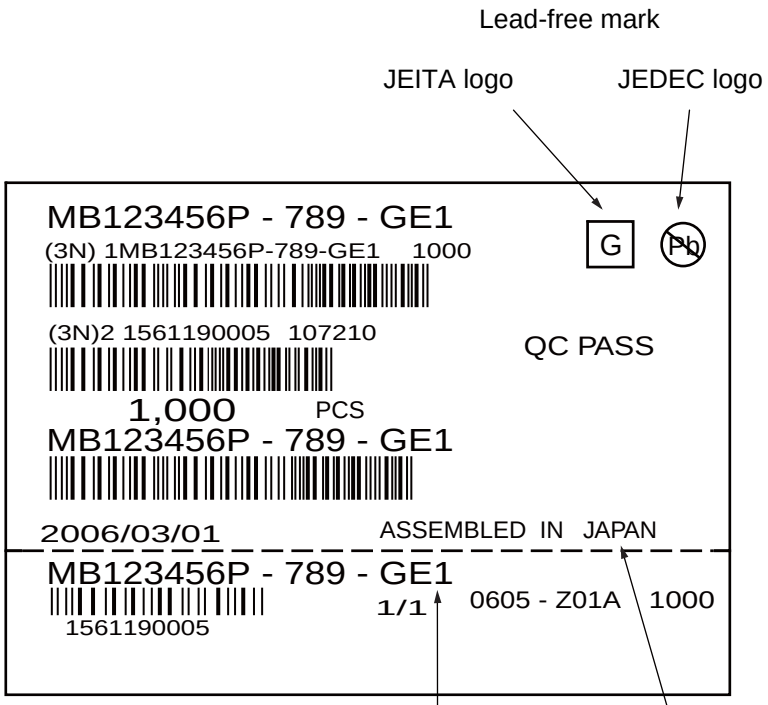

The part number of a lead-free product has the trailing characters “E1”.

“ASSEMBLED IN CHINA” is printed on the label of a product assembled in China.

■ MARKING FORMAT

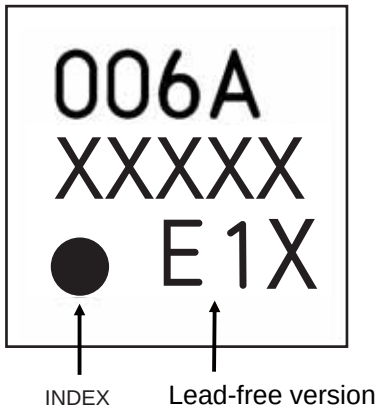

■ EVALUATION BOARD SPECIFICATION

The MB39C006A Evaluation Board provides the proper environment for evaluating the efficiency and other characteristics of the MB39C006A.

• Terminal information

Symbol	Functions
VIN	Power supply terminal. In standard condition 3.1 V to 5.5 V*. * When the VIN/VOUT difference is to be held within 0.6 V or less, such as for devices with a standard output voltage (VOUT = 2.5 V) and VIN < 3.1 V, FUJITSU MICRO-ELECTRONICS recommends to change the output capacity (C1) to 10 μF.
VOUT	Output terminal.
VCTL	Power supply terminal for setting the CTL terminal. Use this terminal by connecting with VIN (When SW is mounted).
CTL	Direct supply terminal of CTL. CTL = 0 V to 0.80 V (Typ) : Shutdown CTL = 0.95 V (Typ) to VIN : Normal operation
MODE	Direct supply terminal of MODE. MODE = 0 V to 0.4 V (Max) : PFM/PWM mode MODE = OPEN (Remove R6) : PWM mode
VREF	Reference voltage output terminal. V_{REF} = 1.20 V (Typ)
VREFIN	External reference voltage input terminal. When an external reference voltage is supplied, connect to this terminal.
FSEL	Operating frequency range setting terminal. FSEL = 0 V : 2.0 MHz operation FSEL = V_{IN} : 3.2 MHz operation* * FUJITSU MICROELECTRONICS recommends to change the inductor to 1.5 μH.
POWERGOOD	POWERGOOD output terminal. “High” level output when OUT voltage reaches 97% or more of output setting voltage.
PGND	Ground terminal. Connect power supply GND to the PGND terminal next to the VOUT terminal.
AGND	Ground terminal.

• Startup terminal information

Terminal name	Condition	Functions
CTL	L : Open H : Connect to VIN	ON/OFF switch for the IC. L : Shutdown H : Normal operation
FSEL	L : Open H : Connect to VIN	Setting switch of FSEL terminal. L : 2.0 MHz operation H : 3.2 MHz operation

• Jumper information

JP	Functions
JP1	Normally used shorted (0 Ω)
JP2	Not mounted

• Setup and checkup

(1) Setup

(1) -1. Connect the CTL terminal to the VIN terminal.

(1) -2. Connect the power supply terminal to the VIN terminal, and the power supply GND terminal to the PGND terminal. (Example of setting power supply voltage : 3.7 V)

(2) Checkup

Supply power to VIN. The IC is operating normally if VOUT = 2.5 V (Typ).

• Component layout on the evaluation board (Top View)

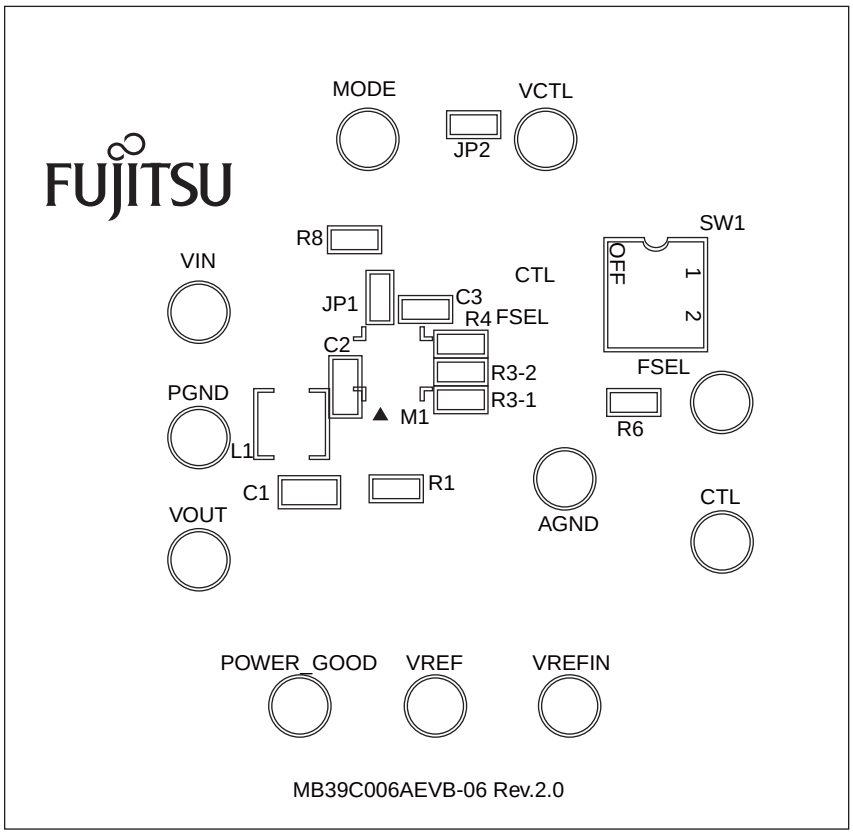

- Evaluation board layout (Top View)

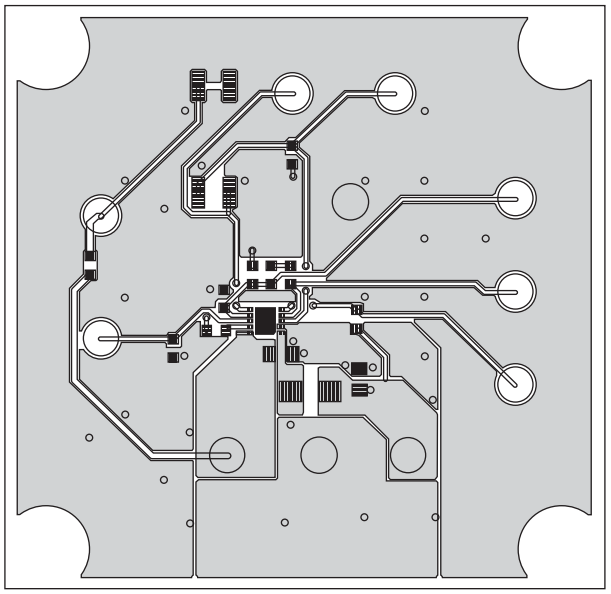

Top Side (Layer1)

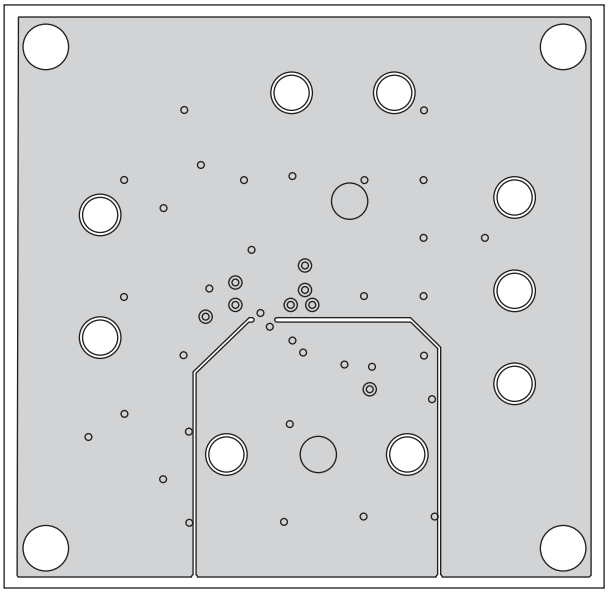

Inner Side (Layer2)

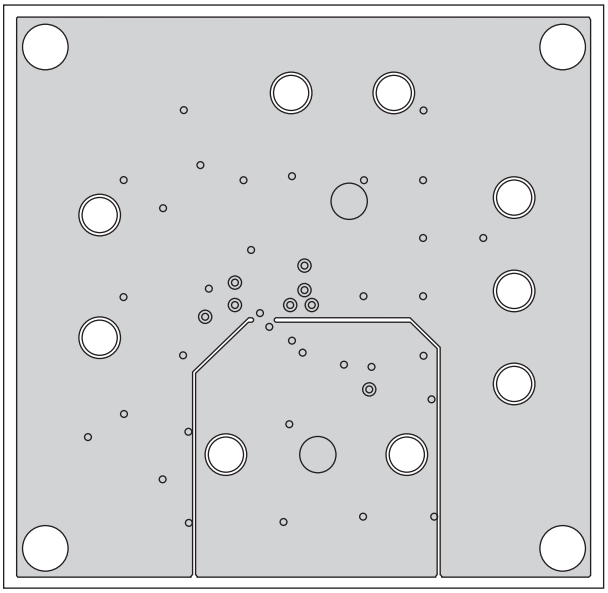

Inner Side(Layer 3)

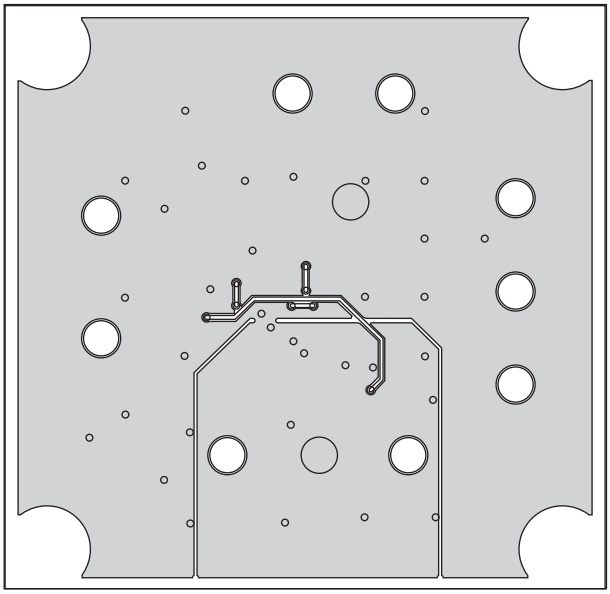

Bottom Side(Layer 4)

• Connection diagram

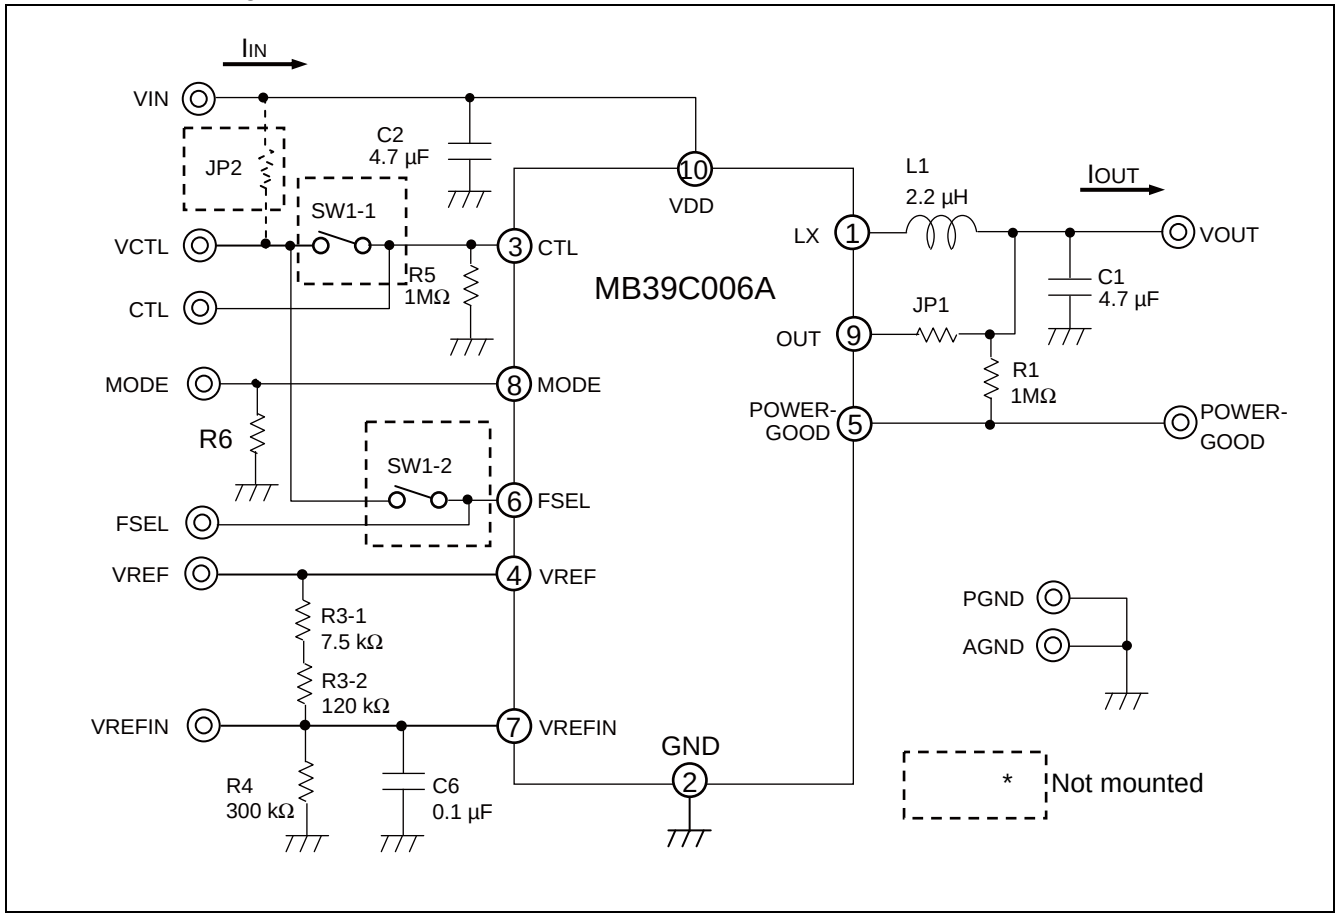

• Component list

Component	Part Name	Model Number	Specification	Package	Vendor	Remark
M1	IC	MB39C006APN	—	SON10	FML	
L1	Inductor	VLF4012AT-2R2M	2.2 µH, RDC=76 mΩ	SMD	TDK	
C1	Ceramic capacitor	C2012JB1A475K	4.7 µF (10 V)	2012	TDK	
C2	Ceramic capacitor	C2012JB1A475K	4.7 µF (10 V)	2012	TDK	
C6	Ceramic capacitor	C1608JB1H104K	0.1 µF (50 V)	1608	TDK	
R1	Resister	RK73G1JTTD D 1 MΩ	1 MΩ ± 0.5%	1608	KOA	
R3-1	Resister	RR0816P-752-D	7.5 kΩ ± 0.5%	1608	SSM	
R3-2	Resister	RR0816P-124-D	120 kΩ ± 0.5%	1608	SSM	
R4	Resister	RR0816P-304-D	300 kΩ ± 0.5%	1608	SSM	
R5	Resister	RK73G1JTTD D 1 MΩ	1 MΩ ± 0.5%	1608	KOA	
R6	Resister	RK73Z1J	0 Ω, 1A	1608	KOA	
SW1	DIP switch	—	—	—	—	Not mounted
JP1	Jumper	RK73Z1J	0 Ω, 1A	1608	KOA	
JP2	Jumper	—	—	—	—	Not mounted

Note : These components are recommended based on the operating tests authorized.

FML : FUJITSU MICROELECTRONICS LIMITED

TDK : TDK Corporation

KOA : KOA Corporation

SSM : SUSUMU Co., Ltd

■ EV BOARD ORDERING INFORMATION

EV Board Part No.	EV Board Version No.	Remarks
MB39C006AEVB-06	MB39C006AEVB-06 Rev.2.0	SON10

■ PACKAGE DIMENSION

10-pin plastic SON		
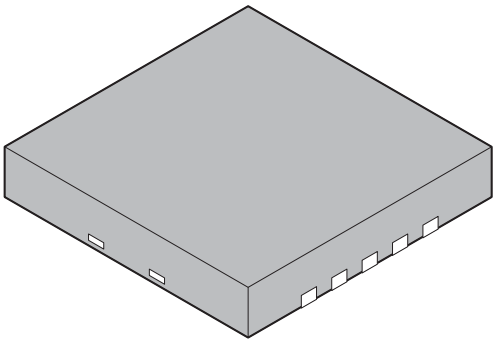	Lead pitch	0.50 mm
	Package width × package length	3.00 mm × 3.00 mm
	Sealing method	Plastic mold
	Mounting height	0.75 mm MAX
	Weight	0.018 g
(LCC-10P-M04)		

10-pin plastic SON
(LCC-10P-M04)

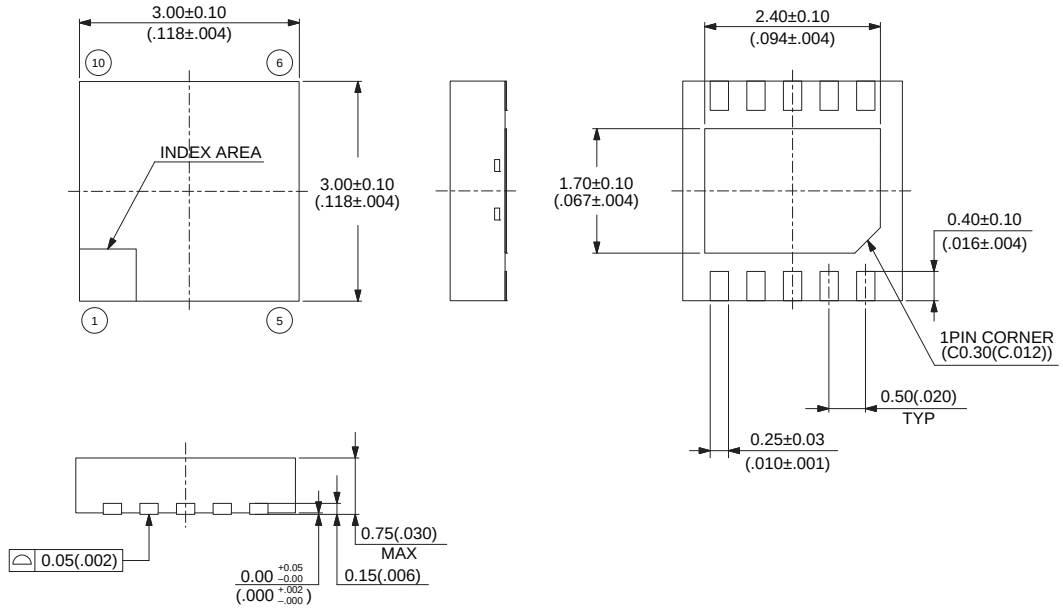

© 2008 FUJITSU MICROELECTRONICS LIMITED C10004S-c-1-2

Dimensions in mm (inches).
Note: The values in parentheses are reference values.

Please confirm the latest Package dimension by following URL.
http://edevice.fujitsu.com/package/en-search/

■ CONTENTS

page
- DESCRIPTION 1
- FEATURES 1
- APPLICATIONS 1
- PIN ASSIGNMENT 2
- PIN DESCRIPTIONS 2
- I/O PIN EQUIVALENT CIRCUIT DIAGRAM 3
- BLOCK DIAGRAM 4
- FUNCTION OF EACH BLOCK 6
- ABSOLUTE MAXIMUM RATINGS 8
- RECOMMENDED OPERATING CONDITIONS 9
- ELECTRICAL CHARACTERISTICS 10
- TEST CIRCUIT FOR MEASURING TYPICAL OPERATING CHARACTERISTICS 12
- APPLICATION NOTES 13
- EXAMPLE OF STANDARD OPERATION CHARACTERISTICS 18
- APPLICATION CIRCUIT EXAMPLES 33
- USAGE PRECAUTIONS 35
- ORDERING INFORMATION 35
- RoHS COMPLIANCE INFORMATION OF LEAD (Pb) FREE VERSION 35
- LABELING SAMPLE (LEAD FREE VERSION) 36
- MARKING FORMAT 36
- RECOMMENDED MOUNTING CONDITIONS of MB39C006APN 37
- EVALUATION BOARD SPECIFICATION 38
- EV BOARD ORDERING INFORMATION 42
- PACKAGE DIMENSION 43

MEMO

MEMO

FUJITSU MICROELECTRONICS LIMITED

Shinjuku Dai-Ichi Seimei Bldg., 7-1, Nishishinjuku 2-chome,
Shinjuku-ku, Tokyo 163-0722, Japan
Tel: +81-3-5322-3329
http://jp.fujitsu.com/fml/en/

For further information please contact:

North and South America
FUJITSU MICROELECTRONICS AMERICA, INC.
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94085-5401, U.S.A.
Tel: +1-408-737-5600 Fax: +1-408-737-5999
http://www.fma.fujitsu.com/

Europe
FUJITSU MICROELECTRONICS EUROPE GmbH
Pittlerstrasse 47, 63225 Langen, Germany
Tel: +49-6103-690-0 Fax: +49-6103-690-122
http://emea.fujitsu.com/microelectronics/

Korea
FUJITSU MICROELECTRONICS KOREA LTD.
206 Kosmo Tower Building, 1002 Daechi-Dong,
Gangnam-Gu, Seoul 135-280, Republic of Korea
Tel: +82-2-3484-7100 Fax: +82-2-3484-7111
http://kr.fujitsu.com/fmk/

Asia Pacific
FUJITSU MICROELECTRONICS ASIA PTE. LTD.
151 Lorong Chuan,
#05-08 New Tech Park 556741 Singapore
Tel : +65-6281-0770 Fax : +65-6281-0220
http://www.fmal.fujitsu.com/

FUJITSU MICROELECTRONICS SHANGHAI CO., LTD.
Rm. 3102, Bund Center, No.222 Yan An Road (E),
Shanghai 200002, China
Tel : +86-21-6146-3688 Fax : +86-21-6335-1605
http://cn.fujitsu.com/fmc/

FUJITSU MICROELECTRONICS PACIFIC ASIA LTD.
10/F., World Commerce Centre, 11 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Tel : +852-2377-0226 Fax : +852-2376-3269
http://cn.fujitsu.com/fmc/en/

Specifications are subject to change without notice. For further information please contact each office.

All Rights Reserved.
The contents of this document are subject to change without notice.
Customers are advised to consult with sales representatives before ordering.
The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MICROELECTRONICS device; FUJITSU MICROELECTRONICS does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information.
FUJITSU MICROELECTRONICS assumes no liability for any damages whatsoever arising out of the use of the information.
Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MICROELECTRONICS or any third party or does FUJITSU MICROELECTRONICS warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MICROELECTRONICS assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.
The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).
Please note that FUJITSU MICROELECTRONICS will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.
Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.
Exportation/release of any products described in this document may require necessary procedures in accordance with the regulations of the Foreign Exchange and Foreign Trade Control Law of Japan and/or US export control laws.
The company names and brand names herein are the trademarks or registered trademarks of their respective owners.

Edited: Sales Promotion Department