


SR820 thru SR860

SK820 thru SK860

MINIATURE SCHOTTKY BARRIER
RECTIFIER



CHENG-YI
ELECTRONIC

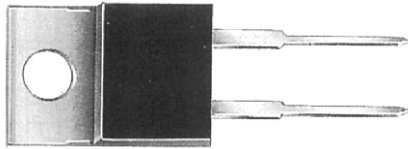

FEATURES


- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High current capability
- High surge capability
- High reliability

MECHANICAL DATA

- Case: TO-220A molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: MIL-STD-202 method 208 guaranteed
- Mounting position: Any

VOLTAGE RANGE
20 TO 80 Volts
CURRENT
8.0 Amperes

TO-220AC

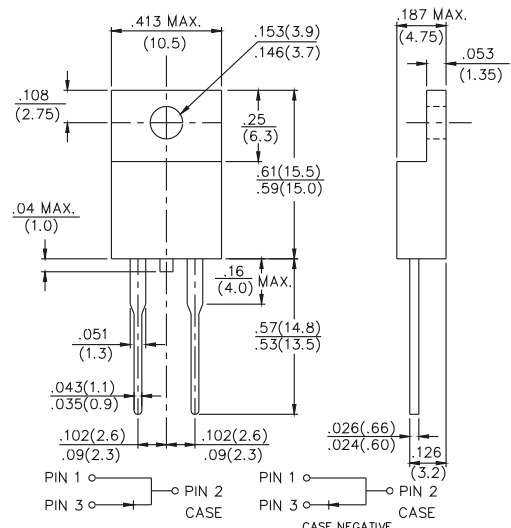

Dimensions in inches and (millimeters)

MAXIMUM RATINGS (At $T_A=25^{\circ}\text{C}$ unless otherwise noted)

	Symbol	SR820	SR830	SR835	SR840	SR845	SR850	SR860	UNITS
Ratings	Symbol	SK820	SK830	SK835	SK840	SK845	SK850	SK860	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	35	40	45	50	60	Volts
Maximum RMS Voltage	V_{RMS}	14	21	25	28	32	35	42	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	35	40	45	50	60	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) lead length	I_o	8.0							Amps
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150							Amps
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	2.5							$^{\circ}\text{C} / \text{W}$
Typical Junction Capacitance (Note 3)	C_J	700				450			pF
Operating Temperature Range	T_J	-65 to +125				-65 to +150			$^{\circ}\text{C}$
Storage and Operating Temperature Range	T_{STG}	-65 to +150							$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (At $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	SK820	SK830	SK835	SK840	SK845	SK850	SK860	UNITS
Maximum Instantaneous Forward Voltage at 8.0A DC	V_F	.65				.75			Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	@ $T_A=25^{\circ}\text{C}$	1.0							mAmps
	@ $T_A=100^{\circ}\text{C}$	30							mAmps

- Notes : 1. Thermal Resistance Junction to Case.
 2. Suffix "R" for Reverse Polarity
 3. Measured at 1MHz and applied reverse voltage of 4.0 Volts.

SR820 thru SR860

SK820 thru SK860

MINIATURE SCHOTTKY BARRIER RECTIFIER



CHENG-YI
ELECTRONIC

RATING AND CHARACTERISTICS CURVES

SR820 THRU SR860

SK820 THRU SK860

Fig.1 - TYPICAL FORWARD CURRENT DERATING CURVE

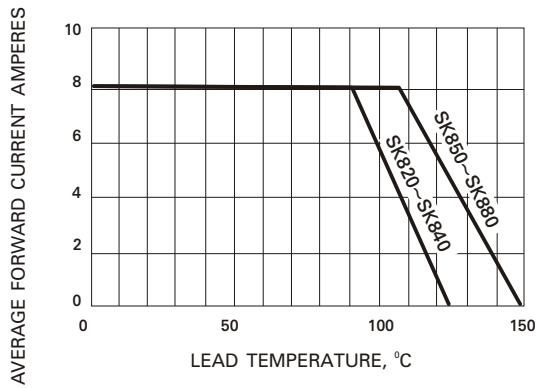


Fig.2 - TYPICAL REVERSE CHARACTERISTICS

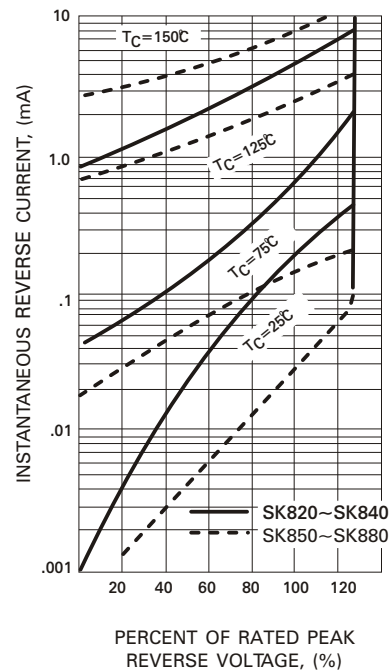


Fig.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

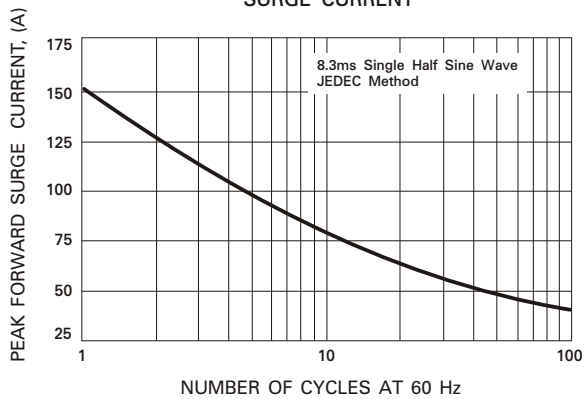


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

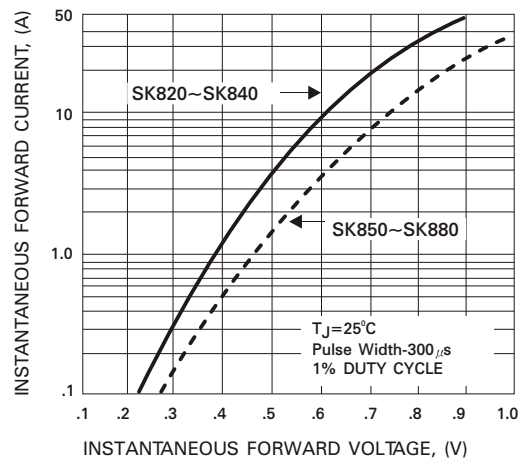


Fig.5 - TYPICAL JUNCTION CAPACITANCE

