


- Miniature Line Transformer
- Designed for use with Primary Rate ISDN Network
- Isolation : 1500 Vrms (for 1 minute)


Electrical Parameters @ 25° C

Line Side OCL (μ H Min.)	Return Loss (dB Min.)		Longitudinal Balance (dB Min.)	Impedance (Ω Typ.)				DCR (Ω Max.)			
@ 10 KHz, 0.1 Vrms	51KHz- 100 KHz	100 KHz- 3072 KHz	50 KHz- 1544 KHz								
3.5	-15	-20	-40	100	120	100	75	0.65	0.6	0.55	0.6
Pins 1-8	Pins 1-8	Pins 1-8		Pins 1-8	Pins 2-3	Pins 6-3	Pins 4-5	Pins 1-8	Pins 2-3	Pins 6-3	Pins 4-5

Schematic



Package

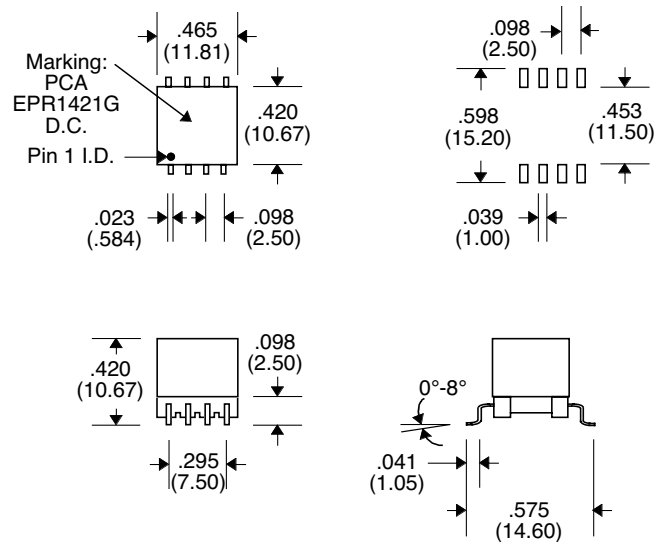

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$