

isc Silicon NPN Power Transistor


2SC3376

DESCRIPTION

- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = 800V(\text{Min.})$
- High Speed Switching


APPLICATIONS

- Switching regulator and high voltage switching applications.
- High speed DC-DC converter applications.

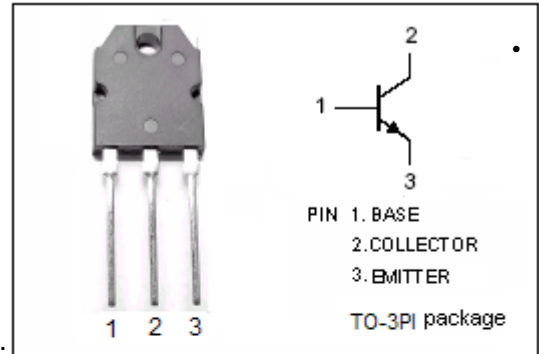

ABSOLUTE MAXIMUM RATINGS ( $T_a=25^{\circ}C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	900	V
$V_{CEO}$	Collector-Emitter Voltage	800	V
$V_{EBO}$	Emitter-Base Voltage	7	V
$I_C$	Collector Current-Continuous	3	A
$I_{CM}$	Collector Current-Peak	5	A
$I_B$	Base Current-Continuous	1	A
$P_C$	Collector Power Dissipation @ $T_C=25^{\circ}C$	60	W
$T_j$	Junction Temperature	150	$^{\circ}C$
$T_{stg}$	Storage Temperature Range	-55~150	$^{\circ}C$

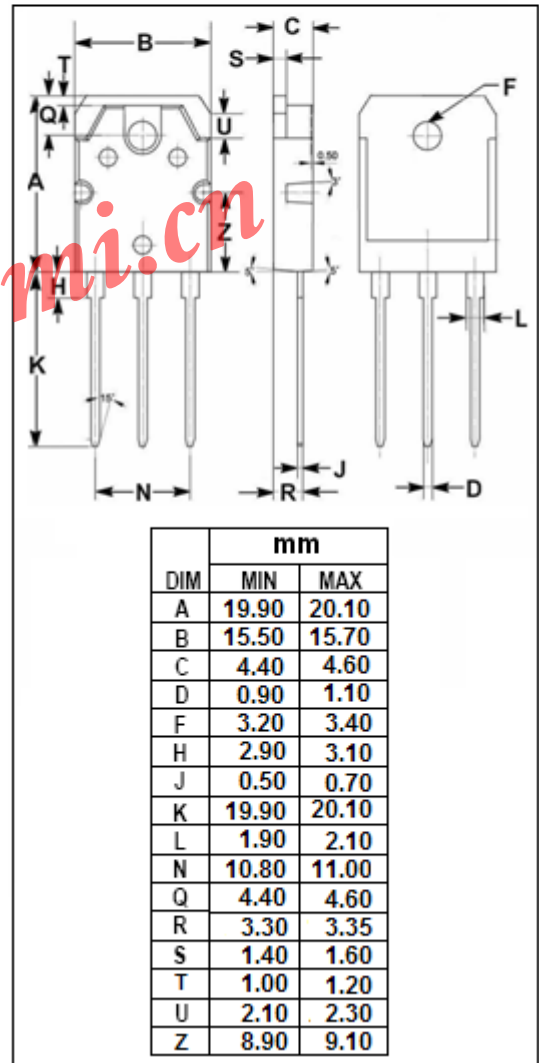

## isc Silicon NPN Power Transistor

2SC3376

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	800			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}; I_E=0$	900			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=0.8\text{A}; I_B=0.16\text{A}$			0.6	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=0.8\text{A}; I_B=0.16\text{A}$			1.2	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=800\text{V}; I_E=0$			0.1	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=7\text{V}; I_C=0$			1.0	mA
$h_{FE}$	DC Current Gain	$I_C=0.8\text{A}; V_{CE}=5\text{V}$	10			

Switching Times; Resistive Load

$t_r$	Rise Time	$I_{B1}=0.08\text{A}; I_{B2}=-0.2\text{A}; V_{CC}\approx 400\text{V}; R_L=500\Omega$			1.0	$\mu\text{s}$
$t_s$	Storage Time				4.0	$\mu\text{s}$
$t_f$	Fall Time				1.0	$\mu\text{s}$